


DUPLICATE


FORM C-105

N

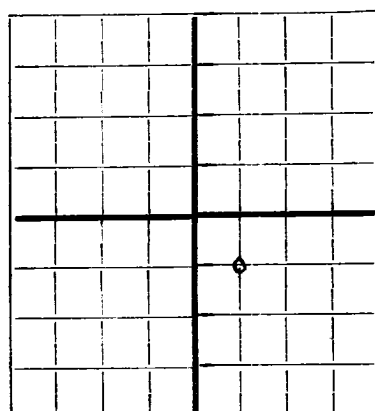

AREA 640 ACRES  
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico



WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Box 661, Tulsa, Oklahoma

Drinkard - B Company or Operator 2 SE 30 Address 228

38E Lease Penrose Lea County.

R. N. M. P. M., Field, County.

Well is 660 feet south of the North line and 1980 feet west of the East line of SE

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address.

If Government land the permittee is Address.

The Lessee is Gulf Oil Corporation Address. Tulsa, Oklahoma

Drilling commenced May 6 1946 Drilling was completed June 24 1946

Name of drilling contractor Taber and Coleman Address. Tulsa, Oklahoma

Elevation above sea level at top of casing 3354 feet. Derrick floor.

The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 6415 to 6530 No. 4, from to

No. 2, from 6840 to 6925 No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8	48	8R	Smls	315'					
9-5/8	36	8R	E W	2950'					
7"	23	8R	E W	6375'					

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/4	13-3/8	315'	300	Howco		
12-1/4	9-5/8	2950'	1300	Howco		
8-3/4	7	6375'	700	Howco		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set.

Adapters—Material Size.

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
Acidized	7-1-46	with 2000 gals.		Acidized	7-7-46	with 10,000 gals.
Acidized	7-3-46	with 1000 gals.		Acidized	7-17-46	with 2,000 gals.
Acidized	7-4-46	with 2000 gals.		Acidized	7-31-46	with 5,000 gals.
Acidized	7-5-46	with 5000 gals.		Acidized	9-16-46	with 3,000 gals.
Results of shooting or chemical treatment						

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 6984 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing August 2 1946

The production of the first 24 hours was 214 barrels of fluid of which 83 % was oil; %

emulsion; 17 % water; and % sediment. Gravity, Be 38

If gas well, cu. ft. per 24 hours. Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 12 November 1946

day of November 1946

Notary Public

My Commission expires March 16, 1948

Tulsa, Oklahoma Nov. 11, 1946

Name A. M. Bell, Jr.

Position General Superintendent

Representing Gulf Oil Corporation

Company or Operator

Address Tulsa, Oklahoma

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	138		Red bed
	320		Red bed and shale
	650		Red bed
	932		Red bed and sand
	1130		Red bed and shale
	1190		Red bed and Anhy
	1694		Anhy and shale
	2430		Anhy and salt
	2480		Anhy and shale
	2510		Anhy
	2580		Lime - Anhy - Shale
	2700		Anhy
	2756		Anhy and gip
	3100		Anhy
	3200		Lime and shale
	3267		Lime, Gyp and shale
	3487		Lime and Gyp
	3567		Lime
	3580		Lime and Gyp
	3665		Lime - Shale and Gyp
	4289		Lime and sand
	4340		Lime
	4391		Sand and lime
	4535		Lime
	4669		Lime and sand
	5191		Lime
	5252		Dalamite
	5404		Lime
	5475		Lime and Gyp
	5525		Lime
	5556		Lime and Gyp
	6984 (TOTAL DEPTH)		Lime