


ILLEGIBLE

SCOUT REPORT

NEW MEXICO

Wildcat Deep Test

OIL CONSERVATION COMMISSION

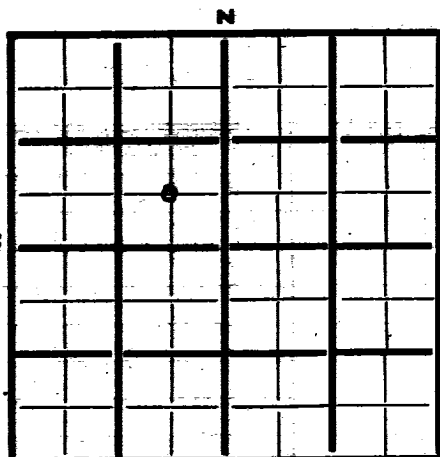

Company Gulf Oil Corporation

Farm Name Vivian

Well No. 1

Land Classification Patented

Sec. 30 Twp. 22 Range 38 County Lea

Feet from Line: 660' N. S. E. 1980' W.

Elevation 3356

Method Ret

Contractor Acme

Scout

Spudded 7-8-44 Completed 10-25-44 Initial Production

Bond Status

AMOUNT CASING AND CEMENTING RECORD

SIZE	FEET	INCHES	BOX CEMENT
<u>13 1/8</u>	<u>306</u>		<u>240</u>
<u>9 5/8</u>	<u>2553</u>		<u>1600</u>
<u>7"</u>	<u>6506</u>		<u>500</u>

ACID RECORD

Gals.
<u>1000</u>
<u>2000</u>
<u>3000</u>
Top Pay <u>3675</u> TD

TA 11605

TX 12535

BX 2410

TRS

TY

TBL

TWL

TUBING RECORD

2 1/2 6462

PACKER

SHOOTING RECORD

No. of Quarts	From	To
No. of Quarts	From	To
<u>SLG 3830 S</u>	<u>S 3927-454</u>	<u>S/</u>
<u>S 3910-155</u>	<u>S/</u>	<u>S/</u>

DATE		DATE	
<u>6-20</u>	<u>C + P</u>	<u>10-10</u>	<u>TD 6508L</u>
<u>7-8</u>	<u>RVR</u>		<u>WOC</u>
<u>7-11</u>	<u>T.D. 300 RR</u>		<u>Cancel 6450-60</u>
	<u>5th Ring</u>		<u>Rec 6' L + Det</u>
<u>7-18</u>	<u>Ø 1135 R D</u>		<u>1 1/2 hr Det time per 307</u>
<u>7-25</u>	<u>Ø 2450 A</u>		<u>4 1/2 hr L no shot</u>
<u>8-1</u>	<u>Ø 2670 A</u>		<u>Cancel 6960-70</u>
<u>8-8</u>	<u>Ø 3401 A + L</u>		<u>Rec 10'</u>
<u>8-15</u>	<u>Ø 3965 L</u>		<u>9 1/8 Laine 55/0</u>
<u>8-22</u>	<u>Ø 4460 L</u>		<u>4" Det no shot</u>
<u>8-29</u>	<u>Ø 4970 L</u>		<u>Rec Slg 6460</u>
<u>9-5</u>	<u>Ø 5415 L</u>	<u>10-17</u>	<u>T.D. 6508L</u>
<u>9-19</u>	<u>Ø 5762 L</u>		<u>7 1/2 + 1 1/2</u>
<u>9-26</u>	<u>Ø 6307 L</u>		<u>perf 100 shots</u>
<u>10-3</u>	<u>T.D. 6450 L</u>		<u>6430-6460</u>
	<u>Prep to Core</u>	<u>10-24</u>	<u>TD 6508L</u>
	<u>DST 6365 - 6450</u>		<u>Ø went to 6465</u>
	<u>again 1 1/2 hrs</u>		<u>Total</u>
	<u>Flow 35 BOPN out</u>		<u>Perf 329 shot 6375-6430</u>
	<u>for 27.5 Gpm</u>		<u>Flow 265 BOPN in</u>
			<u>Ø res + 40 min</u>

LOG

DEPTH	FORMATION	DEPTH	FORMATION	DEPTH	FORMATION
0.0	1.6 BOPH last	3 hrs	Test		
1.0	AA 2000 OIH	2 1/2 hrs			
2.0	TD 6508L				
3.0	BOBOL				
4.0	PB 6465				
5.0	IPF 782	BO 14 hrs			
6.0	thru 3/4" TC				
7.0	GOR 38.8 Cor.				
8.0	SICP 1400 #				
9.0	AT				
10.0					
11.0					
12.0					
13.0					
14.0					
15.0					
16.0					
17.0					
18.0					
19.0					
20.0					
21.0					
22.0					
23.0					
24.0					
25.0					
26.0					
27.0					
28.0					
29.0					
30.0					
31.0					
32.0					
33.0					
34.0					
35.0					
36.0					
37.0					
38.0					
39.0					
40.0					
41.0					
42.0					
43.0					
44.0					
45.0					
46.0					
47.0					
48.0					
49.0					
50.0					
51.0					
52.0					
53.0					
54.0					
55.0					
56.0					
57.0					
58.0					
59.0					
60.0					
61.0					
62.0					
63.0					
64.0					
65.0					
66.0					
67.0					
68.0					
69.0					
70.0					
71.0					
72.0					
73.0					
74.0					
75.0					
76.0					
77.0					
78.0					
79.0					
80.0					
81.0					
82.0					
83.0					
84.0					
85.0					
86.0					
87.0					
88.0					
89.0					
90.0					
91.0					
92.0					
93.0					
94.0					
95.0					
96.0					
97.0					
98.0					
99.0					
100.0					