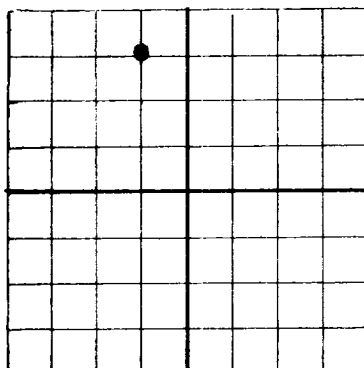


N

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES  
LOCATE WELL CORRECTLY

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE.

Gulf Oil Corporation

P. O. Box #661, Tulsa 2, Oklahoma

Company or Operator

Address

Vivian

Well No. 1 in NE NW of Sec. 30, T. 22S

Lease

R. 38E, N. M. P. M., Wildcat Field, Lea County.

Well is 660 feet south of the North line and 660 feet west of the East line of Northwest Quarter.

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Vivian H. Drinkard, Address Midland Nat'l. Bank, Midland, Texas

If Government land the permittee is, Address

The Lessee is Gulf Oil Corporation, Address Tulsa 2, Oklahoma

Drilling commenced July 8, 1944 Drilling was completed October 5, 1944

Name of drilling contractor Ashby Drilling Company, Address Grand Haven, Michigan

Elevation above sea level at top of casing 5342 feet.

The information given is to be kept confidential until 19

## OIL SANDS OR ZONES

No. 1, from 6290' to 6508' No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8	48#	8	Smls.St. 306'						
9-5/8	36#	8	"	2553'					
7"	25#	8	"	6506					

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17"	13-3/8	306'	290	Halliburton		
12 1/2"	9-5/8	2553'	1600	"	9.8	
8-3/4	7"	6506'	500	"	9.2	

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	2000	10-18-44	6430-60	
		Acid	2000	10-24-44	6275-6460	

Results of shooting or chemical treatment Before acid, produced only small amount of oil.  
After acidizing, well produced 782 Barrels oil and no water through 3/4" needle valve, wide open in 14 hours.

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 6506 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

## PRODUCTION

Put to producing October 17, 1944

The production of the first 24 hours was 1341 barrels of fluid of which 100 % was oil; % emulsion; % water; and % sediment. Gravity, Be. Corrected 8.8

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

Ashby Drilling Company, Driller, Driller  
Driller, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 17th

day of November, 1944

*W. E. Evans*  
Notary Public

My Commission expires March 16, 1948

Tulsa, Oklahoma November 17, 1944

Name *W. E. Evans*

Position Assistant General Supt.

Representing Gulf Oil Corporation

Address Company or Operator  
Tulsa 2, Oklahoma

1

NEW ARR