

APPROVED **HOBBS**

COPY TO O.C.C.

Budget Bureau No. 42-R358.4.
Approval expires 12-31-60.

Form 9-551a
(Feb. 1961)


JUN 13 1963

(SUBMIT IN TRIPLICATE)

Land Office

Lease No. **M-05093**

Unit



J. L. GORDON
ACTING DISTRICT ENGINEER
UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	X
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Federal "G"

June 5, 1963

Well No. **1-8** is located **2310** ft. from **N** line and **330** ft. from **W** line of sec. **8**

23-8 **33-2** **107N**

(1/4 Sec. and Sec. No.)

(Twp.)

(Range)

(Meridian)

Undesignated

(Field)

Los

(County or Subdivision)

New Mexico

(State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Run 311 feet of 8-5/8" OD 240 J-55 EW Lane Star ST60 casing with a Texas pattern shoe. Landed at 325'.

Cemented with 200 sacks of regular neat cement plus 2% Na 5. Cemented by Haliburton. Pumped plug down at 6:30 p.m. May 31, 1963.

Drilled plug June 1, 1963 and pressure tested with 300 psi for 30 minutes. No leaks were found. Began drilling ahead.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **John M. Frigg Company**


Address **Post Office Box 106**

Maljamar, New Mexico

By *Ken Astor*

Title **Production Clerk**

Form 9-331a
(Feb. 1961)



E. W. SPANDLEY
DISTRICT ENGINEER

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

HOBBS

Let Bureau No. 42-R358.4.
m Approved.

Land Office **New Mexico**

Lease No. **NR-05095**

Unit

RECORDED

MAY 29 1963

SUNDRY NOTICES AND REPORTS ON WELLS
GEOLOGICAL SURVEY
HOBBS, NEW MEXICO

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

May 28, 19**63**

Federal "SR" Lease

Well No. **1-8** is located **2310** ft. from **[N]** line and **330** ft. from **[W]** line of sec. **8**

Wildcat **Sec. 8** **238** **35E** **N.M.P.M.**
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)

Wildcat **Lee** **New Mexico**
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is **3370** ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

We propose to drill a Seven Rivers-Yates test with rotary to an approximate depth of 4500 feet.

8 5/8" casing will be run to an approximate depth of 4500 feet and cemented into the top of the Salt with 200 sacks.

If oil or gas in paying quantities is found, a production string of 4 1/2" or 5 1/2" casing will be run and sufficient cement used to come back into the base of the salt.


All casing run and cemented will conform to methods approved by the U. S. Geological Survey.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **John H. Trigg**

Address **P. O. Box 520**

Roswell, New Mexico

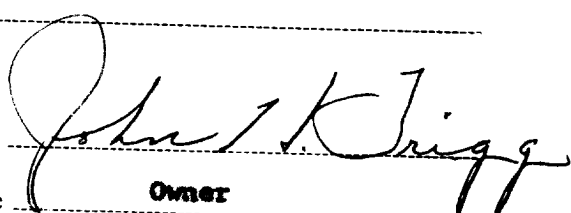By 
Title **Owner**