

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

5a. Indicate Type of Lease State <input checked="" type="checkbox"/> Fee <input type="checkbox"/>
5. State Oil & Gas Lease No. B-3480-1

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. <input checked="" type="checkbox"/> OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER-	7. Unit Agreement Name
2. Name of Operator Gulf Oil Corporation	8. Farm or Lease Name R. E. Cole (NCT-A)
3. Address of Operator Box 670, Hobbs, New Mexico 88240	9. Well No. 13
4. Location of Well UNIT LETTER 0 910 FEET FROM THE South LINE AND 2130 FEET FROM THE East LINE, SECTION 16 TOWNSHIP 22-S RANGE 37-E NMPM.	10. Field and Pool, or Wildcat South McCormack Silurian
15. Elevation (Show whether DF, RT, GR, etc.)	12. County Lee

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF:

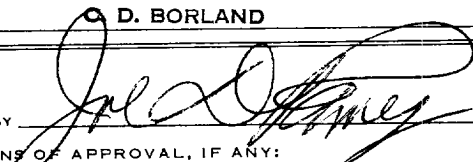
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input checked="" type="checkbox"/>	OTHER <input type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Johan Drilling Company spudded 12-1/4" surface hole at 8:00 PM, March 3, 1969. Drilled to 1160'. Ran 36 joints, 1145' of 8-5/8" OD 21# J-55 S&W casing set and cemented at 1157' with 525 sacks of Incon Class C with 4% gel & 2% Ca Cl2. Cement did not circulate. Ran 1" pipe outside 8-5/8" casing to top of cement at 75'. Cemented thru 1" with 40 sacks of Incon Class C with 4% gel and 2% Ca Cl2. Cement circulated. WOC 22 hours. Tested 8-5/8" casing with 1700#, 30 minutes. OK.

Started drilling 7-7/8" hole at 1160'.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

ORIGINAL SIGNED BY SIGNED D. BORLAND	TITLE Area Production Manager	DATE March 6, 1969
APPROVED BY 	TITLE	DATE
CONDITIONS OF APPROVAL, IF ANY:		