

UNITED STATES HOBBS, NEW MEXICO 88240

DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐  
2. NAME OF OPERATOR  
Estoril Producing Corp.  
3. ADDRESS OF OPERATOR  
11 th Floor Vaughn Bldg.  
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 660' FSL & 1830' FWL of  
AT TOP PROD. INTERVAL: Section 22  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>


(other) Progress Report of Re-entry

5. LEASE  
NM-0552659-A  
6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
7. UNIT AGREEMENT NAME  
8. FARM OR LEASE NAME  
CURRY FEDERAL  
9. WELL NO.  
2  
10. FIELD OR WILDCAT NAME  
Antelope Ridge-Morrow (Undesig. Gas)  
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Section 22T-23-S, R-34-E  
12. COUNTY OR PARISH  
Lea  
13. STATE  
New Mexico  
14. API NO.  
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
3476' GL.

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

6-2-82 RU Haliburton acid equip. Acidize perms. fr. 12,152-297' w/40,000 g. 15% Retarded Acid in 4 stages. ISDP 3780#. 15" 3780#. Avg. pp 8200#. Avg. rate 8.5 BPM. Max. press. 9300#. Min. 6400#. Total load to recover 2460 bbls. SI. RD Acid equip. SD.

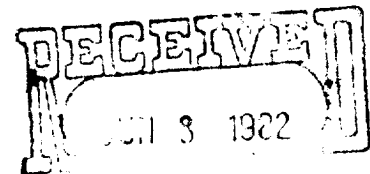

OIL & GAS  
U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO  
Set @ \_\_\_\_\_ Ft.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_

18. I hereby certify that the foregoing is true and correct

SIGNED Leigh Anne McQuill TITLE Prod. Clerk DATE 6-3-82

ACCEPTED FOR RECORD

(This space for Federal or State office use)

APPROVED BY (ORIG. SGD.) DAVID R. GLASS

CONDITIONS OF APPROVAL IF ANY: OCT 20 1982

U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO

\*See Instructions on Reverse Side

RECEIVED

OCT 22 1982

O.C.D.  
HOBBS OFFICE