


OPTIONAL EQUIPMENT

DOUBLE PREVENTER OPTION

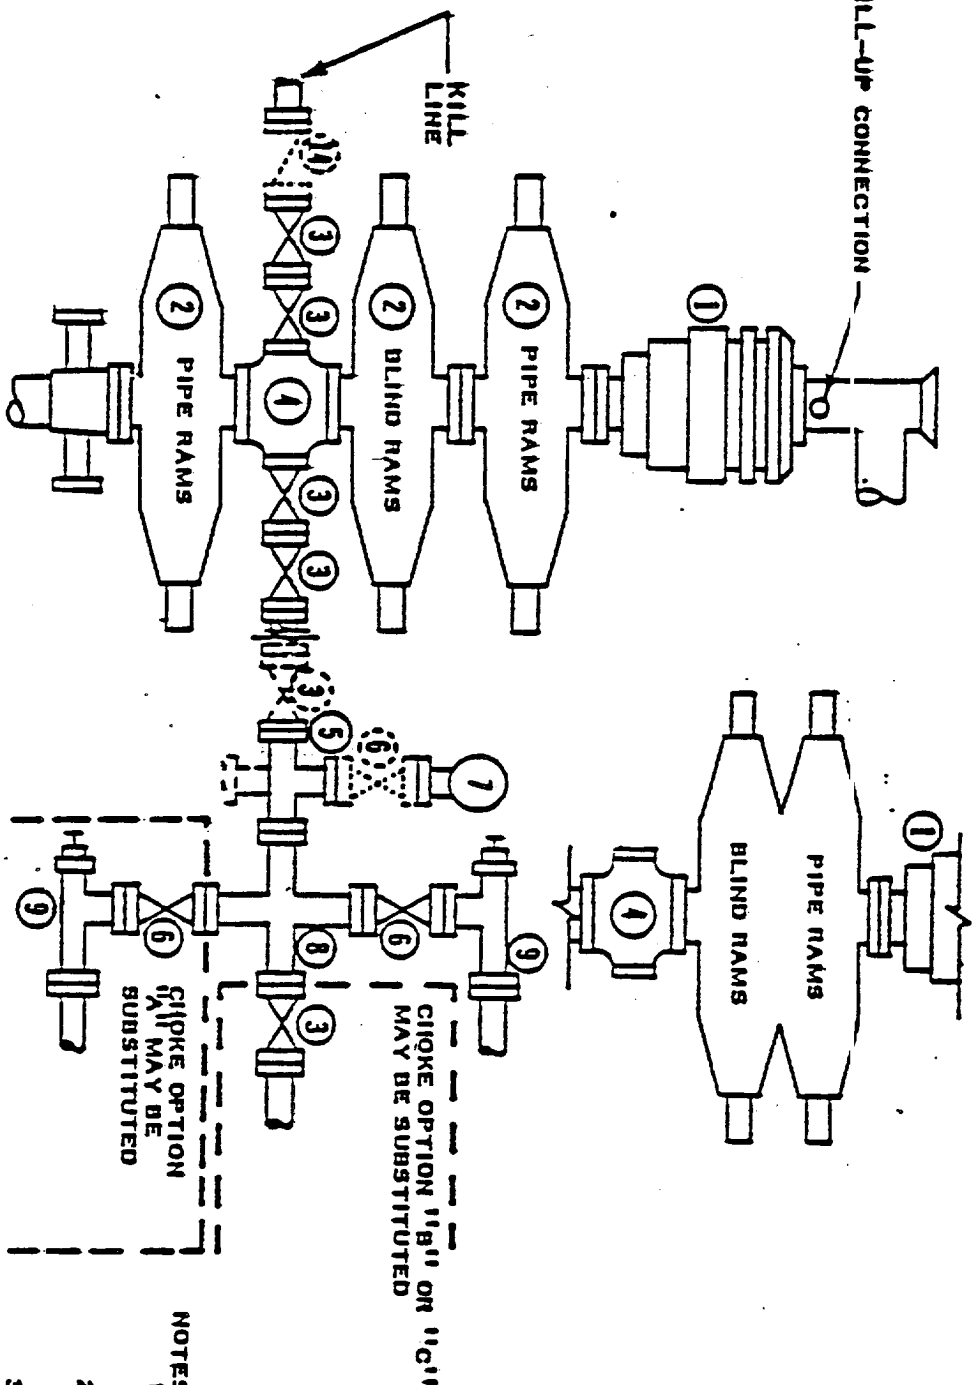

- ① SER. 1500 HYDRIL GK
- ② SER. 1500 RAM-TYPE BOP (8)
- ③ 3" SER. 1500 VALVE
- ④ SER. 1500 DRILLING SPOOL
- ⑤ 3" SER. 1500 X 2" SER. 1500 STEEL TEE
- ⑥ 2" SER. 1500 VALVE
- ⑦ 2" MUD PRESSURE GUAGE
- ⑧ 3" SER. 1500 X 2" SER. 1500 STEEL CROSS
- ⑨ 2" SER. 1500 ADJ. CHIOKE
- ⑩ 2" SER. 1500 ADJ. CHIOKE ON 2" SER. 1500 RISER VALVE ON SIDE OUTLET OF 2" SER. 1500 STEEL TEE
- ⑪ ADAPTER, 2" SER. 1500 X 10,000 LB WP FLANGE MATING ⑬ INLET
- ⑫ 10,000 LB WP REMOTE CHIOKE
- ⑬ HYDRAULIC CHIOKE, 2500 LB WP OR BETTER
- ⑭ 3" SER. 1500 CHECK VALVE

NOTES

1. 5000 PSI WP OR BETTER CLAMP NUBS MAY BE SUBSTITUTED FOR FLANGES
2. ONE ADJUSTABLE CHIOKE MAY BE REPLACED WITH A POSITIVE CHIOKE
3. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED, THE VALVES FLANGED TO THE BOP NUB MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

5000 PSI WORKING PRESSURE
BLOWOUT PREVENTER HOOK-UP
(SERIES 1500 FLANGES OR BETTER)

CHIOKE OPTION "A"

CHIOKE OPTION "B"

CHIOKE OPTION "C"

CHIOKE OPTION
"A" MAY BE
SUBSTITUTED

CHIOKE OPTION "B" OR "C"
MAY BE SUBSTITUTED