


..... OPTIONAL EQUIPMENT

DOUBLE PREVENTER OPTION

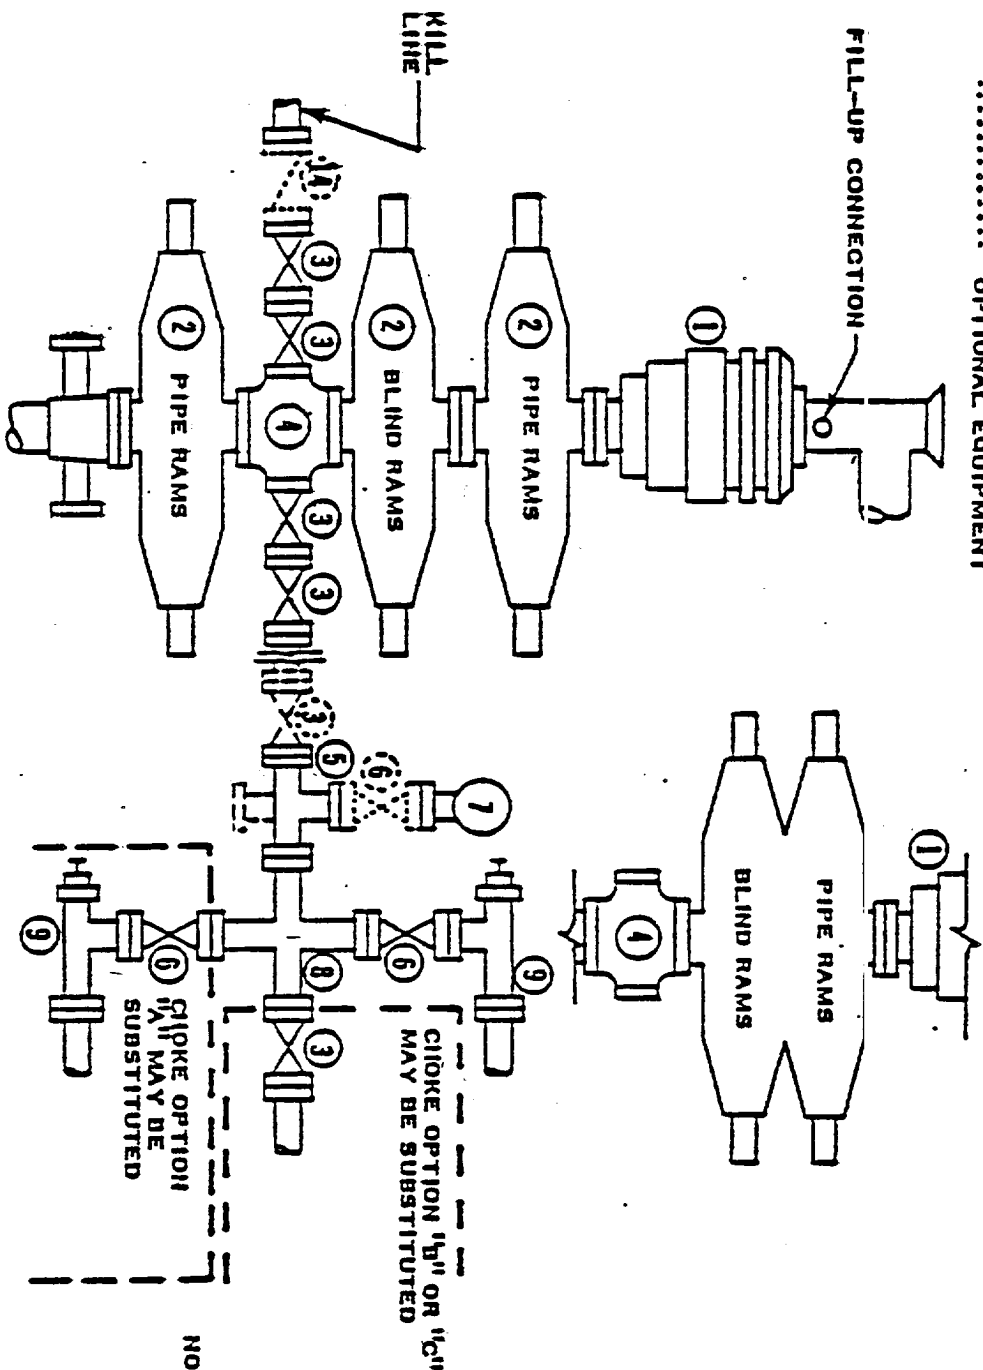

CHOKER OPTION 'b' OR 'c' MAY BE SUBSTITUTED

CHOKER OPTION 'a' MAY BE SUBSTITUTED

NOTES:

1. 10,000 PSI WP OR BETTER CLAMP HUBS MAY BE SUBSTITUTED FOR FLANGES
2. ONE ADJUSTABLE CHOKER MAY BE REPLACED WITH A POSITIVE CHOKER
3. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED, THE VALVES FLANGED TO THE BOP RUN MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

① HYDRIL GK 10,000 LB WP 6 BX (9)

② RAM-TYPE BOP, 10,000 LB WP 6 BX

③ 3 1/16" 10,000 LB WP 6 BX VALVE

④ DRILLING SPOOL, 10,000 LB WP 6 BX

⑤ STEEL TEE, 3 1/16" X 2 1/16" 10,000 LB WP 6 BX

⑥ 2 1/16" 10,000 LB WP 6 BX VALVE

⑦ MUD PRESSURE GAUGE

⑧ STEEL CROSS, 3 1/16 X 2 1/16 10,000 LB WP 6 BX

⑨ ADJ. CHOKER 2 1/16" 10,000 LB WP 6 BX

⑩ 2 1/16 ADJ. CHOKER ON 2 1/16 RISER VALVE ON SIDE OUTLET OF 2 1/16 STEEL TEE, ALL 10,000 LB WP 6 BX

⑪ ADAPTER 2 1/16 X FLANGE MATING INLET OF ⑫ 10,000 LB WP 6 BX

⑫ 10,000 LB WP REMOTE CHOKER

⑬ HYDRAULIC CHOKER, 2500 LB WP OR BETTER

⑭ CHECK VALVE, 3 1/16" 10,000 LB WP 6 BX

10,000 PSI WORKING PRESSURE
BLOWOUT PREVENTER HOOK-UP

(10,000 PSI 6 BX
FLANGES OR BETTER)

68-10397
JAN 18 1968
FBI - NEW YORK

RECEIVED
JAN 18 1968
FBI - NEW YORK