

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ gas ☐
well well other

2. NAME OF OPERATOR

ESTORIL PRODUCING CORPORATION

3. ADDRESS OF OPERATOR

11th Floor, Vaughn Bldg., Midland, TX

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 660' FSL & 1980' FWL of Sec 10
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

CHANGE ZONES ☐

ABANDON* ☐

(other) PROGRESS REPORT

5. LEASE

NM 13838

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

ALTA FEDERAL

9. WELL NO.

ONE

10. FIELD OR WILDCAT NAME

UNDESIGNATED BONES SPRINGS

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

SEC. 10, T23S, R34E

12. COUNTY OR PARISH 13. STATE

LEA NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
3389.9' GL

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

7-24-82 Unseated Pkr.. POH w/Pkr. & tbg. RU SCHLUMBERGER PERFORATORS. Ran 5-1/2" CIBP on WL. Set CIBP @ 7450'. Perf. 5-1/2" csg. w/2 SPF from 6992-7002' = 22 holes. RD SCHLUMBERGER. PU 5-1/2" pkr on 2-3/8" tbg. WIH. Set Pkr. @ 6918'.

7-25-82 RU HALIBURTON ACID EQUIP. Acidize from 6992-7002' w/2500 g. 7 1/2% HCL NEFE Acid & 36 ball sealers. BDP 2600#. Max. trtg. press. 3000#, min. 2300#, avg. rate 4.4 BPM, fair ball action. ISDP 1000#, 15" 800#. Total load 88 bbls. Open well to flow.

Subsurface Safety Valve: Manu. and Type

Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED David R. Glass TITLE PROD. CLERK DATE 7-27-82

ACCEPTED FOR RECORD

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL IF ANY

(ORIG. SGD.) DAVID R. GLASS


TITLE

DATE

OCT 15 1982

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

*See Instructions on Reverse Side

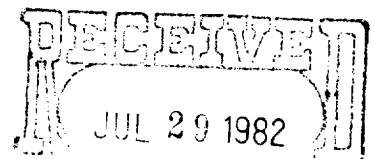

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

RECEIVED

OCT 18 1982

C.C.O.
HOBBS OFFICE