Form : 160-3 (December 1990)

I.M OIL CONS. COMMISSION ... 'E.

UNITED STATES 1980 (Other Instruction DEPARTMENT OF THE NEW MEXICO 88240) (Other instructions on Form approved. Budget Bureau No. 1004-0136 Expires: December 31, 1991

	BUREAU OF LAND MANAGEMENT				S. LEASE DESIGNATION AND SERIAL NO.			
APPL	ICATION FOR P			-DEN	NM 94616 6. IF INDIAN, ALLOTTE			
la. TYPE OF WORK		ENMIT TO D	MILL OR DEE	PEN	o. II INDIAN, ALLOTTE	M OR TRIBE NAME		
b. TYPE OF WELL		DEEPEN [-	7. UNIT AGREEMENT I	TAME		
	VELL OTHER		ZONE X	MULTIPLE	8. FARM OR LEASE HAME, WE	ELL NO.		
Meridian Oil	Inc.	,			Diamondtail '34'	Federal # 5		
3. ADDRESS AND TELEPHONE NO.					9. AM WELL NO.			
) Midland, Texas 797			-	10. FIELD AND POOL,			
At surface (R	eport location clearly and	in accordance with	any State requiremen	nts.*)	Triste Draw De			
	1980' FSL & 710' FE	L]-	11. SEC., T., R., M., OR AND SURVEY OR AI	BLK		
At proposed prod. son	ie				Sec. 34, T23S			
4. DISTANCE IN MILES	AND DIRECTION FROM NEAR	REST TOWN OR POST	OFFICE*		12. COUNTY OR PARISH			
31,83 miles nort	thwest of Jal, New N	lexico			Lea	18. STATE		
5. DISTANCE FROM PROPO LOCATION TO NEAREST PROPERTY OR LEASE I	P		16. NO. OF ACRES IN	1	ACRES ASSIGNED	<u> </u>		
(Also to nearest drig	r. unit line, if any	710'	240	10 TH	s well 40			
8. DISTANCE FROM PROP TO NEAREST WELL, D OR APPLIED FOR, ON TH	PILITING COMPILED		19. PROPOSED DEPTH	20. ROTARY	OR CABLE TOOLS			
I. ELEVATIONS (Show who			10,200'		Rotary ·			
			Carebed Control	dod Water Seem	22. APPROX. DATE WO			
3.		PROPOSED CASIN	G AND CEMENTING	PROGRAM	Upon Approv	d I		
SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOO	T SETTING DE	г рт н	QUANTITY OF CEMEN	Tr.		
17 1/2"	13 3/8"	48#	650'	850 :	sxs Cinculati			
12 1/4"	8 5/8"	28#/32#	4800 '	1550				
7 7/8"	5 1/2"	17#	10200'	1200	SXS			
C o ntact Person	ted Potash Area : Donn Successions Answired	PI PC 2003 BERNET EF AF	PER. OGRID NO POPERTY NO POOL CODE	16 751 9936 24196 5-33274				
pen directionally, give pertin	PROPOSED PROGRAM: If pent data on subsurface locations	s and measured and true	vertical depths. Give blow	tive zone and proposed ne wout preventer program, if a	w productive zone. If pro my.	oposal is to drill or		
BIGNED	ubonna Williams	TITLE	Regulatory C	Compliance	_ DATE	/95		
(This space for Federa	al or State office use)							
PERMIT NO.			_ APPROVAL DATE _					
Application approval does no	ot warrant or certify that the appli	icant holds legal or equita			d entitle the applicant to con-	durt montions #		
CONDITIONS OF APPROVAL,	IF ANY:			•	The second second	and quadris like		
APPROVED BY				* * ·	DATE			
					DATE _			

DISTRICT I P.O. Box 1980, Hobbs, NM 88240

State of New Mexico

Energy, Minerals and Natural Resources Department

Form C-102 Revised February 10, 1994

Instruction on back Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - 3 Copies

DISTRICT II P.O. Drawer DD, Artesia. NM 68210

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT


DISTRICT IV

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV PO BOX 2088, SANTA	FE, NM 875	04-2088								
			WELL LO	CATION	AND ACREA	AGE DEDICATI	ON PLAT			
	Number		1	Pool Code'			Pool Name			
<u> 50 (.)</u>	<u>533</u>	<u> </u>	\$	9931		Triste I	Draw Delaware			
Property C	Code			DIAM	Property Nan ONDTAIL FEE	perty Name Well Number NL FEDERAL "34" 5				
OGRID No).				Operator Nan			Elevatio	n .	
26485				М	ERIDIAN OIL,	, INC.		3623	3	
					Surface Loc	ation				
UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	
	34	23 S	32 E		1980	SOUTH	710	EAST	LEA	
			Bottom	Hole Loc	eation If Diffe	erent From Sur	face		L	
UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	
Dedicated Acres	Joint o	r Infill Co	nsolidation (Code Ord	der No.	<u> </u>				
40										
NO ALLO	WABLE W	OR A	SSIGNED '	TO THIS	COMPLETION (IT HAS BEEN	JNTIL ALL INTER APPROVED BY	RESTS HAVE BIFTHE DIVISION	EEN CONSOLIDA	ATED	
							I hereb	OR CERTIFICAT y certify the the in n is true and compl wledge and belief.	formation	

Signature Donna Williams Printed Name Regulatory Compliance Title 12/1/95 Date SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervisor, and that the same is true and correct to the best of my belief. Date Surveyor 5/000 SEPTEMBER 13, 1995 SJA Signature of Seal of / 9.25.95 Certificate No. JOHN WESTS PROPERTY TO THE SENTENCE OF THE SEN 3239 12641

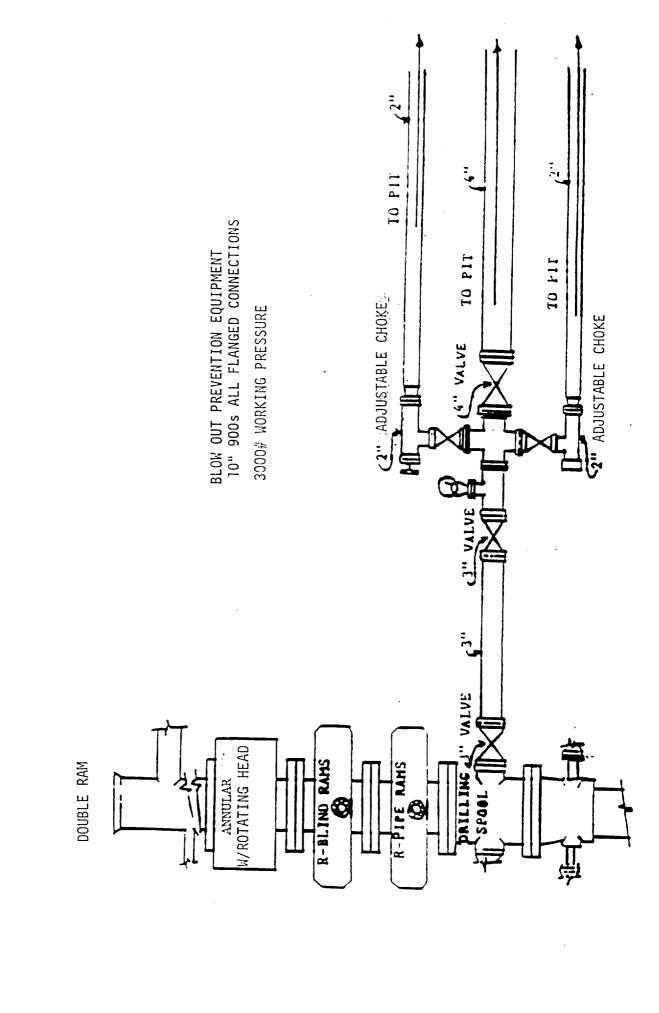

The following information is to supplement BLM form 3160-3 Application for permit to drill in accordance with Onshore Oil and Gas Order No. 1:

9 - POINT DRILLING PLAN

1. Name and estimated tops of important geologic formation/marker horizons.

<u>FORMATION</u>	<u>DEPTH</u>
Rustler	970°
Salado Delaware	1100' 4850'

2. Estimated depths at which the top and bottom of formations potentially containing usable water, oil, gas, or prospectively valuable deposits of other minerals are expected to be encountered and the operator's plans for protecting such resources.

Delaware

4850' (Oil)

- 3. The operator's minimum specifications for Blowout Preventer (BOP) and related equipment to be used and schematic diagrams thereof showing sizes, pressure ratings, and the testing procedures and testing frequency. BOP and BOP related equipment (BOPE) schematics shall include schematics of choke manifold equipment. Accumulator systems and remote controls shall be utilized.
 - 13 5/8" 1.5M psi WP BOP w/rotating head to be installed on the 13 3/8" csg. Test to 750 psi before drilling the 13 3/8" csg. shoe.
 - 11" 3M BOP stack to be installed on the 8 5/8" csg. The BOP stack will consist of one blind ram BOP, one pipe ram BOP, and a rotating head. Tested to 1500 psi before drilling the 8 5/8" casing shoe.
- 4. The proposed casing program including size, grade, weights, type of thread and coupling, and the setting depth of each string and its condition (new or acceptably reconditioned). For exploratory wells, or for wells as otherwise specified by the authorized officer, the operator shall include the minimum design factors for tensions, burst, and collapse that are incorporated into the casing design. In cases where tapered casing strings are utilized, the operator shall also include and/or setting depths of each portion.

```
17 1/2" hole, 13 3/8" H-40 48# csg set @ 650'

12 1/4" hole, 8 5/8" 28# K-55, 28#/32# csg set @ 4800' ******

7 7/8" hole, 5 1/2" 17# K-55/N-80 csg set @ 10,200'

*****SPECS: 8 5/8" K-55 BTC - ID=8.017", Drift=7.892", Burst
```

5. The amount and type(s) of cement, including anticipated additives to be used in setting each casing string, shall be described. If stage cementing techniques are to be employed, the setting depth of the stage collars and amount and type of cement, including additives, and preflush amounts to be used in each stage, shall be given. The expected linear fill-up of each cemented string, or each stage when utilizing stage-cementing techniques, shall also be given.

=3390 psi, Collapse=1800 psi, and Tension=437,000 lbs

- a. 13 3/8" csg: Cmt w/650 sxs Class 'C' + 4% gel + 2% CaCl2 + 1/4 pps flocele; tail w/200 sxs Class 'C' + 2% CaCl2 + 1/4 pps flocele.. Circ. to surface.
- b. 8 5/8" csg: Cmt (2 Stages) Stage 1: Lead w/600 sxs Class 'C' + 9 pps salt + 5 pps gilsonite + 1 pps econolite + 1/4 pps flocele, tail w/250 sxs 'C' + 2% CaCl2.

Stage 2: Lead w/500 sxs Class 'C' Lite + 9 pps salt + 1/4 pps flocele, tail w/200 sxs Class 'C' + 2 % CaCl2. Circ to surface.

- c. 5 1/2" csg: Lead w/600 sxs Class 'H' + 3% Econolite + 6 pps salt + 1/4 pps flocele, tail w/600 sxs Class 'H' 50/50 Poz + 2% gel + .6% Halad-9 + 3 pps KCL + 1/4 pps flocele. Bring TOC to +/1 4600'.
- 6. The anticipated characteristics, additives, use, and testing of drilling mud to be employed, along with the types and quantities of mud products to be maintained, shall be given. When air or gas drilling is proposed, the operator shall submit the following specific information:

Mud Program:

0-650' fresh water, gel and lime system, MW 8.6-9.0 650'-4600' Brine, MW 10.0-10.1 ppg 4600'-9900' Fresh water, MW 8.3-8.5 9900'-10,200' FW/Bentonite/Drispac, MW 8.4-8.6

7. The anticipated testing, logging, and coring procedures to be used, including drill stem testing procedures, equipment, and safety measures.

a. DST Program: None

b. Core: None

c. Mud Logging: Two-man unit 4000' to TD.

d. Logs to be run: CN-FDC/GR/CAL: TD SCP (CNL/GR to surface)

DDL/MSFL/GR: TD-SCP

The expected bottom-hole pressure and any anticipated abnormal pressures, temperatures or potential hazards that are expected to be encountered, such as lost circulation zones and hydrogen sulfide. The operator's plans for mitigating such hazards shall be discussed. Should the potential to encounter hydrogen sulfide exist, the mitigation procedures shall comply with the provisions of Onshore Oil and Gas Order No. 6.

No abnormal pressures are anticipated. Bottom hole pressures at TD expected to be 4300 psi. Bottom hole temperature 140 F. There is no anticipated Hydrogen Sulfide in this known drilling area

9. Any other facets of the proposed operation which the operator wishes for BLM to consider in reviewing the application.

Anticipated drilling time expected to be 20 days from surface to TD.

Hob is OC)

12-POINT SURFACE USE PLAN OF OPERATIONS

1. Existing Roads: A legible map (USGS topographic, county road, or other such map) labeled and showing the access route to the location, shall be used for locating the proposed well site in relation to a town, village, or other locatable point, such as a highway or county road. All access roads shall be appropriately labeled. Any plans for improvement and/or maintenance of existing roads shall be provided. All roads shall be provided or maintained in a condition the same as or better than before operations. The information provided for use and construction of roads will also be used by BLM for the required Plan of Development for a R/W application as described in Section II C of this Order No. 1.

See Exhibit "A" - topographic land surveyors plat showing existing roads and directions to well site.

2. Access Roads to be Constructed or Reconstructed: All permanent and temporary access roads to be constructed or reconstructed in connection with the drilling of the proposed well shall be appropriately identified and submitted on a map or plat. The proposed route to the proposed drill site shall be shown, including distances from the point where the access route exists established roads. All permanent and temporary access roads shall be located and designed to implement the goals of transportation planning and meet applicable standards of the appropriate SMA, and shall be consistent with the needs of the users. Final selection of the rouge location may be accepted by the SMA as early as the predrill inspection or during approval of the APD.

See Exhibit "B" plat for road to be constructed and description.

3. <u>Location of Existing Wells:</u> This information shall be submitted on a map or plat, which includes all recorded wells (water, injection, or disposal, producing, or being drilled) within a 1-mile radius of the proposed location.

See Exhibit "C" - portion of land map showing surrounding wells in area.

4. Location of existing and/or proposed production facilities: For facilities planned either on or off the well pad, a plat or diagram shall be included showing, to the extent known or anticipated, the location of all production facilities and lines to be installed if the well is successfully completed for production. If new construction is planned, the dimensions of the facility layouts are to be shown. This information for off-pad production facilities may be used by BLM for R/W application information as specified in Section II C of Order No. 1.

Production will go from this well to existing battery located at well no. 1



Location of Types of Water Supply: Information concerning water supply, such as rivers, creeks, springs, lakes, ponds, and wells, may be shown by quarter-quarter section on a map or plat, or may be described in writing. The source and transportation method for all water to be used in drilling the proposed well shall be noted if the source is located on Federal or Indian Lands or if water is to be used from a Federal or Indian project. If the water is obtained from other than Federal or Indian lands, the location and transportation method shall be identified. Any access roads crossing Federal or Indian lands that are needed to haul the water shall be described as provided in paragraphs (1) and (2) of this Section. If a water supply well is to be drilled on the lease, the APD shall so state. The authorized officer of BLM may require the filing of a separate APD of a water well.

No available surface or sub-surface fresh water exists in the vicinity of the proposed well. Drilling water will be transported or pumped to the drill site from the nearest commercial source.

6. <u>Construction Materials:</u> The operator shall state the character and intended use of all construction material, such as sand, gravel, stone, and soil material. If the materials to be used are Federally owned, the proposed source shall be shown either on a quarter-quarter section on a map or plat, or in a written description.

Will try to use Caliche from reserve pit. If unable to use Caliche from reserve pit, then will get Caliche from a Federal or State approved caliche pit.

- 7. <u>Methods of Handling Waste Disposal:</u> A written description of the methods and locations proposed for safe containment and disposal of each type of waste material (e.g. cuttings, garbage, salts, chemicals, sewage, etc.) that results from the drilling and completion of the proposed well shall be provided.
 - Drill cuttings disposed into drilling pits.
 - Drill fluids allowed to evaporate in drill pits until pits dry.
 - Produced water during testing drill pits.
 - Produced oil during testing storage tank until sold.
 - Current laws and regulations pertaining to disposal of human waste will be observed.
 - Reserve pit will be plastic lined.
 - Waste paper, garbage, and junk will be disposed of into a special container on location and removed regularly to an approved landfill site. All waste material will be covered with a screen or lid and contained to prevent scattering by wind.
 - All trash and debris will be removed from well site within 30 days after drilling and/or completion operations are finished.

8. Ancillary Facilities: All ancillary facilities such as camps and airstrips shall be identified on a map or plat. Information as to location, land area required, and methods to be used in construction shall also be provided.

Information unavailable at this time.

9. Well Site Layout: A plat of suitable scale (not less than 1 inch = 50 feet) showing the proposed drill pad, reserve pit location, access road entry points, and its approximate location with respect to topographic features, along with cross section diagrams of the drill pad and the reserve pit showing all cuts and fills and the relation to topography. The plat shall also include the approximate proposed location and orientation of the drilling rig, dikes and ditches to be constructed, and topsoil and/or spoil material stockpiles.

See Exhibit "D"

- 10. Plans for Reclamation of the Surface: A proposed interim plan for reclamation stabilization of the site and also final reclamation plan shall be provided. The interim portion of the plan shall cover areas of the drillpad not needed for production. The final portion of the plan shall cover final abandonment of the well. The plan shall include, as appropriate, configuration of the reshaped topography, drainage systems, segregation of spoil materials, surface manipulations, redistribution of topsoil, soil treatments, revegetation, and any other practices necessary to reclaim all disturbed areas, including any access roads and pipelines. An estimate of the time for commencement and completion of reclamation operations, including consideration of weather conditions and other local uses of the area, shall be provided.
 - After completion of drilling and/or completion of operations, all equipment and other
 material not needed for operations will be removed. Pits will be filled and locations
 cleaned of trash and junk to leave well in as aesthetically pleasing a condition as
 possible.
 - Any unguarded pits containing fluids will be fenced until filled.
 - After abandonment of well, surface restoration will be in accordance with the Bureau of Land Management Surface Requirements.
- 11. <u>Surface Ownership:</u> The surface ownership (Federal, Indian, State or private) and administration (BLM, FS, BIA, Department of Defense, etc.) at the well location, and of all lands crossed by roads which are to be constructed or upgraded, shall be indicated. Where the surface of the proposed well site is privately owned, the operator shall provide the name, address and telephone number of the surface owner.

Bureau of Land Management P.O. Box 1778 Carlsbad, New Mexico 88221-1778

12. Other Information: Type of bond. The operator shall be covered by a bond in its own name as principal, or by a bond in the name of the lessee or sublessee.

Meridian Oil Inc. is covered by statewide bond.

Operator's Representatives:

Field representatives (Responsible for compliance with approved surface use operations plan.)

Meridian Oil Inc. P.O. Box 837 Hobbs, NM 88240 Office: 505-393-5844

Mr. Ed Jackson, Drilling Foreman Loco Hills, NM

Home: 505-677-2323 Mobil: 505-365-7206

Mr. Frank Raybon, Drilling Foreman

Eunice, NM

Home: 505-394-2449 Mobile: 505-369-5367

Tim Friesenhahn, Drilling Engr.

P.O. Box 51810

Midland, TX 79710-1810 Office: 915-688-6824

Home: 915-699-2154

Hal Lee, Drilling Superintendent P.O. Box 51810.

Midland, TX 79710-1810 Office: 915-688-6834


Home: 915-685-6073

OPERATORS CERTIFICATION

I hereby certify that I, <u>Tim Friesenhahn</u>, <u>Drilling Engineer</u>, under my direct supervision, have inspected the proposed drill site and access route that I am familiar with the conditions that currently exist; that the statements made in the APD package are, to the best of my knowledge, true and correct, and that the work associated with operations proposed herein will be performed by **not yet determined** contractors and subcontractors in conformity with this APD package and the terms and conditions under which it is approved. I also certify responsibility for the operations conducted on that portion of the leased lands associated with this application, with bond coverage being provided under BLM **statewide** bond. This statement is subject to the provisions of 18 U.S.C. 1001 for the filling of a false statement.

DATE:	11/13/95
NAME AND TITLE:	Tim Friesenhahn, Drilling Engineer
SIGNATURE:	Di Fill

VICINITY MAP

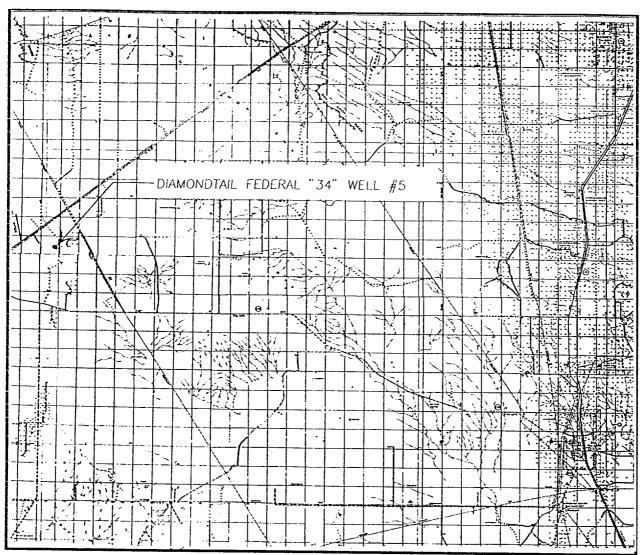



DIRECTIONS:


FROM THE INTERSECTION OF NEW MEXICO HWY. 18 & NEW MEXICO HYW. 128 IN JAL, NEW MEXICO, GO WEST ON N.M. 128 TO MILE MARKER #27, TURN RIGHT ON CALICHE ROAD AND GO NORTHWEST 5 MILES, TURN LEFT ON LEASE ROAD THEN GO SOUTHWEST 0.7 MILES TO "T" INTERSECTION, TURN LEFT AND GO SOUTH 0.2 MILES TO "Y" INTERSECTION, TURN RIGHT AND GO 0.1 MILES TO TO PROPOSED ROAD, TURN LEFT AND GO 0.1 MILES TO THE LOCATION.

SEC. 34 TW	P. <u>23-S_</u> RGE. <u>32-E</u>
SURVEY	N.M.P.M.
COUNTY	LEA
DESCRIPTION_1	980' FSL & 710' FEL
ELEVATION	3623
OPERATOR	MERIDIAN OIL, INC.
LEASE DIAMO	NDTAIL FEDERAL "34"

PAVED	HIGHWAY
LEASE	ROAD

JOHN WEST ENGINEERING HOBBS, NEW MEXICO (505) 393-3117

LOCATION VERIFICATION MAP

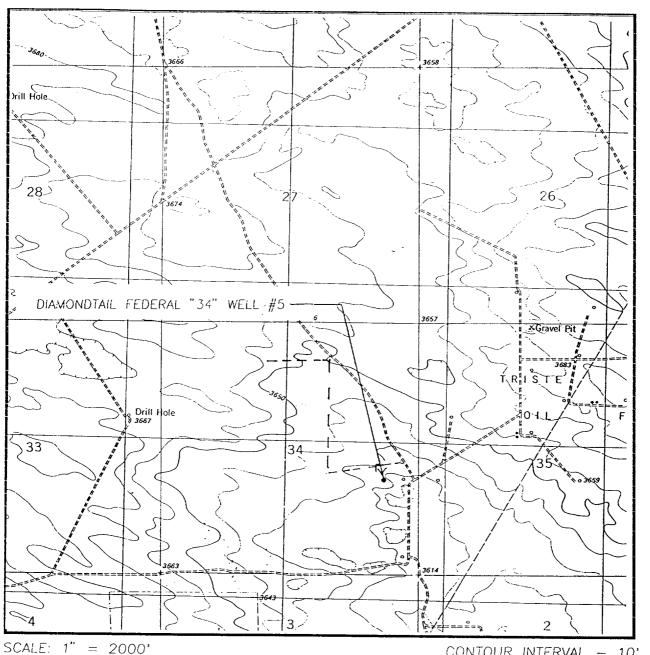

CONTOUR INTERVAL - 10'

EXISTING LEASE ROAD

PROPOSED NEW ROAD

SEC. 34 TWP. 23-S RGE. 32-E
SURVEYN.M.P.M.
COUNTYLEA
DESCRIPTION 1980' FSL & 710' FEL
ELEVATION 3623
OPERATOR MERIDIAN OIL, INC.
LEASE DIAMONDTAIL FEDERAL "34"
U.S.G.S. 10POGRAPHIC MAP
BOOTLEG RIDGE, N.M.

JOHN WEST ENGINEERING HOBBS, NEW MEXICO (505) 393-3117



SECTION 34, TOWNSHIP 23 SOUTH, RANGE 32 EAST, N.M.P.M. LEA COUNTY, NEW MEXICO.

36 ¹ 6 ¹	3621.	36 ⁰ 0.	360 ²⁶ .	3875 T.
\$600. S	367 ^{&} .	36 ² , 6	\$6 ⁷ 1.	562
56. A	35 ² 2.6	DIAMONDTAIL FEDERAL "34"	36 ²⁰	750°C
3623.0	3625.5	36 ²³ .5	38 ^{27, 7}	26°
36 ² 0.3	56 ³	3 ⁶	361 ² .	36.7°




100 0 100 200 FEET

MERIDIAN OIL ,INC.

400' X 400' GRID AND TOPO 1980' FSL & 710' FEL, SECTION 34, TOWNSHIP 23 SOUTH, RANGE 32 EAST, N.M.P.M. LEA COUNTY, NEW MEXICO.

Survey Date: 8-30-1995	Sheet 1	of	1	Sheets
W.O. Number: 95-13-1302	Drawn By:	SJA		
Date: 9-20-95 95111302 DISI	K: S.IA #14	Scale	. 1"	= 100'

JOHN W. WEST ENGINEERING COMPANY CONSULTING ENGINEERS & SURVEYORS - HOBBS, NEW MEXICO

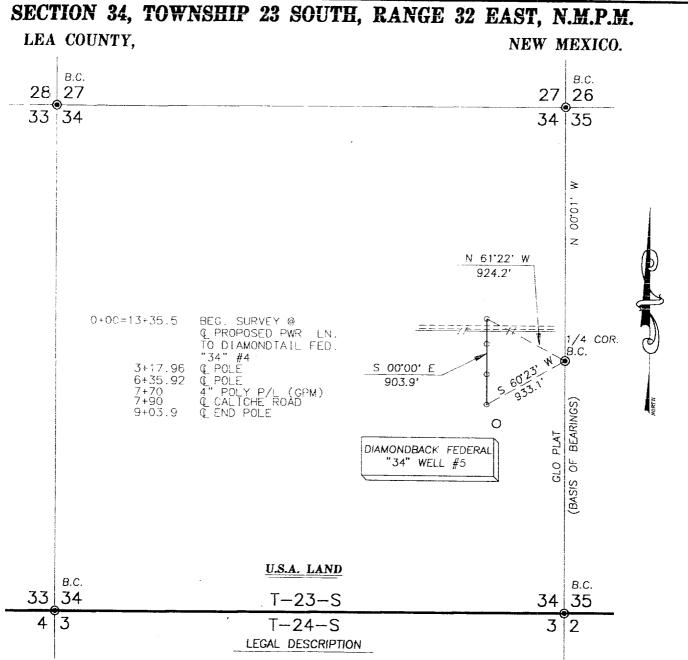

A STRIP OF LAND 50.0 FEET WIDE, 903.9 FEET OR 0.171 MILES IN LENGTH AND BEING 25 FEET LEFT AND RIGHT OF THE ABOVE PLATTED CENTERLINE OF SURVEY.

I HEREBY CERTIFY THAT THIS PLAT WAS PREPARED FROM FIELD NOTES OF AN ACTUAL SURVEY AND MEETS OR EXCEEDS ALL REQUIREMENTS FOR LAND SURVEYS ASSEPTIMED BY THIS STATE

SURVEYS ASSOCIATION BY THIS STATE.

JOHNS W. WEST NO. 676

RONALD J. EIDSON P.S. No. 1138

RONALD J. EIDSON P.S. No. 3239

GARY G. EUMHANN P.S. No. 12641

TEXAS P.L.S. No. 4735


JOHN W. WEST ENGINEERING COMPANY CONSULTING ENGINEERS & SURVEYORS - HOBBS, NEW MEXICO

1000 0 1000 2000 FEET

MERIDIAN OIL ,INC.

SURVEY FOR AN ELECTIC LINE CROSSING
U.S.A. LAND IN
SECTION 34, TOWNSHIP 23 SOUTH, RANGE 32 EAST, N.M.P.M.
LEA COUNTY, NEW MEXICO.

Survey Date: 8-	30-1995		Sheet	9	of	1	(Sheets
W.O. Number: 95-11-1302			Drawn	Ву:	SJA			
Date: 9-20-95	95111302	DISI	K: SJA	#14	Scale	: 1"	==	1000'

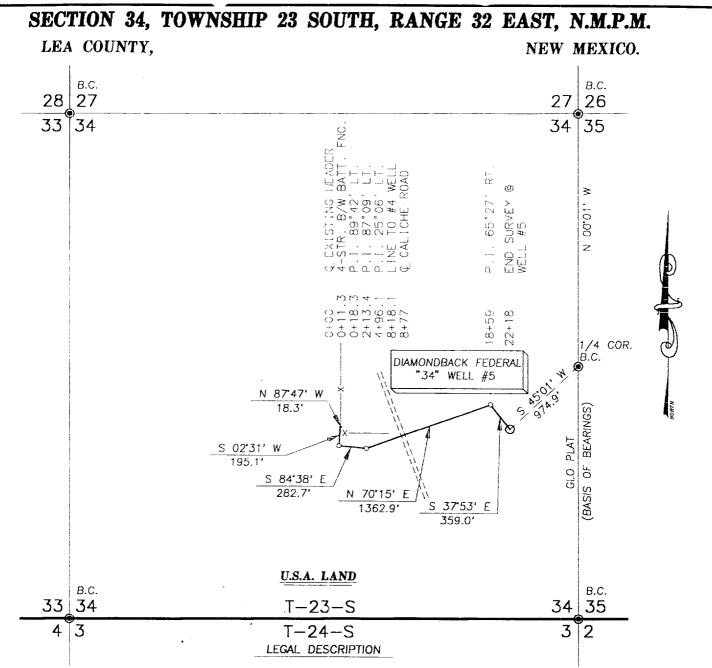

A STRIP OF LAND 50.0 FEET WIDE, 2218.0 FEET OR 0.420 MILES IN LENGTH AND BEING 25 FEET LEFT AND RIGHT OF THE ABOVE PLATTED CENTERLINE OF SURVEY.

HEREBY CERTIFY THAT THIS PLAT WAS PREPARED FROM FIELD NOTES OF AN ACTUAL SURVEY AND MEETS OR EXCEEDS ALL REQUIREMENTS FOR LAND SURVEYS ASSESSMENT BY THIS STATE.

JOHNSW MEST NOTE P.S. No. 676

RONAL PRICE EIDSON PLAN P.S. No. 3239

GARY G. EVINARIA M.M. P.S. No. 12641

TEXAS P.L.S. No. 4735

JOHN W. WEST ENGINEERING COMPANY CONSULTING ENGINEERS & SURVEYORS - HOBBS, NEW MEXICO



MERIDIAN OIL ,INC.


SURVEY FOR A 3" FLOWLINE CROSSING U.S.A. LAND IN TION 34, TOWNSHIP 23 SOUTH, RANGE 32 EAST, N.M.

SECTION 34, TOWNSHIP 23 SOUTH, RANGE 32 EAST, N.M.P.M. LEA COUNTY, NEW MEXICO.

Survey Date: 9-	131995		Sheet	1	of	1	(Sheets
W.O. Number: 95	-1 1- 1 302		Drawn	Ву:	SJA			
Date: 9 - 20 - 95	95111302	DIS	K: SJA	#14	Scale	: 1"		1000'

MERIDIAN OIL

MIDLAND REGION DRILL WELL LOCATION SPECIFICATIONS

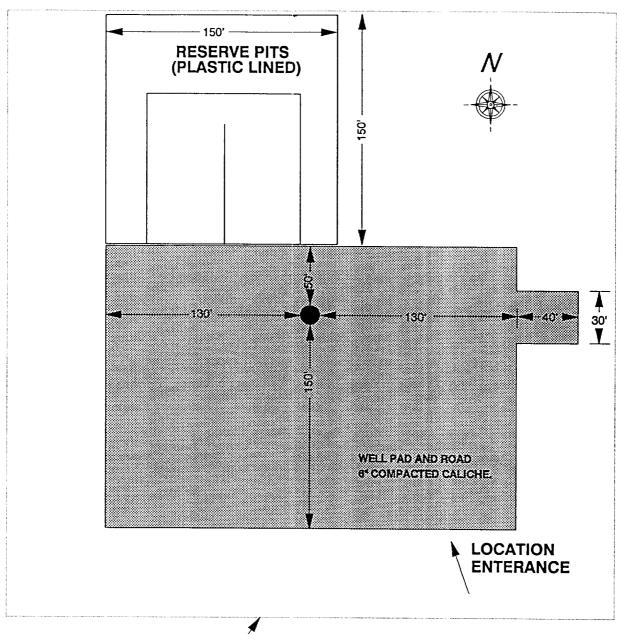

₹400' x 400' WELL SITE

SII 010.87