

RECEIVED
JUL 31 2000
BLM
ROSWELL, NM

2000 JUL 31 252

DISTRICT I
P.O. Box 1980, Hobbs, NM 88241-1980

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised February 10, 1994
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

DISTRICT II
P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
P.O. BOX 2088, SANTA FE, N.M. 87504-2088

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-025-35210	Pool Code 53800	Pool Name SAND DUNES-BONE SPRING
Property Code 25923 74855	Property Name TOMCAT 17 FEDERAL	Well Number 8
OGRID No. 166111	Operator Name CONCHO RESOURCES, INC.	Elevation 3619

Surface Location

UL or lot No. L	Section 17	Township 23 S	Range 32 E	Lot Idn	Feet from the 1980	North/South line SOUTH	Feet from the 660	East/West line WEST	County LEA
---------------------------	----------------------	-------------------------	----------------------	---------	------------------------------	----------------------------------	-----------------------------	-------------------------------	----------------------

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
---------------	---------	----------	-------	---------	---------------	------------------	---------------	----------------	--------

Dedicated Acres 40	Joint or Infill	Consolidation Code	Order No.
------------------------------	-----------------	--------------------	-----------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION




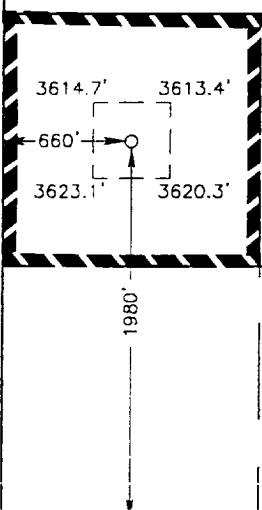
	OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.  Signature Joe T. Janica Printed Name Agent Title 07/28/00 Date	
	SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. JULY 11, 2000 Date Surveyed Signature & Seal of Professional Surveyor  600-11-0845 Certificate No. RONALD J. EIDSON 3239 GARY EIDSON 12641 MACON McDONALD 12155	

EXHIBIT "A"

VICINITY MAP

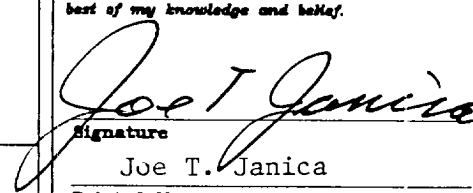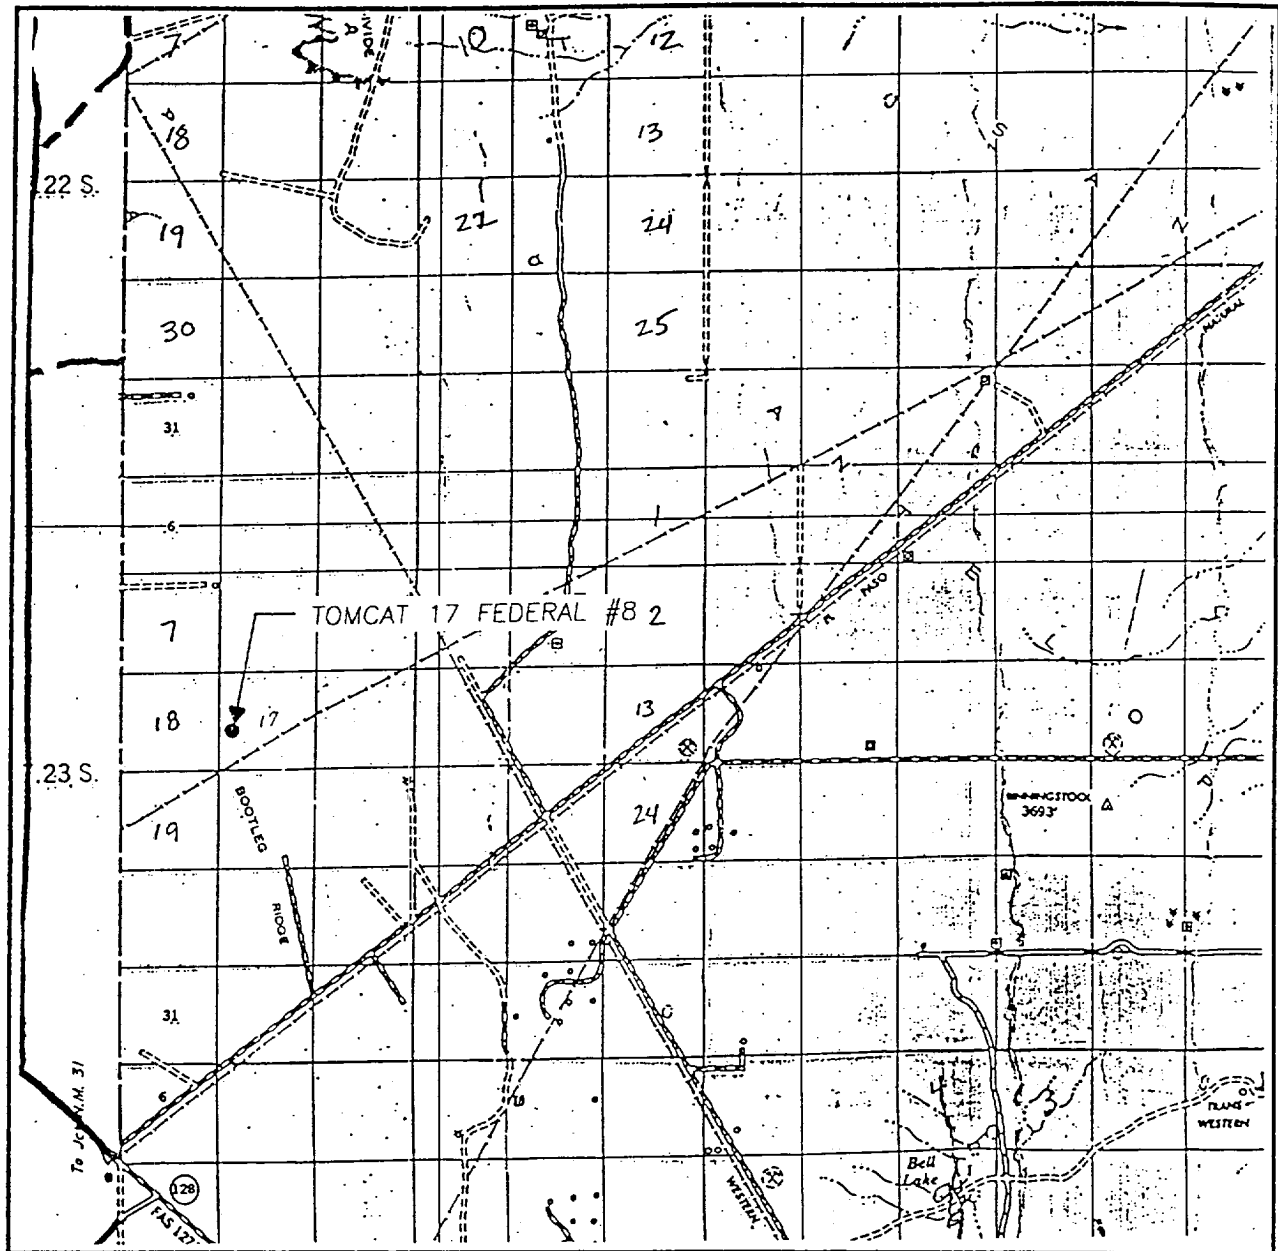

SCALE: 1" = 2 MILES

SEC. 17 TWP. 23-S RGE. 32-E

SURVEY N.M.P.M.

COUNTY LEA

DESCRIPTION 1980' FSL & 660' FWL


ELEVATION 3619

OPERATOR CONCHO RESOURCES, INC.

LEASE TOMCAT 17 FEDERAL

JOHN WEST SURVEYING
HOBBS, NEW MEXICO
(505 393-3117)

LOCATION VERIFICATION MAP

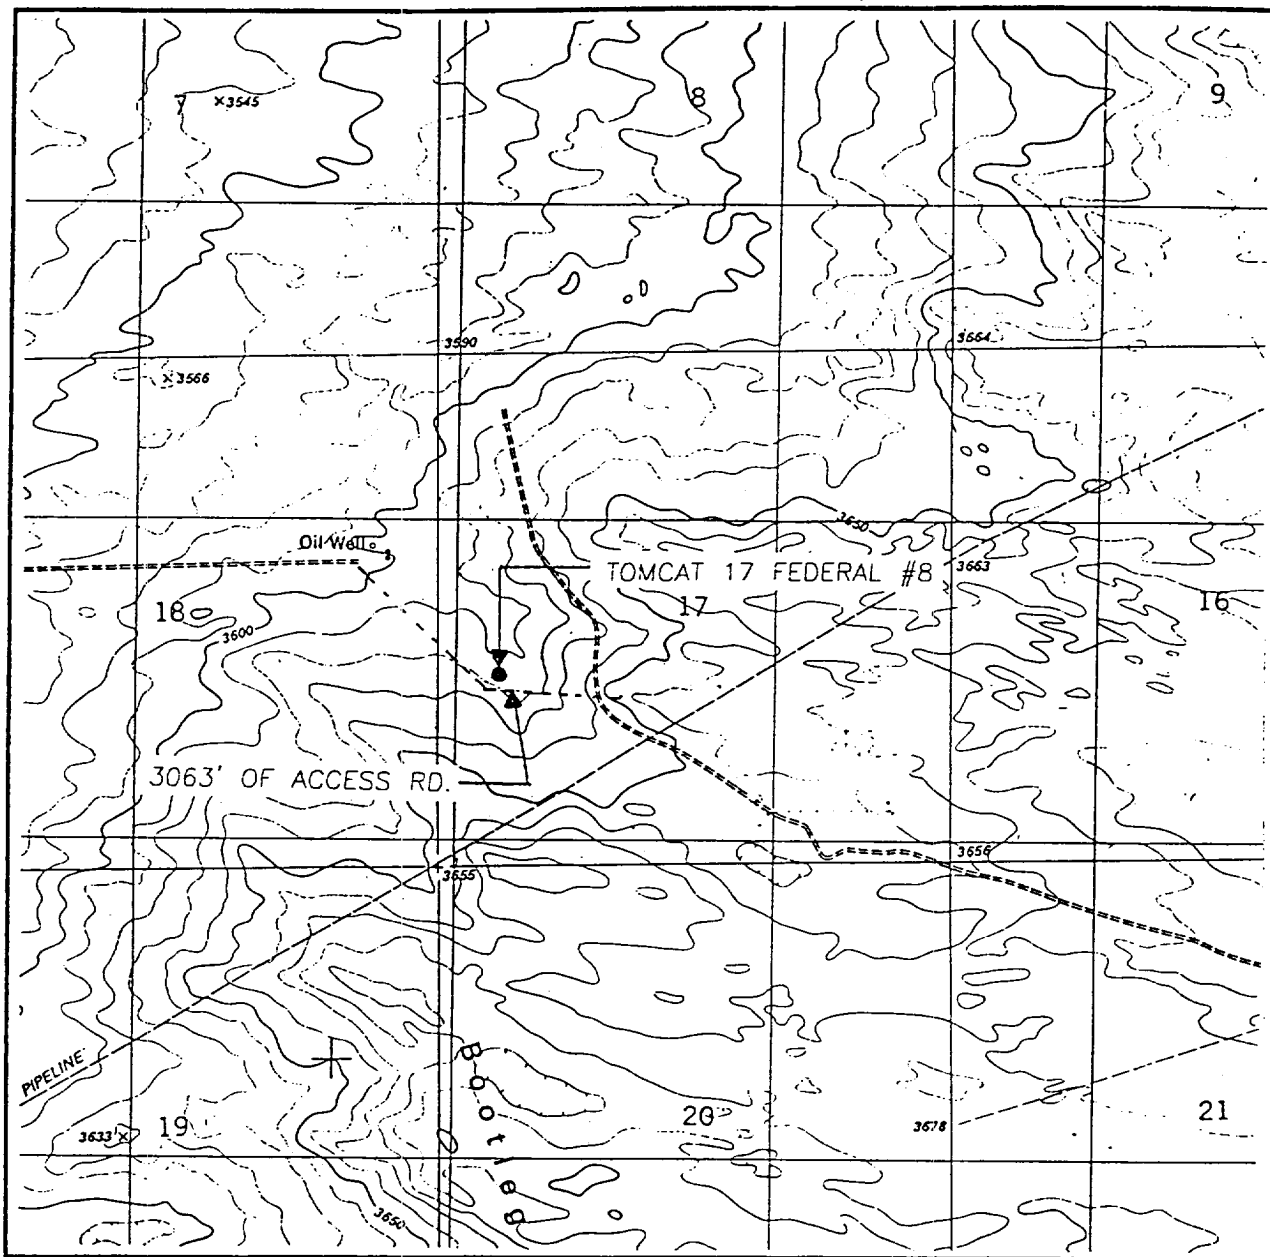

SCALE: 1" = 2000'

CONTOUR INTERVAL:
BOOTLEG RIDGE - 10'

SEC. 17 TWP. 23-S RGE. 32-E

SURVEY N.M.P.M.

COUNTY LEA

DESCRIPTION 1980' FSL & 660' FWL

ELEVATION 3619

OPERATOR CONCHO RESOURCES, INC.

LEASE TOMCAT 17 FEDERAL

U.S.G.S. TOPOGRAPHIC MAP

BOOTLEG RIDGE, N.M.

JOHN WEST SURVEYING
HOBBS, NEW MEXICO
(505 393-3117)

APPLICATION TO DRILL

CONCHO RESOURCES, INC.
TOMCAT "17" FEDERAL # 8
UNIT "L" SECTION 17
T23S-R32E LEA CO. NM

In response to questions asked under Section II of Bulletin NTL-6 the following information on the above well is provided for your consideration.

1. Location: 1980' FSL & 660' FWL SEC. 17 T23S-R32E LEA CO NM
2. Elevation above Sea Level: 3619' GR.
3. Geologic name of surface formation: Quaternary Aeolian Deposits.
4. Drilling tools and associated equipment: Conventional rotary drilling rig using drilling mud as a circulating medium for solids removal from hole.
5. Proposed drilling depth: 9100'
6. Estimated tops of geological markers:

Lamar	4820'	Brushy Canyon	7359'
Bell Canyon	4850'	Bone Spring	8650'
Manzanita	5900'		
7. Possible mineral bearing formations:

Delaware	Oil
Bone Spring	Oil
8. Casing program:

Hole size	Interval	OD of casing	Weight	Thread	Collar	Grade
25"	0-40	20"	NA	NA	NA	Conductor
17½"	0-650'	13 3/8"	48	8-R	ST&C	H-40
11"	0-4900'	8 5/8"	32#	8-R	LT&C	K-55 S-80
7 8/7"	0-9100'	5½"	15.5# 17#	8-R	LT&C	K-55

APPLICATION TO DRILL

CONCHO RESOURCES, INC.
TOMCAT "17" FEDERAL # 8
UNIT "L" SECTION 17
T23S-R32E LEA CO. NM

9. CEMENTING & SETTING DEPTH:

20"	Conductor	Drill 25" hole to 40'. Set 40' of 20" conductor Cement to surface with Redi-mix.
13 3/8"	Surface	Drill 17 1/2" hole to 650'. Run and set 650' of 13 3/8" 48# H-40 ST&C casing. Cement with 550 Sx. of Class "C" Premium cement + additives circulate Cement to surface.
8 5/8"	Intermediate	Drill 11" hole to 4900'. Run and set 4900' of 8 5/8" K-55 & S-80 32# LT&C casing. Cement with 1400 Sx. of Premium Plus Class "C" cement + additives circulate cement or at least 200' above 13 3/8 CS.
5 1/2"	Production	Drill 7 7/8" hole to 9100'. Run and set 9100' of 5 1/2" K-55 17 & 15.5# LT&C casing. Cement with 550 Sx. of Class "H" cement + additives estimated top of cement 7600'.

10. PRESSURE CONTROL EQUIPMENT: Exhibit "E". A Series 900 3000 PSI working pressure B.O.P. consting of a double ram type preventor with a bag type annular preventor. The B.O.P. unit will be hydraulically operated. Exhibit "E-1". Choke manifold and closing unit. The B.O.P. will be nipples up on 13 3/8" casing and will be operated at least once each 24 hour period while drilling and blind rams will be operated when out of hole on trips. Full opening stabbing valve and upper kelly cock will be utilized. No abnormal pressure or temperature is expected while drilling.

11. PROPOSED MUD CIRCULATING SYSTEM:

Depth	Mud Wt.	Visc.	Fluid Loss	Type Mud System
40-650'	8.6-9	32-34	N/C	Fresh water system use paper to control seepage
650-4900'	10-10.1	29-34	N/C	Brine water use lime for pH control and paper to control seepage.
4900-8900'	8.4-8.5	28-34	N/C	Fresh water use Gel & paper to control seepage and clean hole.
8900-9100'	8.5-9.0	32-34	10-15 cc or less	Feresh water with Gel/Pac Clean hole with high viscosity sweeps.

Sufficient mud materials will be kept on location at all times in order to combat lost circulation, or unexpected kicks. In order to run DST's, open hole logs, and casing the viscosity and/or water loss may have to be adjusted to meet these needs.

APPLICATION TO DRILL

CONCHO RESOURCES, INC.
TOMCAT "17" FEDERAL # 8
UNIT "L" SECTION 17
T23S-R32E LEA CO. NM

12. Testing, Logging and Coring Program:
- A. Open hole logs will be run. Dual Induction , Density, compensated Neutron, Gamma Ray, Caliper. from TD to 4900'. Neutron Gamma Ray from 4900' to surface.
 - B. Two man mud logging unit will be on hole from 4700' to TD.
 - C. Side wall cores may be taken at the request of Geologist.
13. Potential Hazards:
- No abnormal pressures or temperatures are expected. Hydrogen Sulfide gas may be encountered, H₂S detectors will be in place to detect any presence. No lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation of equipment being used. Estimated BHP 4500 PSI, estimated BHT 170° .
14. Anticipated Starting Date and Duration of Operation:
- Road and location construction will begin after BLM approval of APD. Anticipated spud date as soon as approved. Drilling expected to take 30 days. If production casing is run an additional 30 days will be required to complete and construct surface facilities.
15. Other Facets of Operations:
- After running casing, cased hole gamma ray neutron collar logs will be run from total depth over possible pay intervals. The Bone Spring pay will be perforated and stimulated. The well will be swab tested and potentialized as an Oil well.

HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. All Company and Contract personnel admitted on location must be trained by a qualified H₂S safety instructor to the following:
 - A. Characteristics of H₂S
 - B. Physical effects and hazards
 - C. Proper use of safety equipment and life support systems.
 - D. Principle and operation of H₂S detectors, warning system and briefing areas.
 - E. Evacuation procedure, routes and first aid.
 - F. Proper use of 30 minute pressure demand air pack.
2. H₂S Detection and Alarm Systems
 - A. H₂S detectors and audio alarm system to be located at bell nipple, end of bloopie line (mud pit) and on derrick floor or doghouse.
3. Windsock and/or wind streamers
 - A. Windsock at mudpit area should be high enough to be visible.
 - B. Windsock at briefing area should be high enough to be visible.
 - C. There should be a windsock at entrance to location.
4. Condition Flags and Signs
 - A. Warning sign on access road to location.
 - B. Flags to be displayed on sign at entrance to location. Green flag, normal safe condition. Yellow flag indicates potential pressure and danger. Red flag, danger, H₂S present in dangerous concentration. Only emergency personnel admitted to location.
5. Well control equipment
 - A. See exhibit "E"
6. Communication
 - A. While working under masks chalkboards will be used for communication.
 - B. Hand signals will be used where chalk board is inappropriate.
 - C. Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephoned will be available at most drilling foreman's trailer or living quarters.
7. Drillstem Testing
 - A. Exhausts will be watered.
 - B. Flare line will be equipped with an electric ignitor or a propane pilot light in case gas reaches the surface.
 - C. If location is near any dwelling a closed D.S.T. will be performed.

HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

8. Drilling contractor supervisor will be required to be familiar with the effects H_2S has on tubular goods and other mechanical equipment.
9. If H_2S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H_2S scavengers if necessary.

SURFACE USE PLAN

CONCHO RESOURCES, INC.
TOMCAT "17" FEDERAL # 8
UNIT "L" SECTION 17
T23S-R32E LEA CO. NM

1. EXISTING ROADS: Area maps, Exhibit "B" is a reproduction of a County General Highway Map. Exhibit "C" is a reproduction of a USGS Topographic Map, showing existing roads and proposed roads. All existing roads will be maintained in a condition equal to or better than current conditions. Any new roads will be constructed to BLM specifications.
 - A. Exhibit "A" shows the proposed well site as staked.
 - B. From Jal New Mexico take State Hi-way 128 West for 33 miles to Co. Road # 798 (Red Road), turn North go 3.6 miles turn East on lease road go 2 miles turn Southeast go .6 miles to location.
 - C. Lay pipeline (flow line) East from well to well # 6 to connect to flow line going to central tank battery. see Exhibit "F".
2. PLANNED ACCESS ROADS: Approximately 3050' of new road will be constructed.
 - A. The access road will be crowned and dirched to a 12'00" wide travel surface with a 40' right-of-way.
 - B. Gradient on all roads will be less than 5.00%.
 - C. No turnouts will be necessary.
 - D. If needed, road will be surfaced with a minimum of 4" of caliche. This material will be obtained from a local source.
 - E. Centerline for the new access road has been flagged. Earthwork will be as required by field conditions.
 - F. Culverts in the access road will not be used. The road will be constructed to utilize low water crossings for drainage as required by the Topography.
3. LOCATION OF EXISTING WELLS IN A ONE-MILE RADIUS EXHIBIT "A-1"
 - A. Water wells - One approximately 2 miles Southeast.
 - B. Disposal wells - None known
 - C. Drilling wells - None Known
 - D. Producing wells - As shown on Exhibit "A-1"
 - E. Abandoned wells - As shown on Exhibit "A-1"

SURFACE USE PLAN

CONCHO RESOURCES, INC.
TOMCAT "17" FEDERAL # 8
UNIT "L" SECTION 17
T23S-R32E LEA CO. NM

4. If this well is completed as a producer Concho Resources, Inc. will furnish maps and/or plats showing on site facilities and if necessary off site facilities. Exhibit "F" shows existing roads known pipelines & powerlines. Pipelines and powerlines necessary to produce this well will be laid and constructed along these roads and R-O-W's.

5. LOCATION AND TYPE OF WATER SUPPLY:

Water will be purchased locally from a commercial source and trucked over the access roads or piped in flexible lines laid on top of the ground.

6. SOURCE OF CONSTRUCTION MATERIAL:

If possible construction will be obtained from the excavation of drill site, if additional material is needed it will be purchased from a local source and transported over the access route as shown on Exhibit "C".

7. METHODS OF HANDLING WASTE MATERIAL:

- A. Drill cuttings will be disposed of in the reserve pit.
- B. All trash, junk and other waste material will be contained in trash cages or bins to prevent scattering. When the job is completed all contents will be removed and disposed of in a approved sanitary land fill.
- C. Salts remaining after completion of well will be picked up by supplier including broken sacks.
- D. Sewage from living quarters will drain into holes with a minium depth of 10'. These holes will be covered during drilling and will be back filled upon completion. A Porta-John will be provided for the rig crews. This equipment will be properly maintained during the drilling operations and removed upon completion of the well.
- E. Remaining drilling fluids will be allowed to evaporate in the reserve pit until the pit is dry enough for breaking out. In the event that drilling fluids do not evaporate in a reasonable time they will be hauled off by transports and be disposed of at a state approved disposal facility. Later pits will be broken out to speed drying. Water produced during testing will be put in reserve pits. Any oil or condensate produced will be stored in test tanks until sold and hauled from the site.

8. ANCILLARY FACILITIES:

- A. No camps or airstrips to be constructed.

SURFACE USE PLAN

CONCHO RESOURCES, INC.
TOMCAT "17" FEDERAL # 8
UNIT "L" SECTION 17
T23S-R32E LEA CO. NM

9. WELL SITE LAYOUT:

- A. Exhibit "D" shows the proposed well site layout.
- B. This exhibit indicated proposed location of reserve and sump pits and living facilities.
- C. Mud pits in the active circulating system will be steel pits & the reserve pit is proposed to be unlined unless subsurface condition encountered during pit construction indicate that lining is needed for lateral containment of fluids.
- D. If needed, the reserve pit is to be lined with polyethelene. The pit liner will be 6 mils thick. Pit liner will extend a minimum of 2'00" over the reserve pits dikes where the liner will be anchored down.
- E. The reserve pit will be fenced on three sides with four strands of barbed wire during drilling and completion phases. The fourth side will be fenced after all drilling operations have ceased. If the well is a producer, the reserve pit fence will be torn down. The reserve pit and those areas of the location not essential to production facilities will be reclaimed and seeded per BLM requirements.

10. PLANS FOR RESTORATION OF SURFACE:

Rehabilitation of the location and reserve pit will start in a timely manner after all drilling operations cease. The type of reclamation will depend on whether the well is a producer or a dry hole.

However, in either event, the reserve pit will be allowed to dry properly, and fluid removed and disposed of in accordance with Article 7.B as previously noted. The pit area will then be leveled and contoured to conform to the original and surrounding area. Drainage systems, if any, will be reshaped to the original configuration with provisions made to alleviate erosion. These may need to be modified in certain circumstances to prevent inundation of the location's pad and surface facilities. After the area has been shaped and contoured, topsoil from the spoil pile will be placed over the disturbed area to the extent possible. Revegetation procedures will comply with BLM standards.

If the well is a dry hole, the pad and road area will be contoured to match the existing terrain. Topsoil will be spread to the extent possible. Revegetation will comply with BLM standards.

Should the well be a producer, the previously noted procedures will apply to those areas which are not required for production facilities.

SURFACE USE PLAN

CONCHO RESOURCES, INC.
TOMCAT "17" FEDERAL # 8
UNIT "L" SECTION 17
T23S-R32E LEA CO. NM

11. OTHER INFORMATION:

- A. Topography consists of sand dunes with a slight dip to the West. Deep sandy soil supports Mesquite, Shinnery Oak, Sage Brush, Thin Leaf Yucca, and other native grasses.
- B. The surface is owned by The U.S. Department of Interior, administered by The Bureau of Reclamation & The Bureau Of Land Management. Use of the land is limited livestock grazing & production of oil & gas.
- C. An archaeological survey will be conducted and filed with the Bureau of Land Management Carlsbad Field Office.
- D. There are no dwellings within one mile of location.

12. OPERATORS REPRESENTATIVE:

Before construction:

TIERRA EXPLORATION INC.
P.O. BOX 2188
HOBBS, NEW MEXICO 88241
OFFICE PHONE 505-392-2112
JOE T. JANICA

During and after construction:

CONCHO RESOURCES, INC..
110 WEST LOUISIANA SUITE 410
MIDLAND, TEXAS 79702
OFFICE PHONE 915-683-7443
JIM BLOUNT

13. CERTIFICATION: - I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Concho Resources, Inc., it's contractors/subcontractors is in the conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provision of U.S.C. 1001 for the filing of a false statement.

NAME

:

Joe T Janica

DATE


:

07/28/00

TITLE

:

Agent

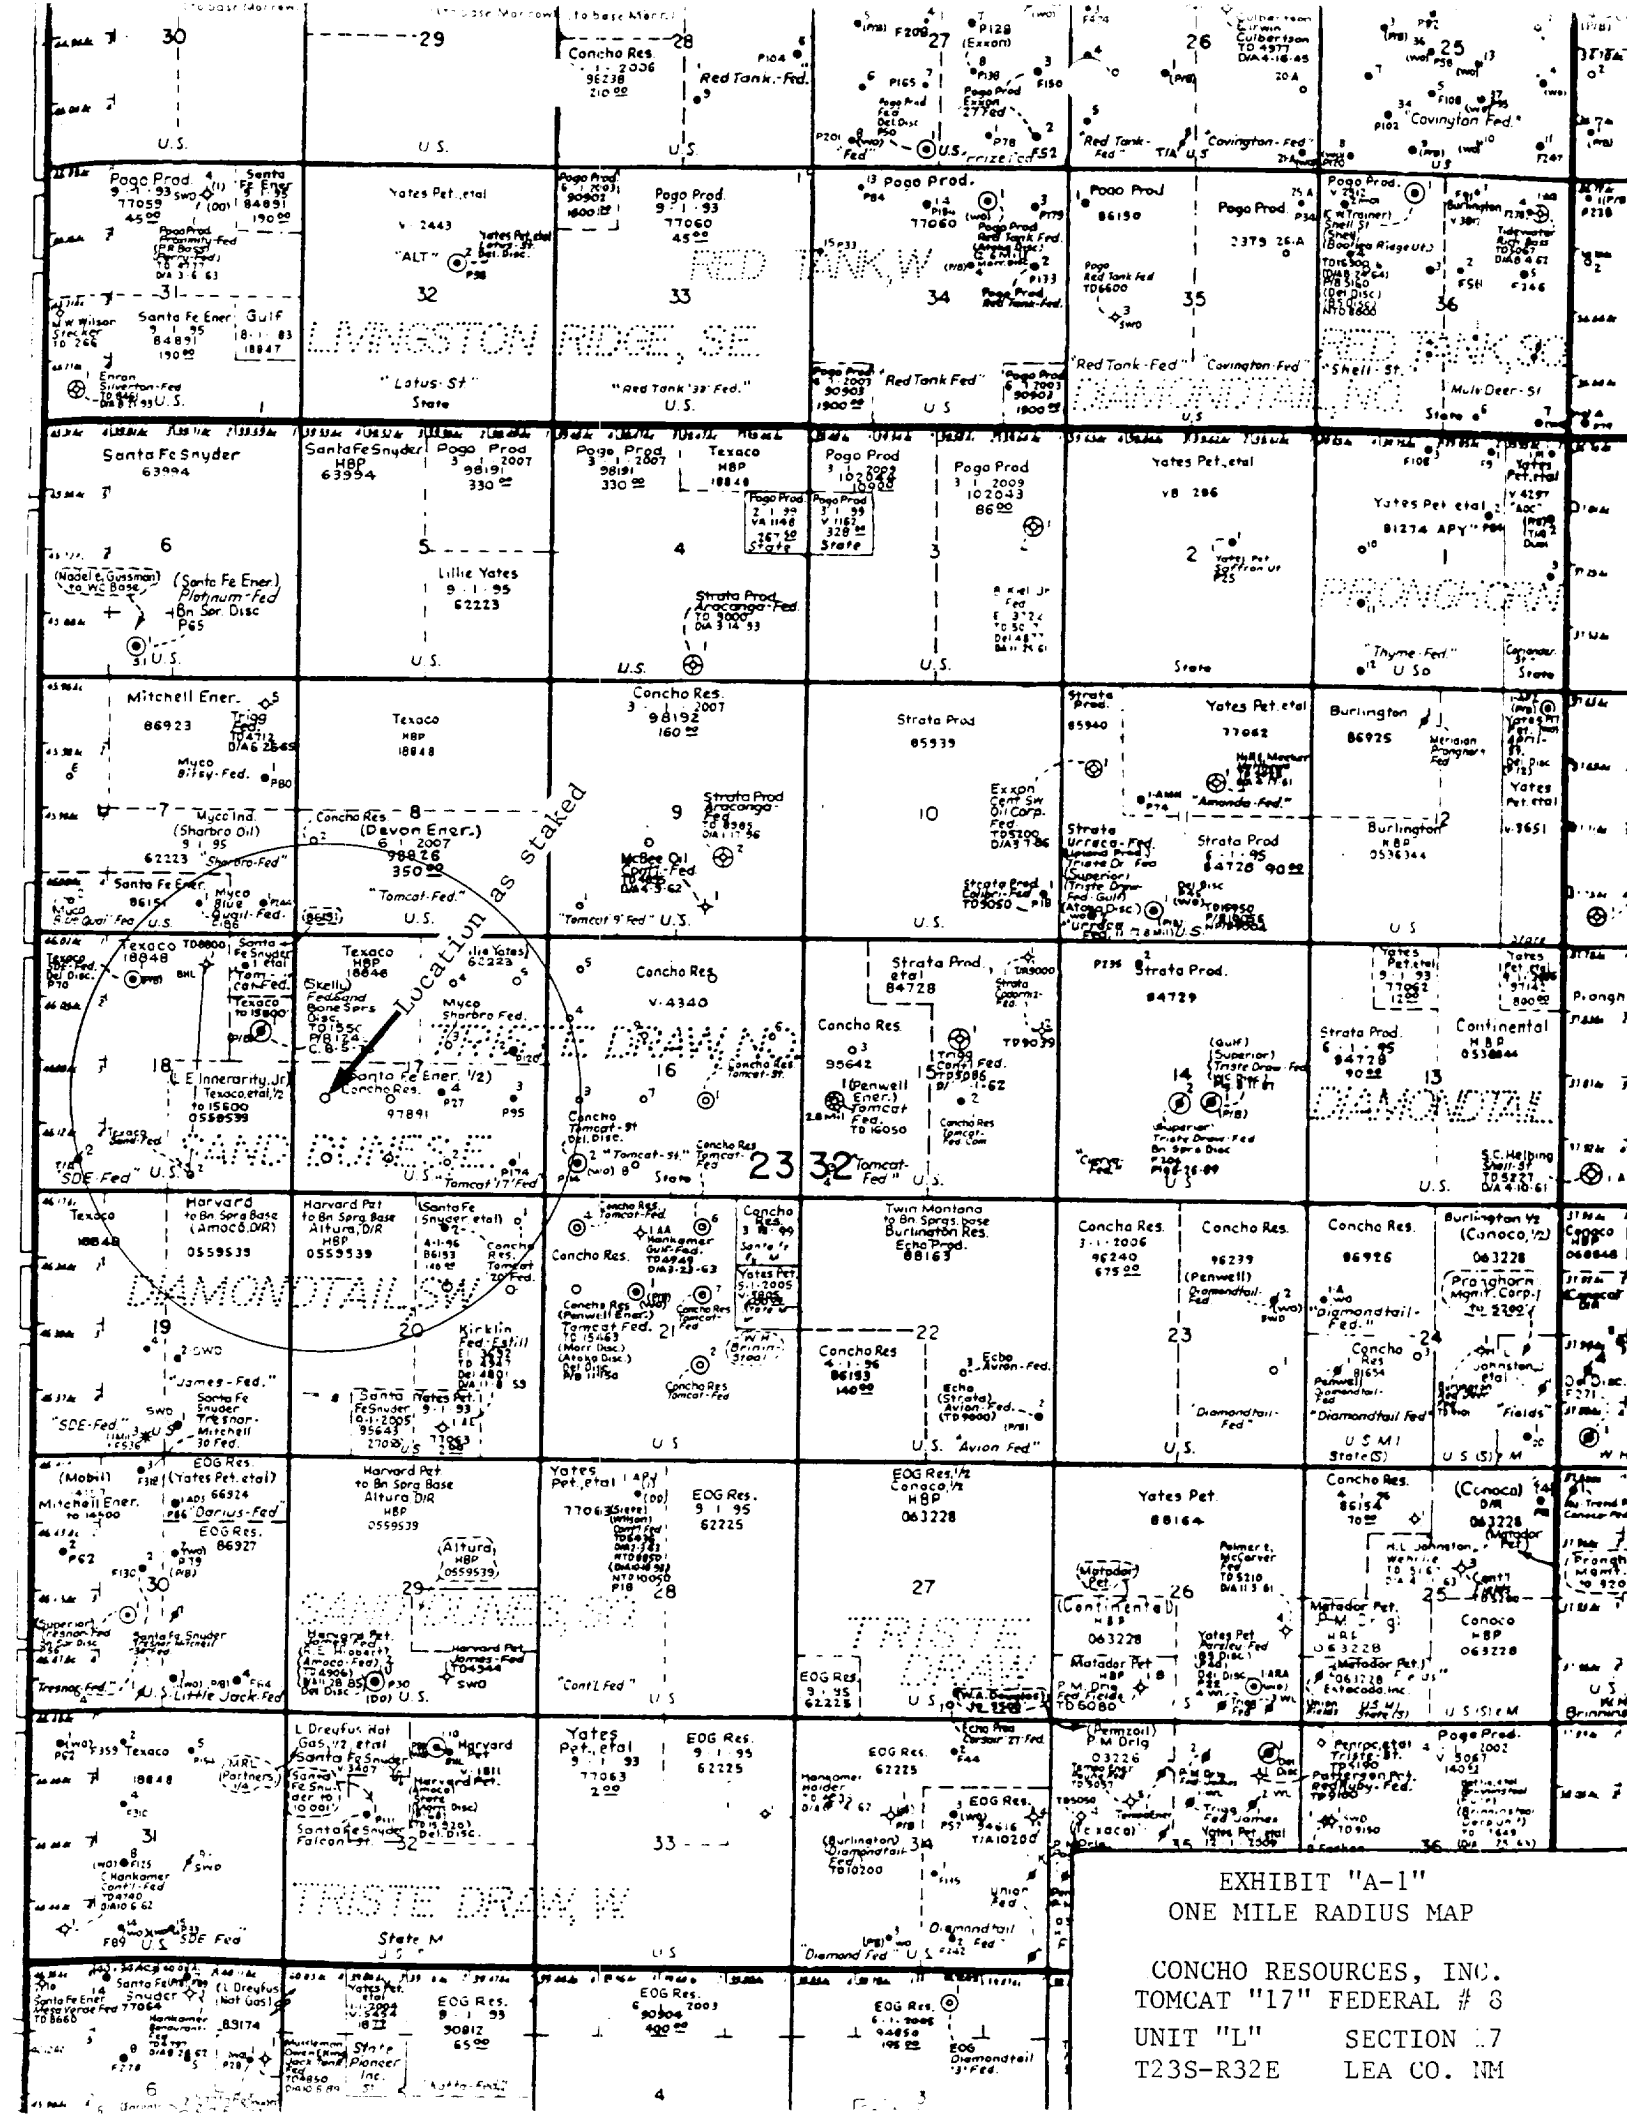


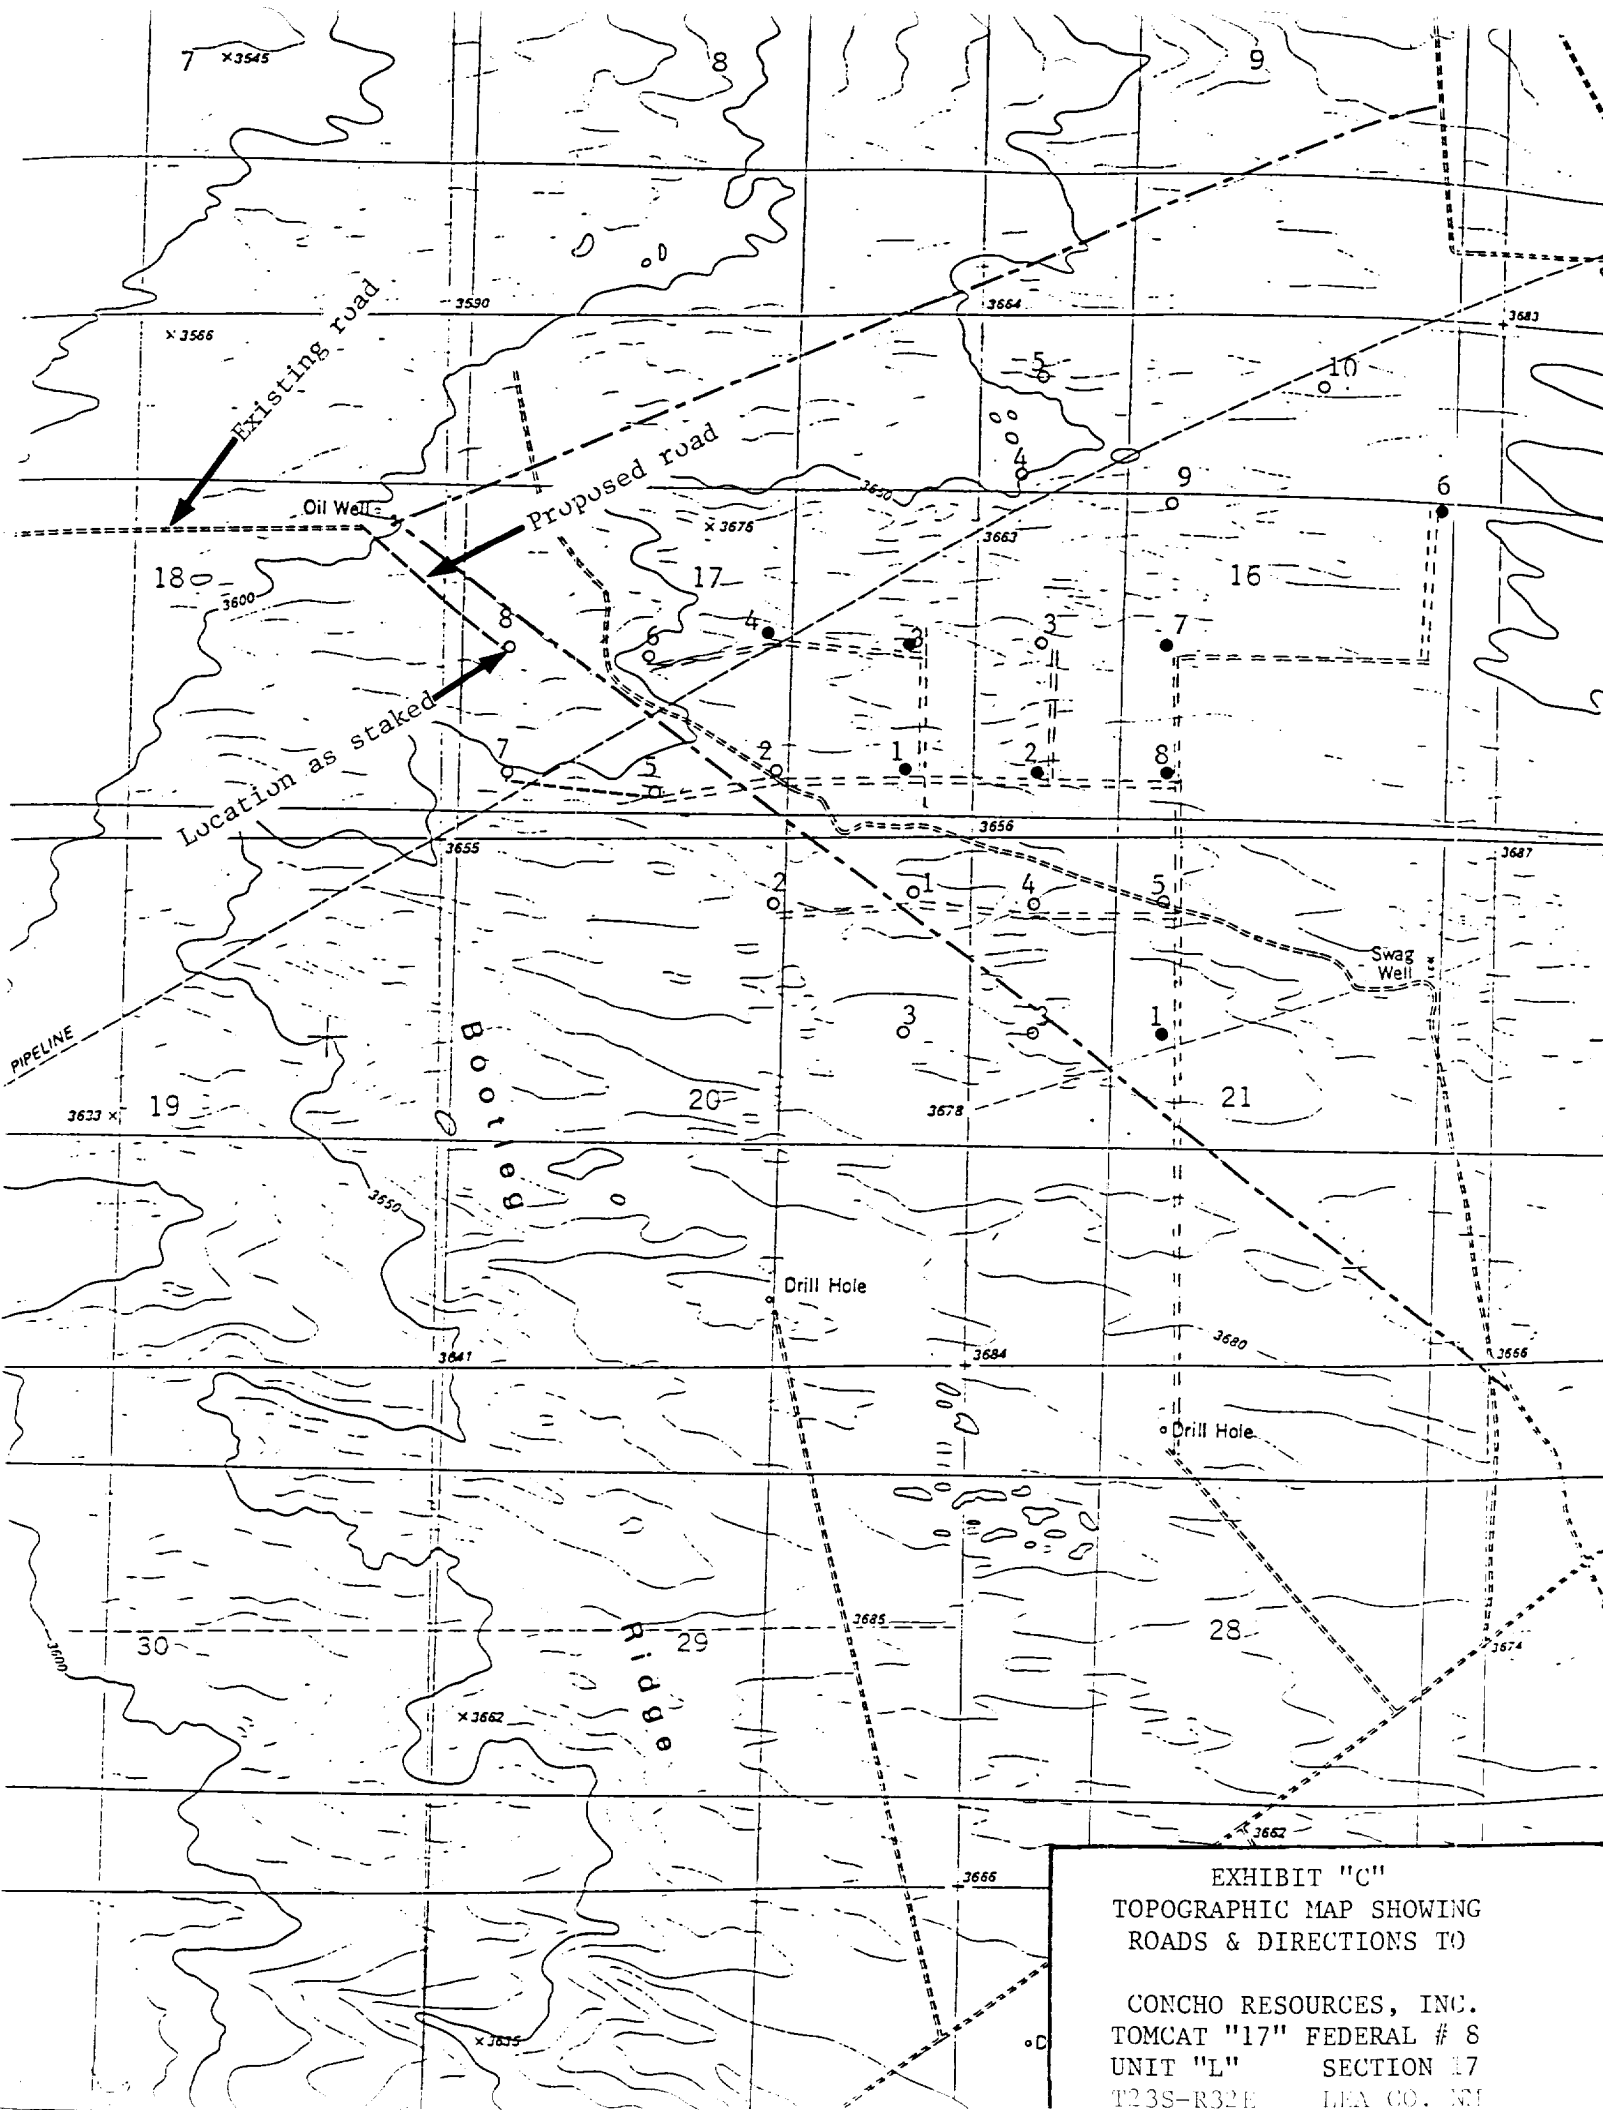


EXHIBIT "C"
TOPOGRAPHIC MAP SHOWING
ROADS & DIRECTIONS TO


CONCHO RESOURCES, INC.
TOMCAT "17" FEDERAL # 8
UNIT "L" SECTION 17
T23S-R32E LEA CO. NM

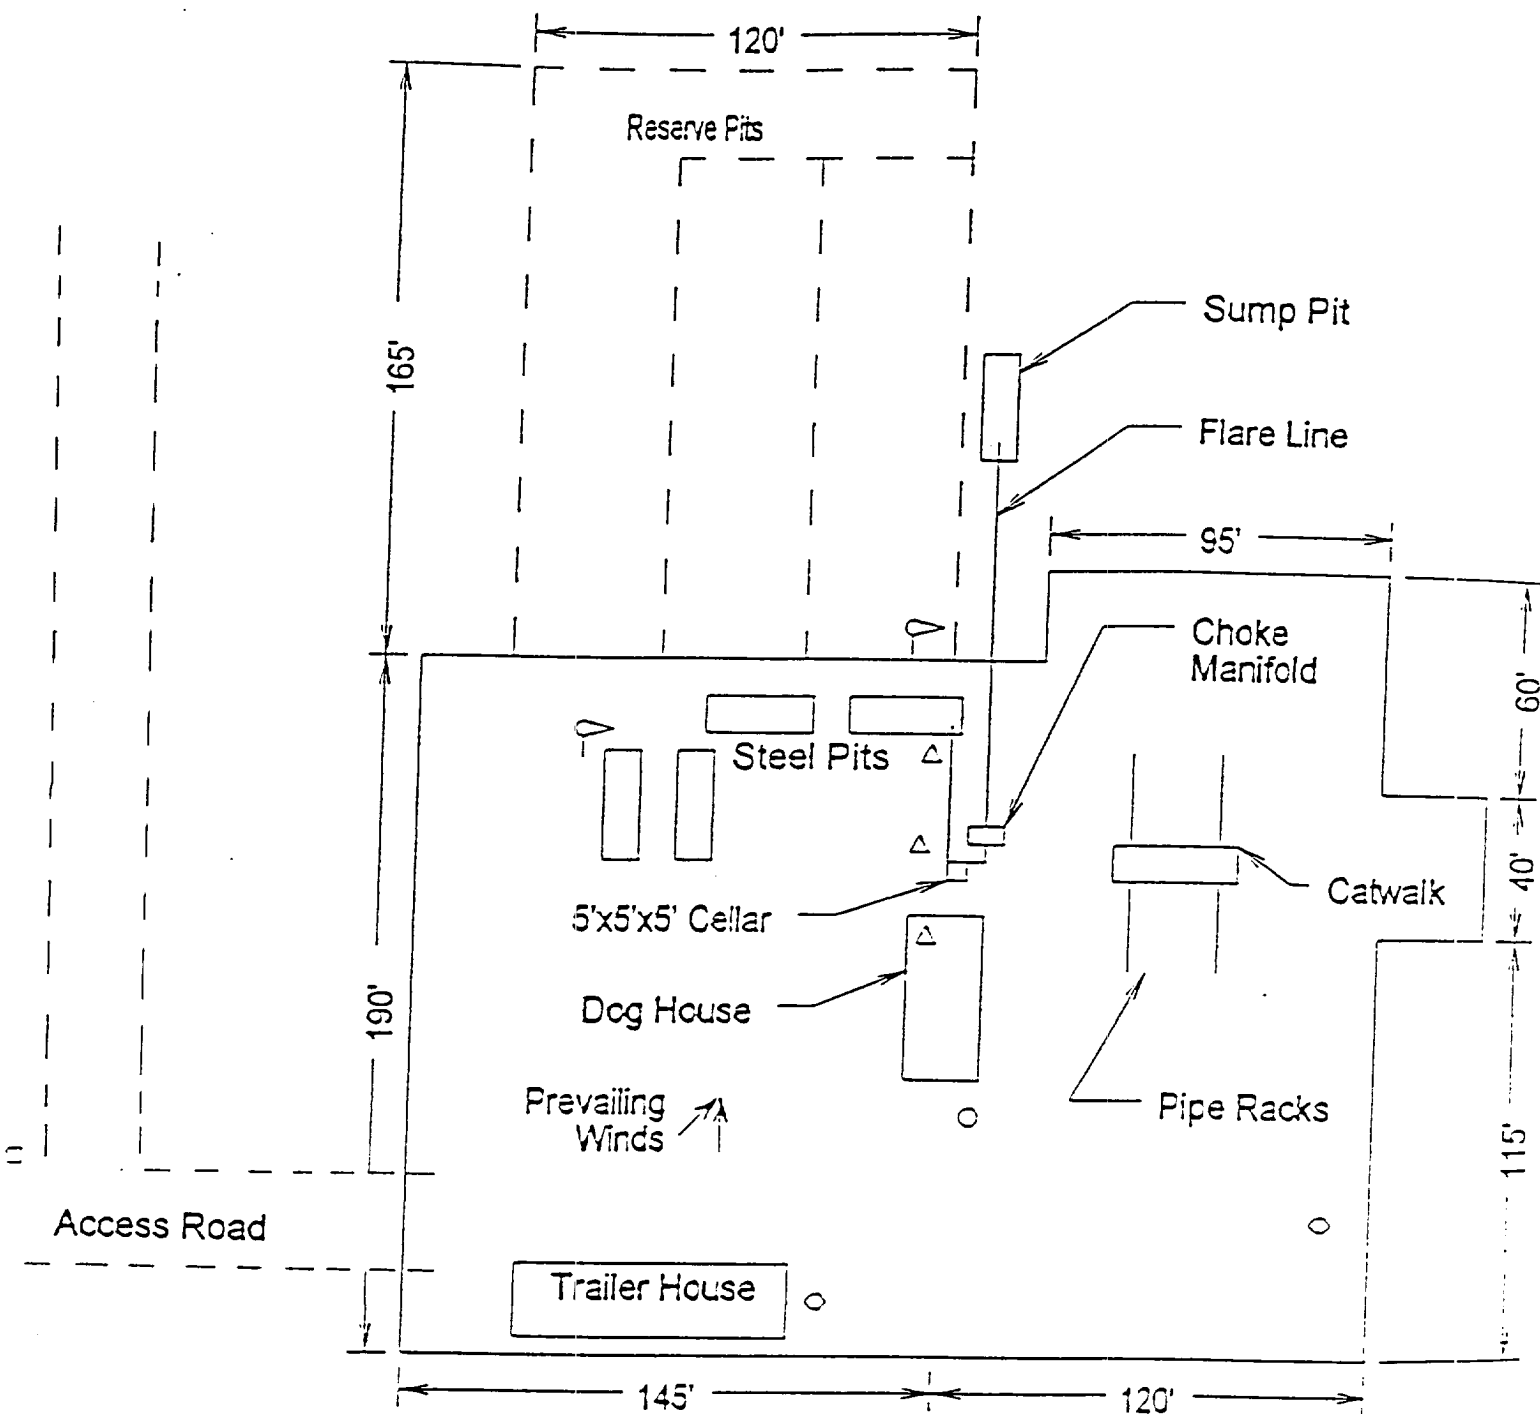

- ⤴ Wind Direction Indicators (wind sock or streamers)
- △ H2S Monitors (alarms at bell nipple and shale shaker)
- Briefing Areas
- Remote EOP Closing Unit
- Sign and Condition Flags

EXHIBIT "D"
RIG LAY OUT PLAT

CONCHO RESOURCES, INC.
TOMCAT "17" FEDERAL # 8
UNIT "L" SECTION 17
T23S-R32E LEA CO. NM

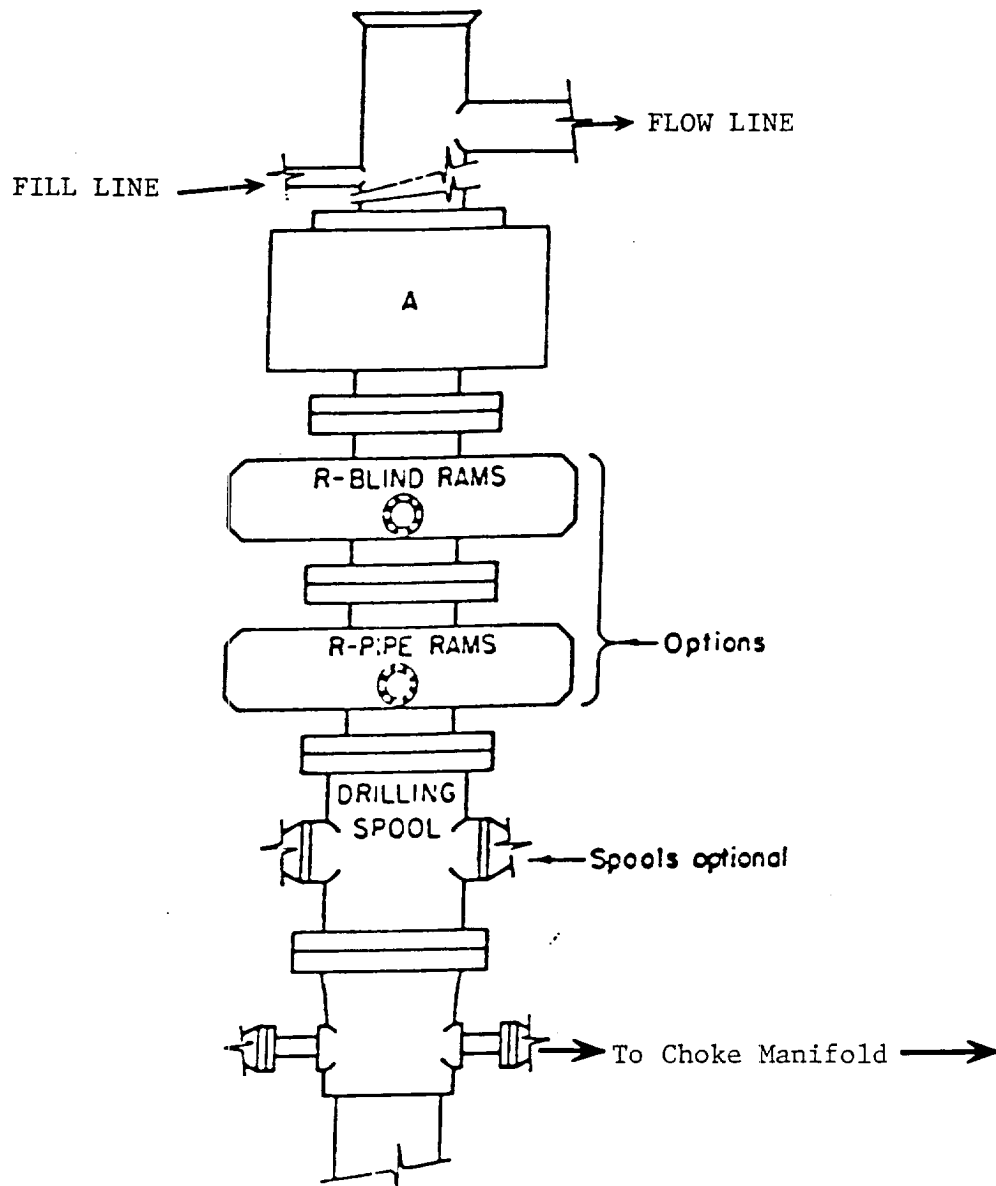


ARRANGEMENT SRRA

900 Series
3000 PSI WP

EXHIBIT "E"
SKETCH OF B.O.P TO BE USEN ON

CONCJO RESOURCES, INC.
TOMCAT "17" FEDERAL # 8
UNIT "L" SECTION 17
T23S-R32E LEA CO. NM

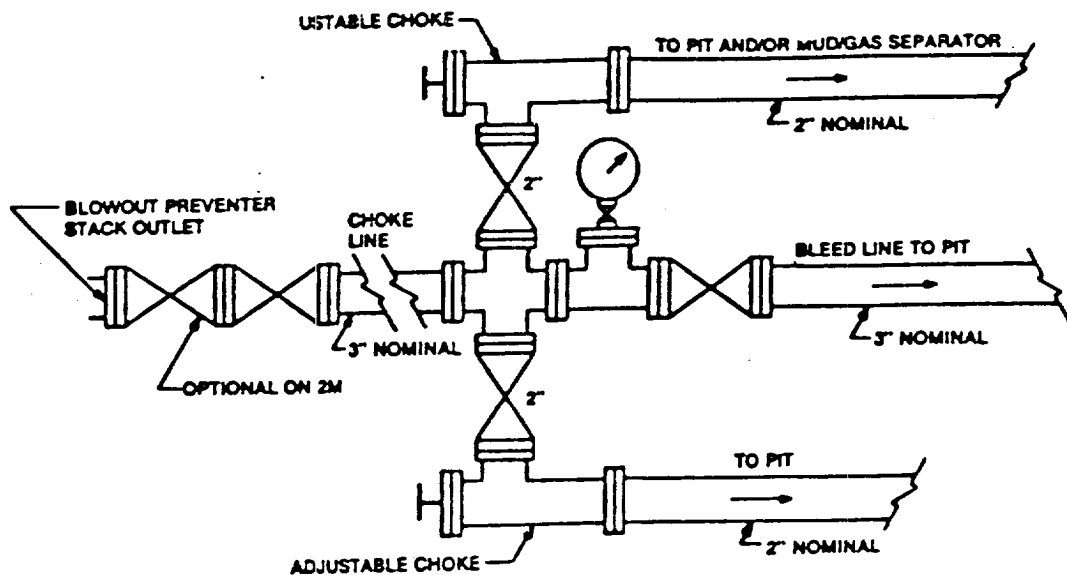

Typical choke manifold assembly for 3M WP system

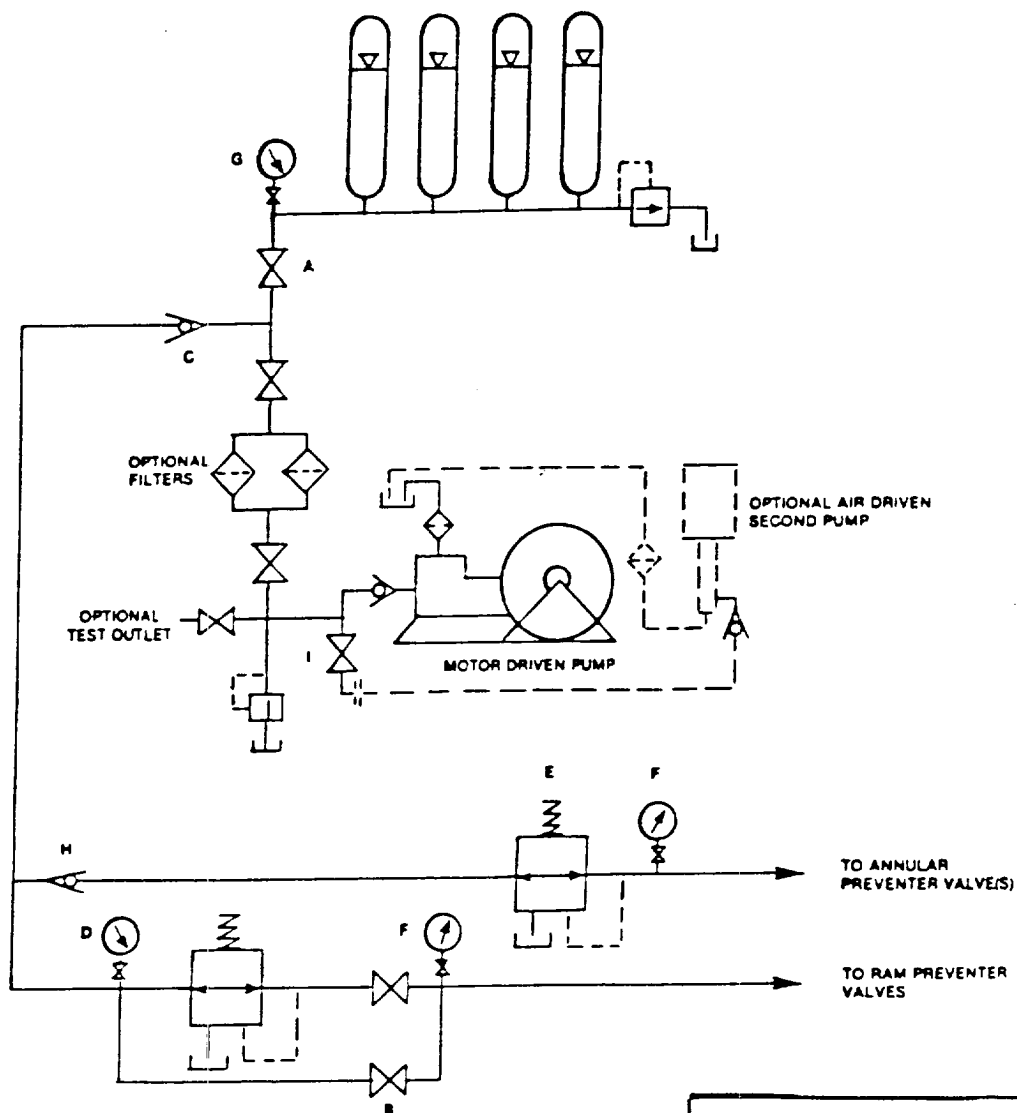


EXHIBIT "E-1"
CHOKE MANIFOLD & CLOSING UNIT

CONCHO RESOURCES, INC.
TOMCAT "17" FEDERAL # 8
UNIT "L" SECTION 17
T23S-R32E LEA CO. NM

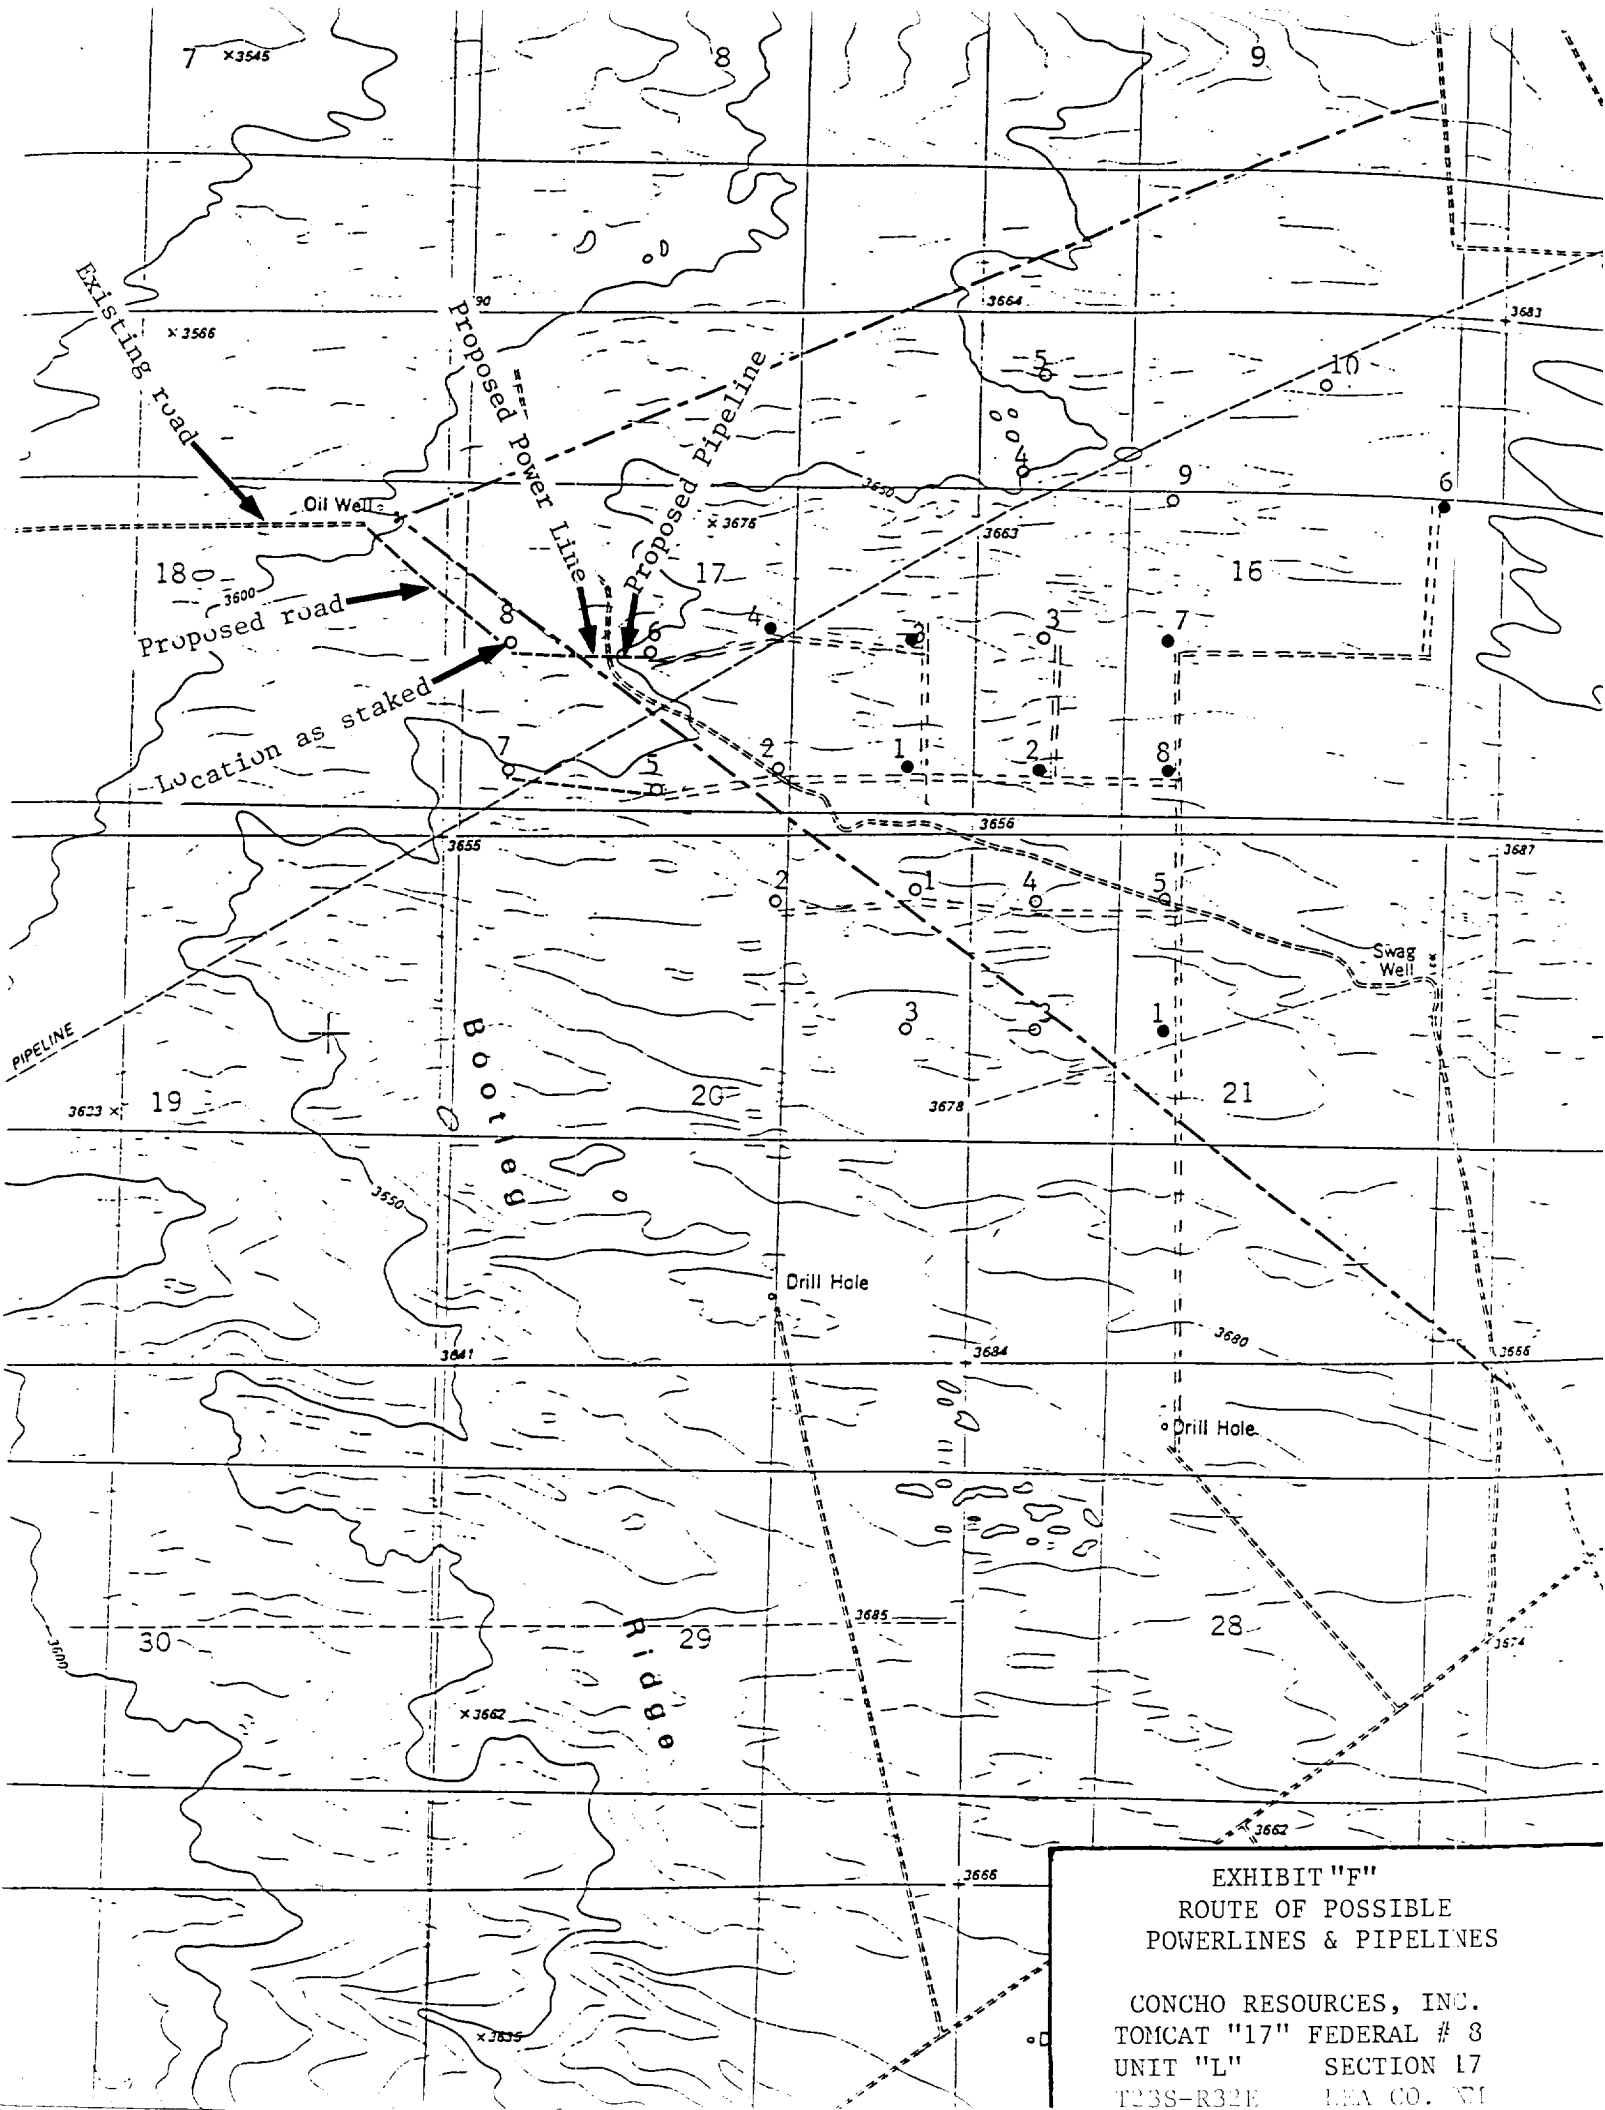


EXHIBIT "F"
ROUTE OF POSSIBLE
POWERLINES & PIPELINES

CONCHO RESOURCES, INC.
TOMCAT "17" FEDERAL # 8
UNIT "L" SECTION 17
T23S-R32E L&A CO. NW