


COPY TO O. C. C. HOBBS  
(SUBMIT IN TRIPPLICATE)

Land Office Las Cruces  
Lease No. 068777

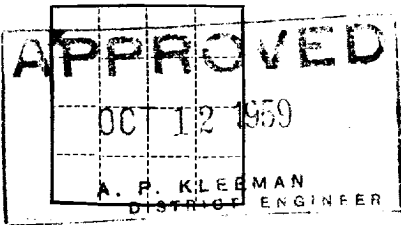

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Unit D  
9 07

OCT 12 1950

SUNDRY NOTICES AND REPORTS ON WELLS

HOBBS, NEW MEXICO

NOTICE OF INTENTION TO DRILL.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

October 9, 1950

Well No. Bradley 35 2 is located 600 ft. from {N} line and 600 ft. from {E} line of sec. 35

26-4 (Twp.) 32 (Range) Meridian (Meridian)  
El Bar (Field) elaware (County or Subdivision) New Mexico (State or Territory)

The elevation of the derrick floor above sea level is 3295 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

It is intended to drill a well at above location with rotary tools to a depth of 4590' in the Delaware Sand. Casing will be cemented in accordance with USGS regulations and other special requirements will be complied with.

Planned casing pattern: 7 5/8" at 350' with 150 sacks, cement to circulate. 4 1/2" casing at 4590' with 170 sacks, cement to return to 4000'.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Continental Oil Company

Address Box 68

Lunice, New Mexico

By [Signature]

Title District Superintendent

0/4 U/S/plats; 40; 40; 0 1/2/plat; 40