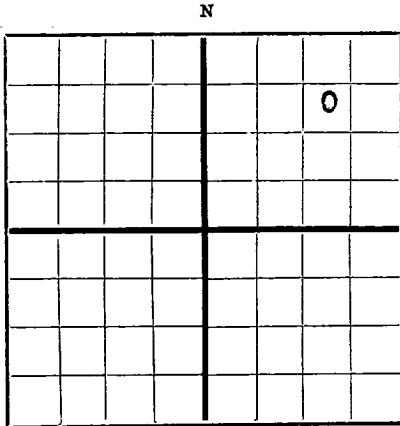
NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New MexicoAREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Gulf Oil Corporation Hobbs, New Mexico
Company or Operator Address
J. F. Janda "G" Well No. **1** in **SW NE NE** of Sec. **24**, T. **23 S**
Lease
R. **36 E**, N. M. P. M., **Langlie-Mattis** Field, **Lea** County.
Well is **990** feet south of the North line and **990** feet west of the East line of **Section 24**
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is **Mr. Matkins** Address **Jal, New Mexico**
If Government land the permittee is Address
The Lessee is **Gulf Oil Corporation - Gypsy Division** Address **Tulsa, Oklahoma**
Drilling commenced **May 11, 1948** Drilling was completed **June 2, 1948**
Name of drilling contractor **Wiggins Drilling Company** Address **Hobbs, New Mexico**
Elevation above sea level at top of casing **3355** feet.
The information given is to be kept confidential until 19

GAS

SANDS OR ZONES

No. 1, from **2870** to **2945** No. 4, from **3275** to **3315**
No. 2, from **3010** to **3130** No. 5, from to
No. 3, from **3155** to **3240** No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to **(Rotary tools)** feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
9-5/8"	40#	8 V	SH						
	40#	8 V	SS	285'					
5 1/2"	14#	8 Rd	SS	2804'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
13-3/4"	9-5/8"	297'	250	HOWCO		
7-7/8"	5 1/2"	2816'	450	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		none				

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0'** feet to **3352** feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing **Shut-in. Will be put to production when facilities for sale are completed.**
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours **15,000,000 MCF, extended** Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in. **1245**

EMPLOYEES

Wiggins Drilling Company Driller Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **16th** day of **June**, 19**48** Hobbs, New Mexico **June 16, 1948**
Name **E. J. Gallagher**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	305'		Red Bed
	800		Red Bed and Shells
	1145		Shells & Sandy Shale
	1190		Red Bed
	1295		Anhydrite
	1320		Salt
	2680		Salt & Anhydrite
	2695		Anhydrite
	2825		Anhydrite & Lime
	2903		Lime
	2932		Lime & Anhydrite
	3010		Lime
	3031		Lime & Shale
	3043		Sandy Lime
	3049		Lime & Shks. shale
	3094		Lime
	3122		Lime & Shale
	3153		Sandy Lime
	3352 (TOTAL DEPTH)		Lime
			<u>FORMATION TOPS</u>
			Anhydrite 1190'
			Base Salt 2680
			Brown Lime 2730
			GAS PAY 2870