

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division
1625 N. French Dr.
Hobbs, NM 88240

FORM APPROVED
OMB NO. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☐ Oil Well ☐ Gas Well ☒ Other

Injection

2. Name of Operator

OXY USA WTP Limited Partnership

192463

3a. Address

P.O. Box 50250, Midland, TX 79710-0250

3b. Phone No. (include area code)

915-685-5717

7. If Unit or CA/Agreement, Name and/or
Myers Langlie Mattix Unit

8. Well Name and No.

37

9. API Well No.

30-025-09418

10. Field and Pool, or Exploratory Area
Langlie Mattix 7Rvr On-GB

11. County or Parish, State

Lea NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION


- | | | | |
|---|--|--|---|
| <input type="checkbox"/> Acidize | <input type="checkbox"/> Deepen | <input type="checkbox"/> Production (Start/Resume) | <input type="checkbox"/> Water Shut-Off |
| <input type="checkbox"/> Alter Casing | <input type="checkbox"/> Fracture Treat | <input type="checkbox"/> Reclamation | <input type="checkbox"/> Well Integrity |
| <input type="checkbox"/> Casing Repair | <input type="checkbox"/> New Construction | <input type="checkbox"/> Recomplete | <input type="checkbox"/> Other |
| <input type="checkbox"/> Change Plans | <input checked="" type="checkbox"/> Plug and Abandon | <input type="checkbox"/> Temporarily Abandon | |
| <input type="checkbox"/> Convert to Injection | <input type="checkbox"/> Plug Back | <input type="checkbox"/> Water Disposal | |

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

TD-3602' OH-3478-3602'

10-3/4" 32.75# csg @ 295' W/ 200sx, 13-3/4" hole, TOC-Circ
7-5/8" 24# csg @ 1204' W/ 500sx, 9-7/8" hole,
1/50-Perf @ 860', sqz W/ 1000sx, TOC-250'-TS
5-1/2" 14# csg @ 3478' W/ 800sx, 6-3/4" hole, TOC-1240'-TS

1. RIH & set CIRP @ 3428', Dump 5sx cmt to 3393'
2. M&P 25sx cmt @ 2950-3330'
3. Perf @ 1254', sqz 35sx cmt to 1154' - TAG
4. Perf @ 345', sqz 35sx cmt to 245' - TAG
5. M&P 10sx cmt surface plug
- 10# MLF between plugs

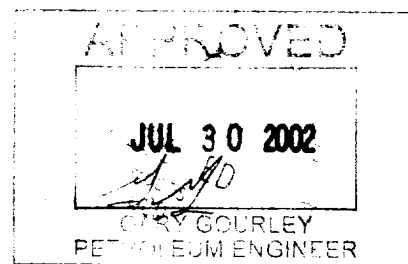

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

David Stewart

Title

Sr. Regulatory Analyst

Date

7/25/02

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

ORIGINAL SIGNED BY

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject area which would entitle the applicant to conduct operations thereon.

Office

OC REP/STAFF MANAGER

AUG 06 2002

Title 18 U.S.C. Section 1001, and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

OXY USA INC. PROPOSED
MYERS LANGLEY MATTIX UT 37
SEC 25 T23S R36E LEA NM

0.0 - 75.0' CEMENT PLUG 10sx


245.0 - 345.0' CEMENT PLUG 35sx

1154.0 - 1254.0' CEMENT PLUG 35sx

2830.0 - 2930.0' CEMENT PLUG 25sx

3393.0 - 3428.0' CEMENT PLUG 5sx

3428.0 - 3428.0' CIP

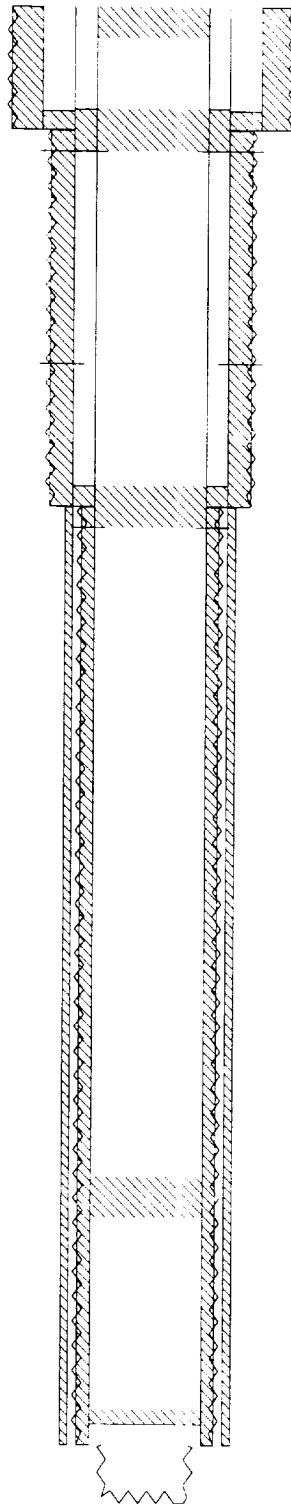

TD: 3602

0.0 - 295.0' 13-3/4\" OD HOLE
0.0 - 295.0' CEMENT 200sx-CIRC
0.0 - 295.0' 10-3/4\" OD SURF CSG

345.0 - 345.0' SQUEEZE PERFS

295.0 - 1204.0' 9-7/8\" OD HOLE
850.0 - 860.0' SQUEEZE PERFS 1/50
250.0 - 3478.0' CEMENT 1500x-TS
0.0 - 1204.0' 7-5/8\" OD INT CSG

1254.0 - 1254.0' SQUEEZE PERFS

1204.0 - 3478.0' 6-3/4\" OD HOLE
1240.0 - 3478.0' CEMENT 800sx-TS
0.0 - 3478.0' 5-1/2\" OD PROD CSG

3478.0 - 3602.0' 4-1/4\" OD HOLE