


N

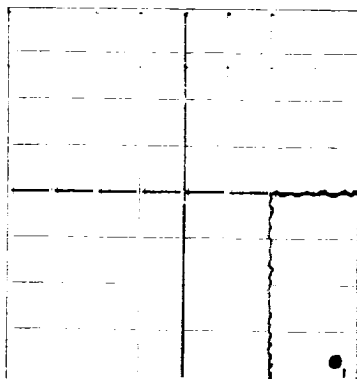

AREA 400 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Barnsdall Oil Company

Pulsa, Oklahoma

Company or Operator

Address

J. Whitten

Well No.

11

in

SE

of Sec.

33

T.

233

R.

363

N. M. P. M.

Cooper

Field.

Lea

County

Well is 4950 feet south of the North line and 330 feet west of the East line of ~~Sec. 33-233-233~~

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is ~~Mr. John W. Whitten, et al~~ Address ~~Jal, New Mexico~~

If Government land the permittee is Address

The Lessee is Barnsdall Oil Company

Address Pulsa, Oklahoma - Box #2039

Drilling commenced December 7, 1937 Drilling was completed January 11, 1938

Name of drilling contractor Lee Drilling Co., Inc.

Address

Elevation above sea level at top of casing 3405 feet.

The information given is to be kept confidential until No 19

OIL SANDS OR ZONES

No. 1, from 3590 to 3595 No. 4, from to
No. 2, from 3595 to 3616 No. 5, from to
No. 3, from 3627 to 3629 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13"OD	40#	8	J & L	312'7"	Tex. Pat.			
9 5/8"OD	34#	8	J & L	1439'9"	Bakblu			
7"OD	24#	10	Smis.	3568'	Bakblu			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15"	13"OD	312'7"	200	Halliburton		
12"	9 5/8"	1439'9"	475	Halliburton		
8 1/2"	7"OD	3568'	160	Halliburton		

PLUGS AND ADAPTERS

Heaving plug Material None Length - Depth Set -
Adapters Material None Size -

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
No Shot or Acid Treatment						

Results of shooting or chemical treatment No Shot or Chemical Treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3630 feet, and from feet to feet
Cable tools were used from No feet to feet, and from feet to feet

PRODUCTION

Put to producing January 11, 1938
At the rate of 60 bbls. per hr. through 2" tubing
The production of the first 24 hours was 100 barrels of fluid of which 100% was oil. No emulsion.
No % water; and No % sediment. Gravity, B. 30.2 @ 60°
If gas well, cu. ft. per 24 hours No Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Geo. Webb

Driller A. L. McDow

Driller

O. J. Collins

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this

Odessa, Texas

January 29, 1938

Place

Date

day of 1938

Name

Position Production Clerk

Representing Barnsdall Oil Company

Company or Operator

My Commission expires

Address Odessa, Texas - Box #472

Notary Public

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	285	285	Caliche & Sand
285	320	35	Red Bed
320	450	130	Gyp & Red Bed
450	785	335	Red Rock & Shale
785	885	100	Red Rock & Sand
885	1005	120	Red Bed
1005	1065	60	Red Bed & Shale
1065	1165	100	Red Rock & Sand
1165	1230	65	Red Bed & Anhydrite
1230	1270	40	Shale & Lime Shells
1270	1300	30	Red Rock & Gyp
1300	1380	80	Red Shale
1380	1460	80	Gr. Anhydrite
1460	1480	20	Br. Lime & Gr. Anhydrite
1480	1500	20	Gr. Anhydrite & Br. Lime
1500	1515	15	Anhydrite
1515	1540	25	Salt
1540	1610	70	Salt & Shells
1610	1835	225	Salt & Anhydrite
1835	2005	170	Salt & Shells
2005	2070	65	Salt
2070	2125	55	Salt & Shells
2125	2340	215	Salt
2340	2625	285	Salt & Shells
2625	2673	48	Salt & Anhydrite
2673	3025	352	Salt & Shells
3025	3100	75	Salt
3100	3150	50	White Salt
3150	3160	10	White Anhydrite & Salt
3160	3170	10	White Anhydrite
3170	3180	10	White Anhydrite & Brown Lime
3180	3190	10	White Anhydrite
3190	3200	10	White Anhydrite
3200	3210	10	White Anhydrite & Brown Lime
3210	3220	10	Brown Lime & White Anhydrite
3220	3270	50	Brown Lime
3270	3290	20	Grey & Brown Lime
3290	3340	50	Brown Lime
3340	3360	20	Brown Lime & Fine Grey Sand
3360	3390	30	Gray Lime & Fine Grey Sand
3390	3400	10	Gray Lime & Fine Grey Sand
3400	3490	90	Gray Lime & Fine Grey Sand
3490	3585	95	Gray Lime
3585	3595	10	Gray Lime
3595	3600	5	Gray Lime
3600	3620	20	Gray Lime & Grey Sand
3620	3630	10	Gray Lime

TOTAL DEPTH - 3630'