



N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

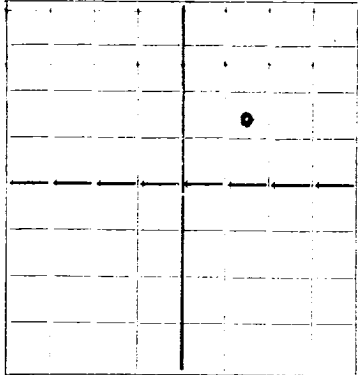

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

DUPLICATE

Shell Petroleum Corporation Hobbs, N.M.
Company or Operator Address
John Shitten Well No. 1 in 23/4 of Sec. 33 T. 23-S
R. 36-E N. M. P. M. Lynn Field, County.
Well is 1350 feet south of the North line and 160 feet west of the East line of 23/4 Sec. 33
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is John Shitten Address Cooper, N.M.
If Government land the permittee is Address
The Lessee is Shell Petroleum Corporation Address Houston, Texas
Drilling commenced 2-24-1938 Drilling was completed 3-16-1938
Name of drilling contractor Oil Well Drlg. Co. Address Dallas, Texas
Elevation above sea level at top of casing 3326 feet.
The information given is to be kept confidential until Not confidential 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 3805 feet to Total Depth 2000' in 20 Mins.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	2-5/8"	1459'	650	Halliburton		

PLUGS AND ADAPTERS

Heavy plug Material Cement Length 222' Depth Set 3838'-3810'
Adapters Material " Size 100' 1000'-3100'
75' 1384'-1459'
RECORD OF SHOOTING OR CHEMICAL TREATMENT 0'-50'

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0' feet to 3810' feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing 19
The production of the first 24 hours was DRY & ABANDONED barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller J. J. Dubois
Driller J. J. Randolph
S. Cobb

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 30 day of May 1938
Notary Public
My Commission expires
Place Date
Name E. B. Kinney
Position Dist. Sup't.
Representing Shell Pet. Corp.
Company or Operator
Address Dr. #1457-Hobbs, N.M.

FORMATION RECORD


FROM	TO	THICKNESS IN FEET	FORMATION
0'	275'		Caliche & sand
275'	1432'		red beds
1432'	1500'		Anhydrite
1500'	1515'		Salt
1515'	1560'		Anhydrite
1560'	3065'		Salt & anhydrite
3065'	3085'		Anhydrite
3085'	3135'		Salt
3135'	3353'		Anhydrite & lime
3353'	3695'		Lime, hard grey w/stks. sand
3695'	3810'		Soft grey lime

N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD



HOBBS OFFICE

DUPLICATE

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Shell Petroleum Corporation
Company or Operator

Hobbs, N.M.
Address

John Whitten Well No. 1 in SE/4 of Sec. 33, T. 23-S

R. 36-E, N. M. P. M., Lynn Field, Lea County.

Well is 1550 feet south of the North line and 1600 feet west of the East line of SE/4 Sec. 33

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is John Whitten Address Cooper, N.M.

If Government land the permittee is Address

The Lessee is Shell Petroleum Corporation Address Houston, Texas

Drilling commenced 2-24-1938 Drilling was completed 3-16-1938

Name of drilling contractor Oil Well Drig. Co. Address Dallas, Texas

Elevation above sea level at top of casing 3326 feet.

The information given is to be kept confidential until Not confidential 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 3805 feet to Total Depth 2000 feet in 20 Mins.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8"	1459'	650	Halliburton		

PLUGS AND ADAPTERS

Heavy plug—Material Cement Length 222' Depth Set 3588'-3810'
Adapters—Material " Size 100' 3000'-3100'
" 75' 1384'-1459'
RECORD OF SHOOTING OR CHEMICAL TREATMENT 0'-50'

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3810 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing DRY & ABANDONED 19
The production of the first 24 hours was barrels of fluid of which % was oil; %
emulsion; % water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

W.L. Dubois Driller L. J. Randolph Driller
B. Cobb Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 4

day of May 1938

L. J. Randolph
Notary Public

My Commission expires

Place Date

Name E. R. Jimmy

Position Dist. Sup't.

Representing Shell Pet. Corp.
Company or Operator

Address Dr. #1457-Hobbs, N.M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	275'		Caliche & sand
275'	1432'		red beds
1432'	1500'		Anhydrite
1500'	1515'		Salt
1515'	1560'		Anhydrite
1560'	3065'		Salt & anhydrite
3065'	3085'		Anhydrite
3085'	3135'		Salt
3135'	3353'		Anhydrite & Lime
3353'	3605'		Lime, hard grey w/stks. sand
3605'	3810'		Soft grey Lime