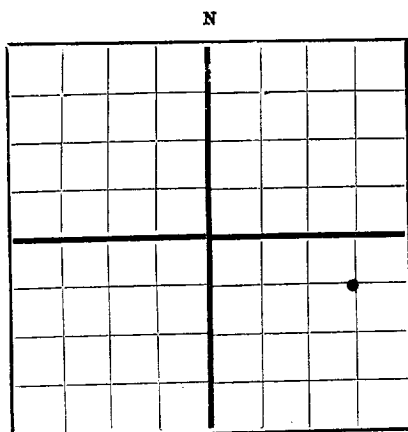
NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Gulf Oil Corporation Hobbs, New Mexico
Company or Operator Address
J. R. Holt "B" Well No. 1 in NE SE of Sec. 36, T. 23S
Lease
R. 36E, N. M. P. M., Langlie-Mattix Field, Lea County.
Well is 1980 feet North of the South line and 660 feet west of the East line of Section 36
If State land the oil and gas lease is No. B-243 Assignment No. _____
If patented land the owner is _____, Address _____
If Government land the permittee is _____, Address _____
The Lessee is Gulf Oil Corporation - Gypsy Division, Address Tulsa, Oklahoma
Drilling commenced April 23 1949 Drilling was completed May 26 1949
Name of drilling contractor McVay & Stafford Drilling Company, Address Hobbs, New Mexico
Elevation above sea level at top of casing 3329 feet.
The information given is to be kept confidential until _____ 19____.

OIL SANDS OR ZONES

No. 1, from 2960' to 3140' No. 4, from _____ to _____
No. 2, from 3595' to 3610' No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to (ROTARY TOOLS) feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
<u>9 5/8"</u>	<u>36#</u>	<u>8 RD</u>	<u>SS</u>	<u>308'</u>					
<u>5 1/2"</u>	<u>17#</u>	<u>10 V</u>	<u>"</u>	<u>3438'</u>					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>12 1/4"</u>	<u>9 5/8"</u>	<u>322'</u>	<u>200</u>	<u>HOWCO</u>		
<u>7 7/8"</u>	<u>5 1/2"</u>	<u>3450'</u>	<u>750</u>	<u>"</u>		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
<u>3 1/2"</u>	<u>WJ</u>	<u>Solidified Nitro-Glyc.</u>	<u>200 qts</u>	<u>4-19-49</u>	<u>3501' to 3610'</u>	<u>3610'</u>

Results of shooting or chemical treatment Flowed 137 bbls. of oil in 12 hours - API Gravity 36.9.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0' feet to 3610 feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing May 26 1949
The production of the first 12 hours was 137 barrels of fluid of which 100 % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be. _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas. _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

McVay & Stafford Drilling Company, Driller _____, Driller _____
_____, Driller _____, Driller _____

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 9thday of June, 1949

Notary Public

My Commission expires 10-24-49Hobbs, New Mexico June 9, 1949Name E. J. GallagherPosition District Sup'tRepresenting Gulf Oil CorporationAddress Box 1667, Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	40		Caliche
	100		Clay, sand and gravel
	325		Red rock
	430		Shells and clay
	810		Red rock
	870		Red bed and shells
	920		Sand and shells
	1090		Red bed and shells
	1160		Red rock and shells
	1272		Anhydrite
	2225		Anhydrite and salt
	2285		Anhydrite
	2487		Anhydrite and salt
	2553		Anhydrite and salt streaks
	2772		Anhydrite and salt
	2814		Anhydrite
	2869		Anhydrite and gyp
	2902		Lime
	2919		Lime and gyp
	2939		Lime and anhydrite
	2968		Lime and sand
	2975		Lime
	3063		Lime and sand
	3140		Lime
	3185		Lime and sand
	3210		Lime
	3248		Lime and sand
	3494		Lime
	3512		Lime and sand
	3530		Lime
	3543		Lime and sand
	3561		Lime
	3600		Lime and sand
	3610		Lime and sand

FORMATION TOPS

Anhydrite	1170'
Base salt	2770
Brown lime	2860
Oil pay	3595 to 3610