

AMENDED

TRIPPLICATE

MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

RECEIVED JUL 6 1949

NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes shall be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico Place

July 2, 1949 Date


OIL CONSERVATION COMMISSION, Santa Fe, New Mexico,

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as \_\_\_\_\_

Gulf Oil Corp. - GYPROD Company or Operator Holt "B" well No. 2 in C SE SE Lease

of Sec. 36, T. 23S, R. 36E, N. M., P. M., Langlie-Mattie, Lea County.

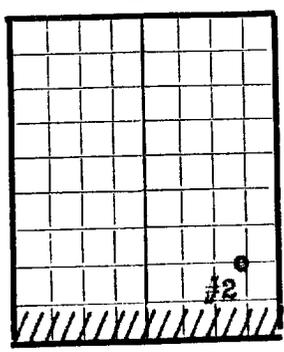

AREA 640 ACRES

LOCATE WELL CORRECTLY

The well is 660 feet (N.) (S) of the South line and 660 feet (E) (W.) of the East line of Section 36

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. B-243 Assignment No. \_\_\_\_\_

If patented land the owner is \_\_\_\_\_

Address \_\_\_\_\_

If government land the permittee is \_\_\_\_\_

Address \_\_\_\_\_

The lessee is Gulf Oil Corporation - GYPROD

Address Box 661, Tulsa, Oklahoma

We propose to drill well with drilling equipment as follows: \_\_\_\_\_

Rotary Tools - Two States Drlg. Co.

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: \_\_\_\_\_

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
12-1/4"	9-5/8"	36#	New	300'	Cemented	825
7-3/8"	5-1/2"	15.5#	New	3450'	Cemented	750 First Stage
With Halliburton DV stage cementing tool at 1230'						120 Second Stage

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3450 feet.

Additional information: Due to the 5-1/2" being a two stage cementing job, it will not be possible to run a temperature survey to determine top of the cement.

Approved JUL 6 1949, 19 \_\_\_\_\_ except as follows:

Sincerely yours,

Gulf Oil Corporation - GYPROD Company or Operator

By Chas. Jaybo

Position Ass't. District Superintendent

Send communications regarding well to:

Name E. J. Gallagher

Address Box 1667, Hobbs, New Mexico

OIL CONSERVATION COMMISSION,

By [Signature] Title \_\_\_\_\_