


SKELLY OIL CO.
Coates #3
3-24-36 Lea, N.M.

$$Q_2 = 2150; \log = 3.332438$$

$$Q_1 = 275; \log = \underline{2.439332}$$

$$0.893106 = \text{slope } n$$

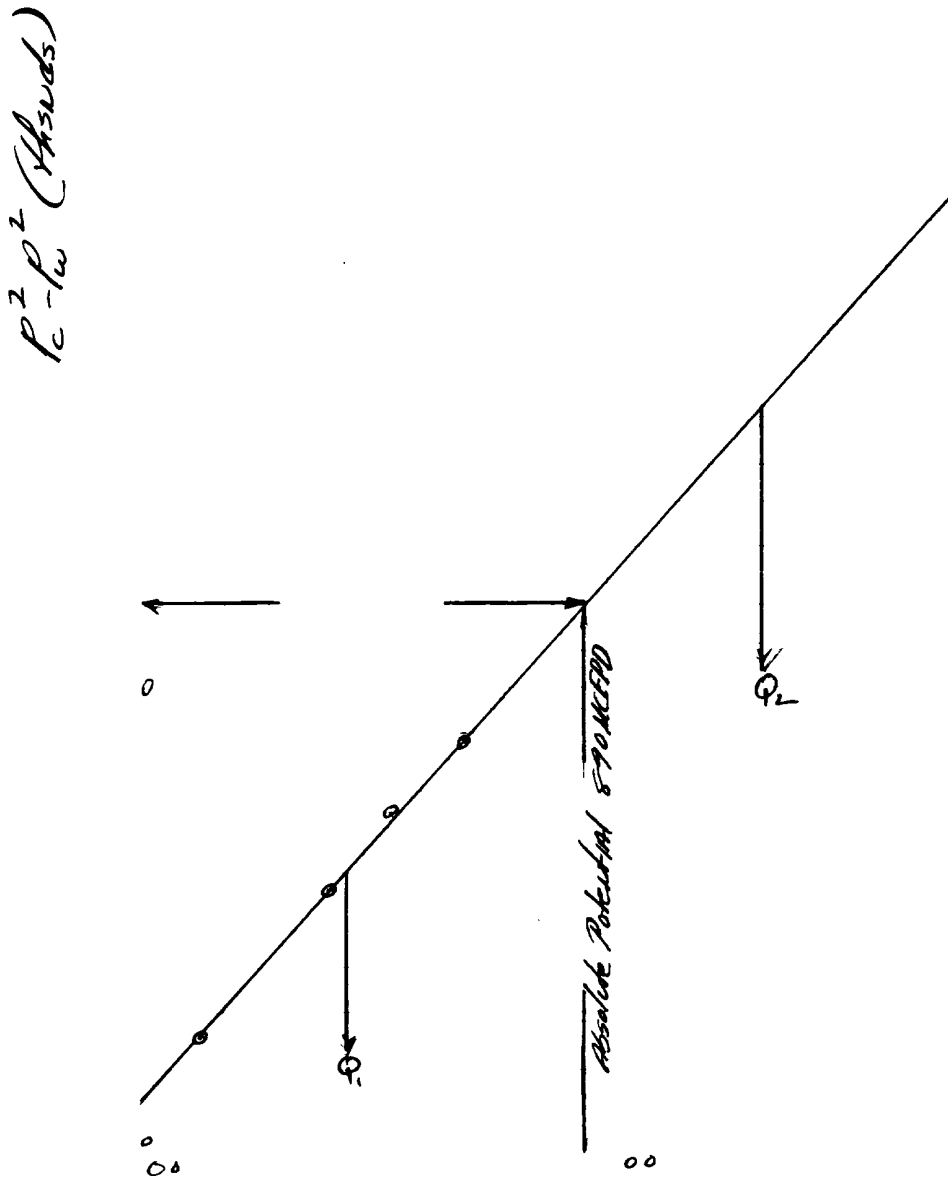

Q - MCFPD - 15.025 psia 60°F

NEW MEXICO OIL CONSERVATION

Form C-122

Revised 12-1-55

MULTI-POINT BACK PRESSURE TEST FOR GAS WELLS

Pool Jalnet Formation Yates County LeaInitial _____ Annual _____ Special XX Date of Test 12-10/12-14 1956Company Skelly Oil Company Lease Coates Well No. 3Unit M Sec. 3 Twp. 24 Rge. 36 Purchaser El Paso Natural Gas CompanyCasing 7" Wt. 24# I.D. 6.336" Set at 3543' Perf. 3366' To 3496'Tubing 2" Wt. 4.7# I.D. 1.995" Set at 3400 Perf. _____ To _____Gas Pay: From 3366' To 3496' L 3400 xG 0.670 -GL 2278 Bar.Press. 13.2Producing Thru: Casing _____ Tubing X Type Well SingleDate of Completion: 10-7-35 Packer 3155 Single-Bradenhead-G. G. or G.O. Dual
Reservoir Temp. _____

OBSERVED DATA

Tested Through (~~PRAYAK~~)(~~AKHAK~~) (Meter) Type Taps _____

No.	Flow Data					Tubing Data		Casing Data		Duration of Flow Hr.
	(PRAYAK) (Line) Size	(AKHAK) (Orifice) Size	Press. psig	Diff. h _w	Temp. °F.	Press. psig	Temp. °F.	Press. psig	Temp. °F.	
SI						<u>373</u>				<u>72</u>
1.	<u>4</u>	<u>0.750</u>	<u>239</u>	<u>6.35</u>	<u>58</u>	<u>349</u>				<u>72 24</u>
2.	<u>4</u>	<u>0.750</u>	<u>240</u>	<u>23.04</u>	<u>59</u>	<u>319</u>				<u>24</u>
3.	<u>4</u>	<u>0.750</u>	<u>246</u>	<u>36.00</u>	<u>52</u>	<u>294</u>				<u>24</u>
4.	<u>4</u>	<u>0.750</u>	<u>245</u>	<u>86.49</u>	<u>60</u>	<u>247</u>				<u>24</u>
5.										

FLOW CALCULATIONS

No.	Coefficient (24-Hour)	$\sqrt{h_w p_f}$	Pressure psia	Flow Temp. Factor F _t	Gravity Factor F _g	Compress. Factor F _{pv}	Rate of Flow Q-MCFPD @ 15.025 psia
1.	<u>3.435</u>	<u>39.69</u>		<u>1.0019</u>	<u>0.9463</u>	<u>1.027</u>	<u>132</u>
2.	<u>3.435</u>	<u>76.35</u>		<u>1.0010</u>	<u>0.9463</u>	<u>1.028</u>	<u>255</u>
3.	<u>3.435</u>	<u>96.56</u>		<u>1.0078</u>	<u>0.9463</u>	<u>1.029</u>	<u>326</u>
4.	<u>3.435</u>	<u>149.38</u>		<u>1.0000</u>	<u>0.9463</u>	<u>1.027</u>	<u>498</u>
5.							

PRESSURE CALCULATIONS

Gas Liquid Hydrocarbon Ratio _____ cf/bbl.
Gravity of Liquid Hydrocarbons _____ deg.
F_c 9.936 (1-e^{-s}) 0.145 Specific Gravity Separator Gas _____
Specific Gravity Flowing Fluid _____
F_c 386.2 P_c 149.2

No.	P _w P _t (psia)	P _t ²	F _c Q	(F _c Q) ²	(F _c Q) ² (1-e ^{-s})	P _w ²	P _c ² -P _w ²	Cal. P _w	P _w P _c
1.	<u>362.2</u>	<u>131.2</u>	<u>1.31</u>	<u>1.72</u>	<u>0.25</u>	<u>131.5</u>	<u>17.7</u>		
2.	<u>332.2</u>	<u>110.4</u>	<u>2.53</u>	<u>6.40</u>	<u>0.93</u>	<u>111.3</u>	<u>37.9</u>		
3.	<u>307.2</u>	<u>94.4</u>	<u>3.24</u>	<u>10.50</u>	<u>1.52</u>	<u>95.9</u>	<u>53.3</u>		
4.	<u>260.2</u>	<u>67.7</u>	<u>4.98</u>	<u>24.50</u>	<u>3.55</u>	<u>71.3</u>	<u>77.9</u>		
5.									

Absolute Potential: 890 MCFPD; n 0.893COMPANY Skelly Oil CompanyADDRESS Box 38, Hobbs, New Mexico

AGENT and TITLE _____

WITNESSED _____

COMPANY _____

REMARKS

INSTRUCTIONS

This form is to be used for reporting multi-point back pressure tests on gas wells in the State, except those on which special orders are applicable. Three copies of this form and the back pressure curve shall be filed with the Commission at Box 871, Santa Fe.

The log log paper used for plotting the back pressure curve shall be of at least three inch cycles.

NOMENCLATURE

Q = Actual rate of flow at end of flow period at W. H. working pressure (P_w).
MCF/da. @ 15.025 psia and 60° F.

P_c = 72 hour wellhead shut-in casing (or tubing) pressure whichever is greater.
psia

P_w = Static wellhead working pressure as determined at the end of flow period.
(Casing if flowing thru tubing, tubing if flowing thru casing.) psia

P_t = Flowing wellhead pressure (tubing if flowing through tubing, casing if
flowing through casing.) psia

P_f = Meter pressure, psia.

h_w = Differential meter pressure, inches water.

F_g = Gravity correction factor.

F_t = Flowing temperature correction factor.

F_{pv} = Supercompressibility factor.

n = Slope of back pressure curve.

Note: If P_w cannot be taken because of manner of completion or condition of well, then P_w must be calculated by adding the pressure drop due to friction within the flow string to P_t .

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-122

MULTI-POINT BACK PRESSURE TEST FOR GAS WELLS

Revised 12-1-55

Pool Jalnet Formation Yates County Lea
Initial _____ Annual _____ Special XX Date of Test 12-10/12-14 1956
Company Skelly Oil Company Lease Coates Well No. 3
Unit M Sec. 3 Twp. 24 Rge. 36 Purchaser El Paso Natural Gas Company
Casing 7" Wt. 24# I.D. 6.336" Set at 3543' Perf. 3366' To 3496'
Tubing 2" Wt. 4.7# I.D. 1.995" Set at 3400 Perf. _____ To _____
Gas Pay: From 3366' To 3496' L 3400 xG 0.670 -GL 2278 Bar.Press. 13.2
Producing Thru: Casing _____ Tubing X Type Well Single
Date of Completion: 10-7-35 Packer 3155 Single-Bradenhead-G. G. or G.O. Dual
Reservoir Temp. _____

OBSERVED DATA

Tested Through (Praxair) (Choke) (Meter) Type Taps _____

Flow Data						Tubing Data		Casing Data		Duration of Flow Hr.
No.	(Praxair) (Line) Size	(Choke) (Orifice) Size	Press. psig	Diff. h _w	Temp. °F.	Press. psig	Temp. °F.	Press. psig	Temp. °F.	
SI						<u>373</u>				<u>72</u>
1.	<u>4</u>	<u>0.750</u>	<u>239</u>	<u>6.25</u>	<u>58</u>	<u>349</u>				<u>72</u> <u>24</u>
2.	<u>4</u>	<u>0.750</u>	<u>240</u>	<u>23.04</u>	<u>59</u>	<u>319</u>				<u>24</u>
3.	<u>4</u>	<u>0.750</u>	<u>246</u>	<u>36.00</u>	<u>52</u>	<u>294</u>				<u>24</u>
4.	<u>4</u>	<u>0.750</u>	<u>245</u>	<u>26.49</u>	<u>60</u>	<u>247</u>				<u>24</u>
5.										

FLOW CALCULATIONS

No.	Coefficient (24-Hour)	$\sqrt{h_{wpf}}$	Pressure psia	Flow Temp. Factor F _t	Gravity Factor F _g	Compress. Factor F _{pv}	Rate of Flow Q-MCFPD @ 15.025 psia
1.	<u>3.435</u>	<u>39.69</u>		<u>1.0019</u>	<u>0.9463</u>	<u>1.027</u>	<u>132</u>
2.	<u>3.435</u>	<u>76.35</u>		<u>1.0010</u>	<u>0.9463</u>	<u>1.028</u>	<u>255</u>
3.	<u>3.435</u>	<u>96.56</u>		<u>1.0078</u>	<u>0.9463</u>	<u>1.029</u>	<u>326</u>
4.	<u>3.435</u>	<u>149.38</u>		<u>1.0000</u>	<u>0.9463</u>	<u>1.027</u>	<u>498</u>
5.							

PRESSURE CALCULATIONS

Gas Liquid Hydrocarbon Ratio _____ cf/bbl.
Gravity of Liquid Hydrocarbons _____ deg.
F_c 9.936 (1-e^{-s}) 0.145
Specific Gravity Separator Gas _____
Specific Gravity Flowing Fluid _____
P_c 386.2 P_c² 149.2

No.	P _w P _t (psia)	P _t ²	F _c Q	(F _c Q) ²	(F _c Q) ² (1-e ^{-s})	P _w ²	P _c ² -P _w ²	Cal. P _w	P _w P _c
1.	<u>362.2</u>	<u>131.2</u>	<u>1.31</u>	<u>1.72</u>	<u>0.25</u>	<u>131.5</u>	<u>17.7</u>		
2.	<u>322.2</u>	<u>110.4</u>	<u>2.53</u>	<u>6.40</u>	<u>0.93</u>	<u>111.3</u>	<u>37.9</u>		
3.	<u>307.2</u>	<u>94.4</u>	<u>3.24</u>	<u>10.50</u>	<u>1.52</u>	<u>95.9</u>	<u>53.3</u>		
4.	<u>266.2</u>	<u>67.7</u>	<u>4.98</u>	<u>24.50</u>	<u>3.55</u>	<u>71.3</u>	<u>77.9</u>		
5.									

Absolute Potential: 890 MCFPD; n 0.893
COMPANY Skelly Oil Company
ADDRESS Box 38, Hobbs, New Mexico
AGENT and TITLE _____
WITNESSED _____
COMPANY _____

INSTRUCTIONS

This form is to be used for reporting multi-point back pressure tests on gas wells in the State, except those on which special orders are applicable. Three copies of this form and the back pressure curve shall be filed with the Commission at Box 871, Santa Fe.

The log log paper used for plotting the back pressure curve shall be of at least three inch cycles.

NOMENCLATURE

Q = Actual rate of flow at end of flow period at W. H. working pressure (P_w).
MCF/da. @ 15.025 psia and 60° F.

P_c = 72 hour wellhead shut-in casing (or tubing) pressure whichever is greater.
psia

P_w = Static wellhead working pressure as determined at the end of flow period.
(Casing if flowing thru tubing, tubing if flowing thru casing.) psia

P_t = Flowing wellhead pressure (tubing if flowing through tubing, casing if flowing through casing.) psia

P_f = Meter pressure, psia.

h_w = Differential meter pressure, inches water.

F_g = Gravity correction factor.

F_t = Flowing temperature correction factor.

F_{pv} = Supercompressibility factor.

n = Slope of back pressure curve.

Note: If P_w cannot be taken because of manner of completion or condition of well, then P_w must be calculated by adding the pressure drop due to friction within the flow string to P_t .


SKELLY OIL CO
Coates #3
3-24-36 Lea, N.M.

$$Q_2 = 2150; \text{Log} = 3.332438$$

$$Q_1 = 275; \text{Log} = \underline{2.439332}$$

$$0.893106 = \text{Slope } \pi$$

$P_e^2 - P_w^2$ (Pseudo)

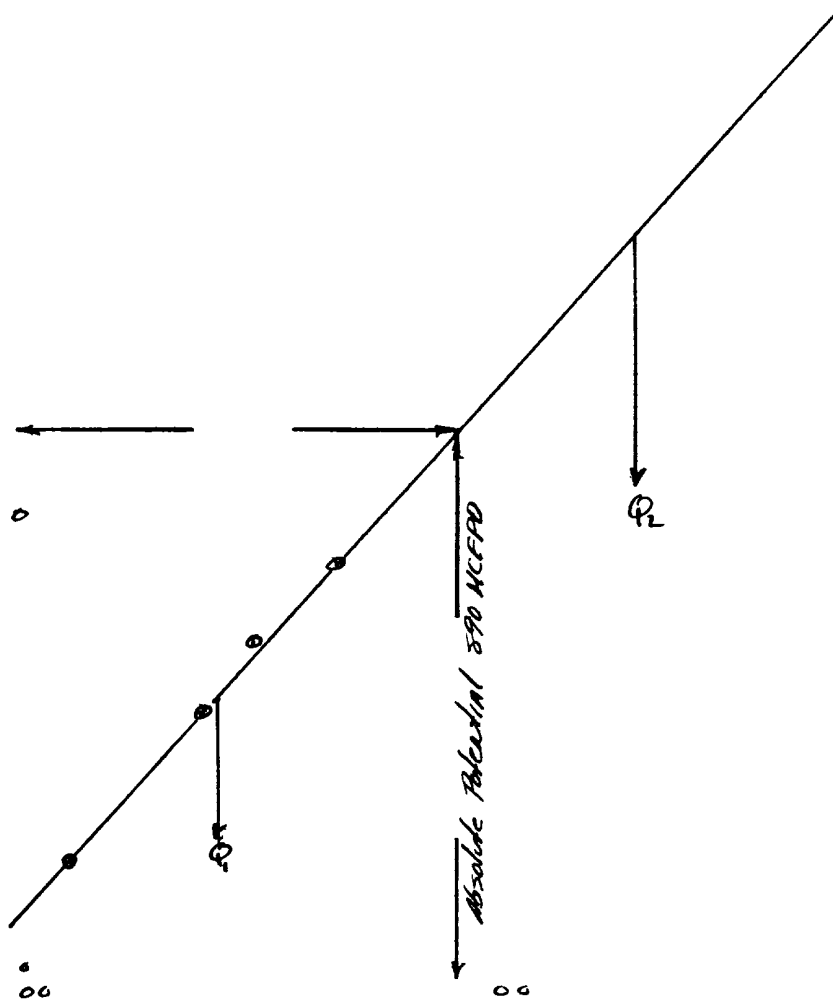

Q-MLFPD-15.025 psia 60°F