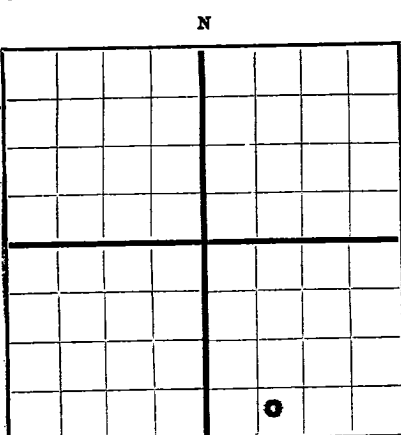



AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Oil Well Remedial Service Box 511 Odessa, Texas
Company or Operator Address
Maggie Dunn Well No. 1 in S₂₄ of Sec. 13, T. 24S
Lease Langlio Hattix Lea County.
R. 36E, N. M. P. M., Field, Lea
Well is 4950 feet south of the North line and 1650 feet west of the East line of Section 13
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Fowler Hair (grass rights) Address Jal, New Mexico
If Government land the permittee is Address
The Lessee is Address
Drilling commenced May 7, 1950 19 Drilling was completed May 22, 1950 19
Name of drilling contractor Oil Well Remedial Service Address Box 511 - Odessa, Texas
Elevation above sea level at top of casing 3315 feet.
The information given is to be kept confidential until not confidential 19

OIL SANDS OR ZONES

No. 1, from 3010 to 3013	No. 4, from 3064 to 3101
No. 2, from 3015 to 3038	No. 5, from 3130 to 3142
No. 3, from 3057 to 3069	No. 6, from 3216 to 3226

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to	feet.
No. 2, from to	feet.
No. 3, from to	feet.
No. 4, from to	feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8"	20 1/2	8	S.H.	304	TP				
5 1/2"	14 1/2	8	How	2985	Float				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8 5/8"	304	125	Halliburton		
8"	5 1/2"	2985	400	Halliburton 2 stage tool		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		NONE				

Results of shooting or chemical treatment NONE

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to TD feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing May 24, 1950 19
The production of the first 24 hours was 48 barrels of fluid of which 100 % was oil; -0 % emulsion; -0 % water; and -0 % sediment. Gravity, Be. 37°
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

~~Oil Well Remedial Service~~ Driller
Oil Well Remedial Service (Contractor) Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 6th day of June, 1950

Notary Public

My Commission expires June 1, 1951

Odessa, Texas 6-6-50
Place Date
Name J. D. Haynes
Position Managing Partner
Representing Oil Well Remedial Service
Company or Operator
Address Odessa, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	150	150	Sand, caliche and gravel
150	250	100	Shale
250	700	450	Redx and grey shale
700	900	200	Red shale
900	1165	265	Red rock
1165	1270	105	Anhydrite
1270	1350	80	Salt
1350	2860	1510	Salt with anhydrite streaks
2860	2952	92	Anhydrite and lime
2952	3002	50	Lime
3002	3010	8	Lime and sand
3010	3013	3	Sand
3013	3015	2	Lime
3015	3038	23	Sand
3038	3057	19	Lime
3057	3069	12	Sand
3069	3084	15	Lime
3084	3101	17	Sand
3101	3130	29	Lime and shale
3130	3142	12	Sand
3142	3216	74	Lime and shale
3216	3228	12	Lime and sand

TD 3228