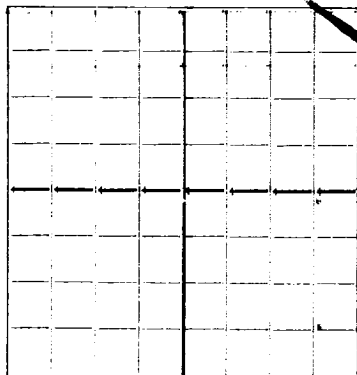


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

AREA 840 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

WESTERN GAS COMPANY

Drawer H, Bennett, New Mexico

Toby "A" Company or Operator

Address

Well No. 1 in NE NE of Sec. 13-24-36, T.

R. N. M. P. M. Cooper Field, Lea County.

Well is 660 feet south of the North line and 660 feet west of the East line of 13

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Geo. W. Toby Address Burkburnett, Texas

If Government land the permittee is Address

The Lessee is Address

Drilling commenced 2-4-42 19 Drilling was completed 3-14-42 19

Name of drilling contractor Carl B. King Drlg. Co. Address Midland, Texas

Elevation above sea level at top of casing 3318-DF feet.

The information given is to be kept confidential until Not confidential. 19

OIL SANDS OR ZONES

No. 1, from 3495-3607 to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13	40#	8	Southchester	211'				Surface
9-5/8	36	8	Smith	2829'	Howco			Salt
7"	24	8	J&L	3430	"			Prod.
2 1/2"	6 1/2	8	J&L	3607				Tubing

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHIRE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17	13	229	350	Howco		
12 1/2	9-5/8	2845	500	"		
8-3/4	7	3444	100	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

(NATURAL)

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3607 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing 3/14/42 19

The production of the first 24 hours was 75 barrels of fluid of which 100 % was oil; %

emulsion; % water; and % sediment. Gravity, Be 38.8

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Fred Wagner Driller Roy Lynch Driller

Guy Severson Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 14th

Bennett, New Mexico, 3/14/42

day of March 1942

Name W. T. Davis

Position Prod. Sup't.

Representing WESTERN GAS COMPANY

Address Drawer H, Bennett, NM.

My Commission expires 10/16/45

Notary Public

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	1165	1165	Caliche, red sd.
1165	1200	35	anhydrite
1200	2820	1620	Anhydrite, salt.
2820	2900	80	anhydrite
2900	2990	90	limestone, anhydrite
2990-	3250	260	sand, limestone.
3250	3350	100	sand, lime, shale
3350	3410	60	limestone
3410	3450	40	sand, limestone
3450	3470	20	sand
3470	3607	137	lime with sand & shale streaks.