


OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELLS

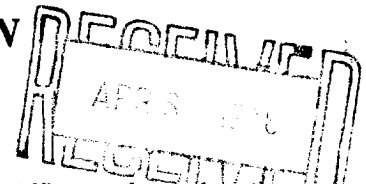

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut-off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below:

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL	X		

Midland, Texas

Place

April 1, 1946

Date

OIL CONSERVATION COMMISSION,
SANTA FE, NEW MEXICO.

Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the Humble Oil & Refining Company S. R. Cooper Well No. 3 in the S/2 of SE/4 of Sec. 14, T. 24-S, R. 36-E, N. M. P. M., Cooper-Jal Field, Lea County.

The dates of this work were as follows: March 25, 1946 to April 1, 1946

Notice of intention to do the work was (~~March 25~~) submitted on Form C-102 on March 6, 1946 19 and approval of the proposed plan was (~~March 25~~) obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Cemented hole with 50 sx. common bulk cement from 3494' to 2794'. From 2794' to 1500' filled hole with mud-laden fluid. Cemented hole with 25 sx. O.K. cement from 1500' to 1100'. From 1100' to 300' filled hole with mud-laden fluid. Cemented hole with 25 sx. cement from 300' to 130'. From 130' to 25' filled hole with mud-laden fluid. Cemented hole with 25 sx. from 25' to surface. Shot 9-5/8" casing at 500', 400', 300', 200' and 100'. Recovered 100' of 9-5/8" casing. Set 4" marker in top of surface plug.

Witnessed by _____ Name _____ Company _____ Title _____

Subscribed and sworn before me this 4th

day of April, 19 46

Winnie Mae Ferguson
Notary Public

My commission expires 6-1-47

I hereby swear or affirm that the information given above is true and correct

Name E. Gallagher

Position Division Chief Clerk

Representing Humble Oil & Refining Company
Company or Operator

Address Box 1600, Midland, Texas

Remarks:

APPROVED

APR 5 1946

Roy Underwood
Oil & Gas Division Name

Title

