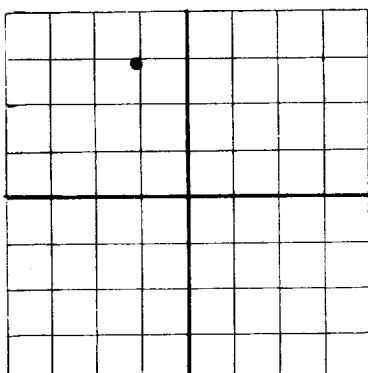
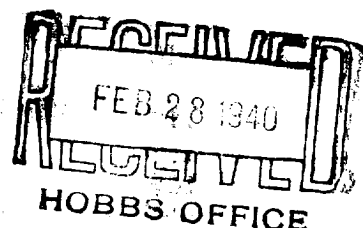


N

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES  
LOCATE WELL CORRECTLYDUPLICATE  
WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (!). SUBMIT IN TRIPLICATE.

P.H. Selden  
Company or OperatorHobbs, N.M.  
AddressFlora  
Lease

Well No. 1

In NE NW

of Sec. 6

T. 23

R. 37 N. M. P. M. Shelly Field, Lea County.

Well is 660 feet south of the North line and 3300 feet west of the East line of 38

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Address

Drilling commenced Jan. 2, 19 40 Drilling was completed Feb. 24, 19 40

Name of drilling contractor J.C. Glover Address Eunice, N.M.

Elevation above sea level at top of casing 3334 feet.

The information given is to be kept confidential until 19

## OIL SANDS OR ZONES

No. 1, from 3567 to 3572 No. 4, from 3640 to 3652

No. 2, from 3575 to 3585 No. 5, from to

No. 3, from 3615 to 3622 No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 40 to 110 feet. 70

No. 2, from 138 to 160 feet. 22

No. 3, from 710 to 786 feet. 76

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
15 1/2	70	8	S H	118	Guide				Surface
12 1/2	80	8	S H	424	"				Shutoff
10	40	8	S H	708	"				"
8	32	8	S H	1156	"				"
7	3448 20	8	Haw	3448	"				Production

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
18	15 1/2	118	100	p & p	10 lb.	Hole full
8	7	3448	250	p & p	10 lb.	" "

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		S H C	545 lbs	2/25/40	3567-3670	3670

Results of shooting or chemical treatment Increased oil flow from 15 bbls in 24 hrs to 100 bbls in 24 hrs.

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 3660 feet, and from feet to feet

## PRODUCTION

Put to producing 2/27 19 40

The production of the first 24 hours was 100 barrels of fluid of which 100 % was oil; emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in. 1000

## EMPLOYEES

Jay D. Cravens Driller P. Boswell Driller  
H.J. Whitaker Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 27

day of Feb. 19 40

Notary Public

My Commission expires May 3, 1943.

Eunice, N.M. 2/27/40

Name P.H. Selden

Position Owner

Representing P.H. Selden

Address Hobbs, N.M.

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	10	10	Cellar
10	40	30	Shale
40	110	70	Sand
110	138	28	Shale
138	160	22	Sand
160	710	570	Shale
710	786	76	Sand
786	1152	366	Shale
1152	1200	48	Anhydrite
1200	2520	1320	Salt, Shale, Anhydrite
2520	2634	114	Anhydrite
2634	2651	17	Br. Lime
2651	3444	793	Anhy. & Lime
3444	3572	22	Lime
3572	3572	0	Sand
3572	3575	3	Lime
3575	3585	10	Sand
3585	3615	30	Lime
3615	3622	7	Sand
3622	3638	16	Sandy lime
3638	3640	2	Lime
3640	3652	12	Sand
3652	3660	8	Lime
3660	3672	12	Sandy Lime
3672	3680	8	Lime