


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

1956 MAR 23 AM 9:11

WELL RECORD

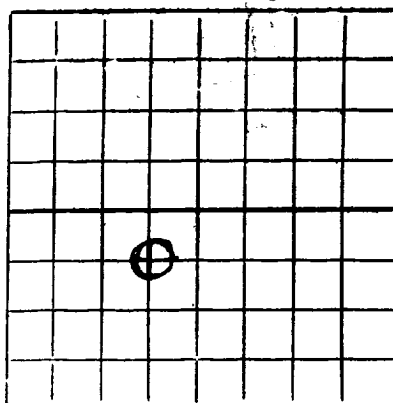

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

Resler and Sheldon

(Company or Operator)

Kelly State

(Lease)

Well No. 1, in NE 1/4 of SW 1/4, of Sec. 16, T. 23, R. 37, NMPM.

Penrose-Skelley

Pool,

Lea

County.

Well is 1980 feet from south line and 1980 feet from west line

of Section 16. If State Land the Oil and Gas Lease No. is E-4958

Drilling Commenced 2-15, 1956. Drilling was Completed 2-27, 1956

Name of Drilling Contractor Carper Drilling Company

Address Artesia, New Mexico

Elevation above sea level at Top of Tubing Head. The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3508 to 3532 No. 4, from to
No. 2, from 3544 to 3560 No. 5, from to
No. 3, from 3584 to 3604 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 3638 to 3654 feet
No. 2, from to feet
No. 3, from to feet
No. 4, from to feet

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8 5/8	24	New	257				
5 1/2	14	New	3675				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11	8 5/8	257	200	Halliburton		
7 7/8	5 1/2	3675	400	Halliburton		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Thru perforations 3638-54', 13,000 lbs. sand in 6500 gallons lease crude oil w/ adomite. Bridge plug at 3610' and squeezed w/ 93 sacks. Perforated 3584-3604' and Fraced 20,000 lbs. sand in 10,000 gallons in adomite. Perforated 3508-32' and 3544-60' and sand-fraced 20,000 lbs. sand in 10,000 gallons lease crude oil w/ adomite.
result of Production Stimulation 60 BPOD

Depth Cleaned Out 3610

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 3675 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing 3-25, 1956
OIL WELL: The production during the first 24 hours was 60 barrels of liquid of which 100% was oil; % was emulsion; % water; and % was sediment. A.P.I. Gravity 38
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

T. Anhy 1040
T. Salt
B. Salt
T. Yates 2610
T. 7 Rivers
T. Queen 3410
T. Grayburg 3560
T. San Andres
T. Glorieta
T. Drinkard
T. Tubbs
T. Abo
T. Penn
T. Miss

T. Devonian
T. Silurian
T. Montoya
T. Simpson
T. McKee
T. Ellenburger
T. Gr. Wash
T. Granite
T.
T.
T.
T.
T.
T.
T.

Northwestern New Mexico

T. Ojo Alamo
T. Kirtland-Fruitland
T. Farmington
T. Pictured Cliffs
T. Menefee
T. Point Lookout
T. Mancos
T. Dakota
T. Morrison
T. Penn
T.
T.
T.
T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	749		red beds				
749	935		red bed anhydrite				
935	1160		" " "				
1160	2420		salt and anhydrite				
2420	3407		anhydrite				
3407	3561		anhydrite and lime				
3561	3675		lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED.

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

March 26, 1956

(Date)

Company or Operator Reaser and Sheldon
Name

Address Garber Bldg. Artesia, N. Mex.
Position or Title Partner