


N.

(Revised 7/1/53)
(Form C-105)

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

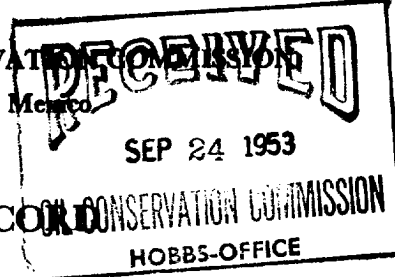

WELL RECORD

DUPLICATE

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTuplicate.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Skelly Oil Company

E. L. Steeler

(Company or Operator)

(Lease)

Well No. 4, in SW 1/4 of SW 1/4, of Sec. 17, T. 23S, R. 37E, NMPM.

Penrose Skelly Pool, Lea County.

Well is 860' feet from South line and 660' feet from West line

of Section 17. If State Land the Oil and Gas Lease No. is -

Drilling Commenced August 15, 1953 Drilling was Completed Sept. 15, 1953

Name of Drilling Contractor Cactus Drilling Company

Address San Angelo, Texas

Elevation above sea level at Top of Tubing Head 3316' DF The information given is to be kept confidential until

Not confidential, 19

OIL SANDS OR ZONES

No. 1, from 3404' to 3630' No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8-5/8"	24#	New	1134'	Float			Surface
5-1/2"	15# & 17#	"	3399'	"			Production

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8"	1140'	400	Halliburton		
7-7/8"	5-1/2"	3404'	200	"		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Sandfraced open hole section 3404-3630' with 6000 Gals.

Result of Production Stimulation After sandfrace treatment well flowed 211 Bbls. oil in 24 hours thru

3/4" choke. T.P. 60% GOR 1700/l. Before sandfrace treatment well bailed 19 Bbls. oil in

24 hours. Depth Cleaned Out

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

Rotary tools were used from 0 feet to 1140 feet, and from _____ feet to _____ feet.
Cable tools were used from 1140 feet to 3630 feet, and from _____ feet to _____ feet.

Sept. 23, 1953 (Date)

Company or Operator Skelly Oil Company

Name J. J. Dumas

Address Box 38 - Hobbs, New Mexico

Position or Title Dist. Supt.