


CURRENT WELLBORE

2/28/96

Elev. = 3357'

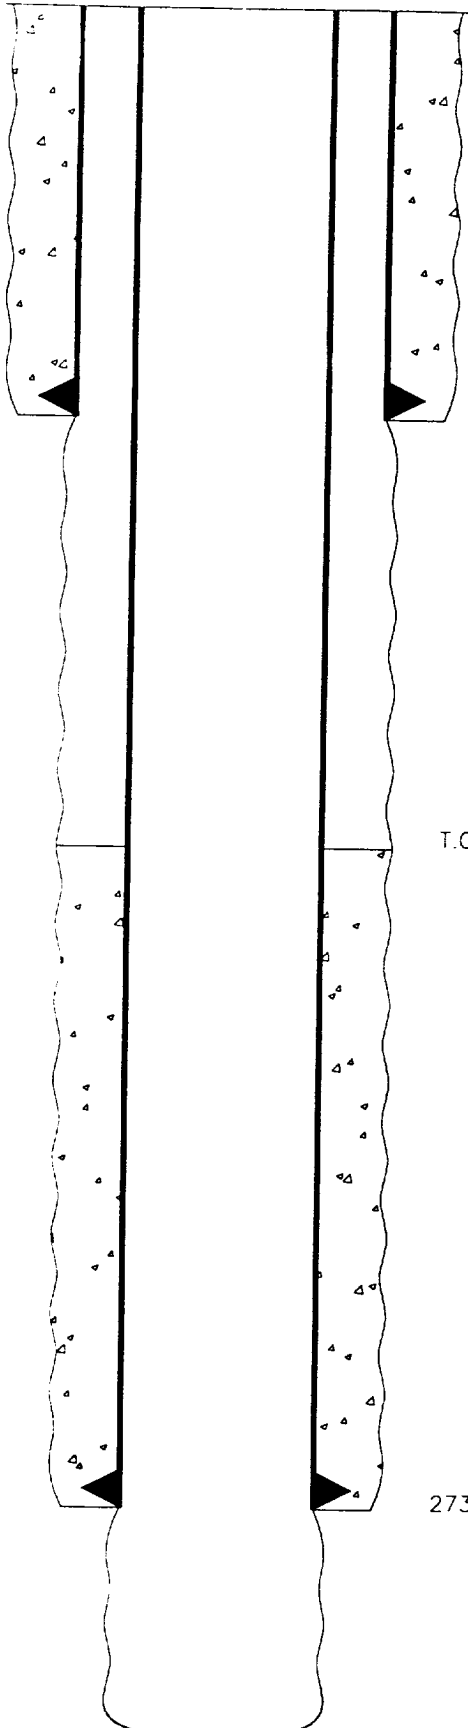

1209' - 7 5/8" Casing. Cemented w/500 sxs. Circulated.

T.O.C. @ 1397' (TEMP. SUR.)

2736' - 5 1/2" , 14# Casing. Cemented w/500 Sxs

T.D. @ 3478'

CONOCO, INC.

STEVENS "B" #16

650' FSL & FWL


Sec. 18, T-23S, R-37E

Lea County, NM

PROPOSED P & A

2/28/96

Elev. = 3357'

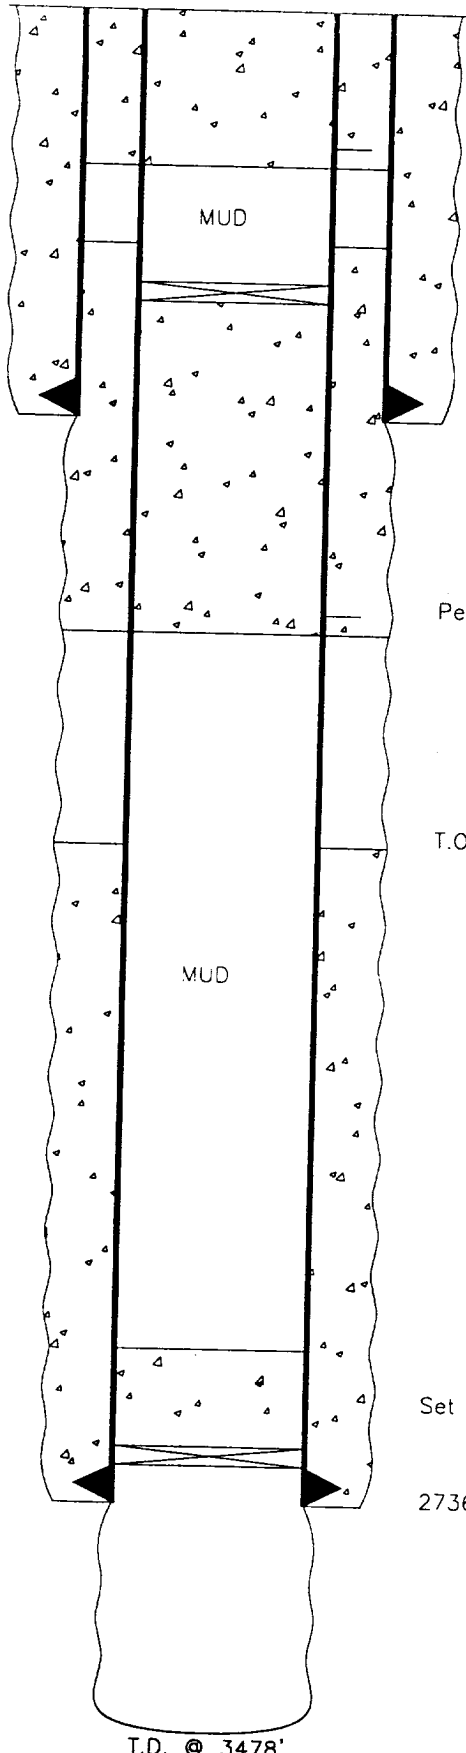

Perforate @ 350' and circulate 70 sxs cement to surface.

Set Cement Retainer @ 1150' and squeeze 100 sxs cement.

1209' - 7 5/8" Casing. Cemented w/500 sxs. Circulated.

Perforate @ 1260'

T.O.C. @ 1397' (TEMP. SUR.)

Set C.I.B.P. @ 2650' w/25 sxs cement on top.

2736' - 5 1/2" , 14# Casing. Cemented w/500 Sxs

T.D. @ 3478'

CONOCO, INC.

STEVENS "B" #16

1650' FSL & FWL

Sec. 18, T-23S, R-37E

Lea County, NM