

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANITARY	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

SUNDY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR OPERATIONS TO BE PERFORMED ON A WELL IN A DIFFERENT RESERVOIR. USE APPLICATION FOR PERMIT TO DRILL (FORM C-101) FOR SUCH OPERATIONS.)		5a. Indicate Type of Lease State ☐ Fee ☒
1. ☒ OIL WELL ☐ GAS WELL ☐ OTHER		5. State Oil & Gas Lease No.
2. Name of Operator Atlantic Richfield Company		7. Unit Agreement Name
3. Address of Operator P. O. Box 1710, Hobbs, New Mexico 88240		6. Form or Lease Name E. L. Steeler WN
4. Location of Well UNIT LETTER P 660 FEET FROM THE South LINE AND 660 FEET FROM THE East LINE, SECTION 19 TOWNSHIP 23S RANGE 37E N.M.P.M.		9. Well No. 1
15. Elevation (Show whether DE, RT, GR, etc.) 3316' GR		10. Field and Pool, or Wildcat Langlie Mattix 7RQn
12. County Lea		

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐ TEMPORARILY ABANDON ☐ PULL OR ALTER CASING ☐ OTHER ☐	PLUG AND ABANDON ☒ CHANGE PLANS ☐ OTHER ☐	REMEDIAL WORK ☐ COMMENCE DRILLING OPNS. ☐ CASING TEST AND CEMENT JOB ☐ OTHER ☐	ALTERING CASING ☐ PLUG AND ABANDONMENT ☐ OTHER ☐

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

TD 3822', PBD 3634'. Completed in 7Rivers Queen OH interval 3509-3634'. This well has been temporarily abandoned since 9/1/73. The well is uneconomical to produce.
 13" OD 40# csg set @ 193', cmtd w/200 sx.
 9-5/8" OD 36# csg set @ 2686', cmtd w/500 sx.
 7" OD 24# H-40 csg set @ 3509', cmtd w/125 sx.
 Top of salt section @ 1300'.
 Propose to plug & abandon in the following manner:
 1. Rig up, install BOP & POH w/completion assy.
 2. RIH w/7" CIBP, set BP @ 3450'. Dump 35' Cl C cmt on top.
 3. Spot 100' cmt plug across top of salt @ 1300' inside 7" OD csg using 25 sx Cl C cmt cont'g 4% gel. Tag top of cmt. Spot heavy salt gelled mud cont'g 5 gals/100 bbls C-198 between all cmt plugs. PERF. 7" @ 1300' & PLACE 100' INSIDE & OUTSIDE OF PIPE.
 4. Spot 10 sx Cl C cmt @ surface, install regulation dry hole marker. Clean & level location.

THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.


SIGNED Jerry S. ... Dist. L. Supt.	TITLE Dist. Drlg. Supt.	DATE 11/1/77
APPROVED BY _____ CONDITIONS OF APPROVAL, IF ANY:	TITLE _____	DATE _____

Expires 5/1/78

RECEIVED

11977

OIL CONSERVATION COMMISSION
HOBBS, N. M.

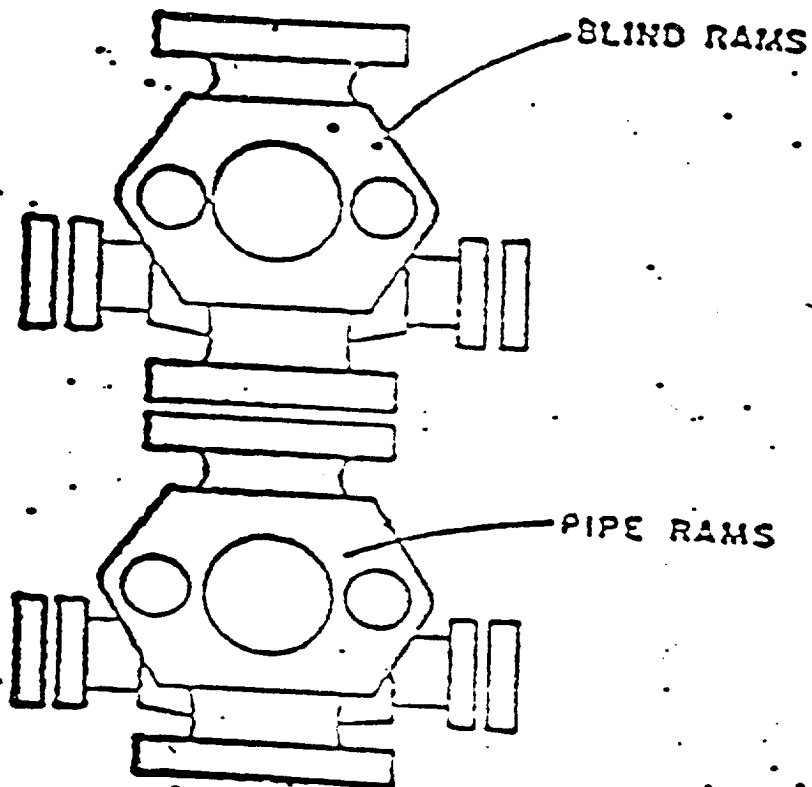

ATLANTIC RICHFIELD COMPANY
Blow Out Preventer Program

Lease Name E. L. Steeler WN

Well No. 1

Location 660' FSL & 660' FEL

Sec 19, T23S, R37E, Lea County

BOP to be tested before installed on well and will be maintained in good working condition during drilling. All wellhead fittings to be of sufficient pressure to operate in a safe manner.

RECEIVED

1 1977

OIL CONSERVATION COMM.
HOBBS, N. M.