


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

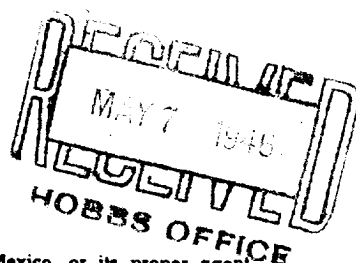

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

AREA 640 ACRES
LOCATE WELL CORRECTLY

R. Olsen Oil Company

Oklahoma City, Oklahoma

Company of Operator

Address

Steeler

Well No.

1

in

SW¹

of Sec.

20

T.

238

Lease

R. 37E N. M. P. M. Wildcat Field, Lea County.

Well is 4620 feet south of the North line and 4620 feet west of the East line of Section 20

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Bert Steeler Address Jal

If Government land the permittee is Address

The Lessee is Bert Steeler Address

Drilling commenced January 25 1946 Drilling was completed March 12 1946

Name of drilling contractor Olsen-Blount Address Oklahoma City, Okla

Elevation above sea level at top of casing 3309 feet D.F.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
9-5/8	36#	8	Nat'l	682'	T.P.				
7	20#	8	"	3457'	Float				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/2	9-5/8	694'	250	Plug	8.8	
8-3/4	7	3465'	250	Plug	9.1	

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3710 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing Dry & Abandoned 19

The production of the first 24 hours was None barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Arthur Stine Driller Ray Ford Driller

Clayton Barnes Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 6th

day of May 1946

Notary Public

My Commission expires Oct. 24, 1949

Hobbs, New Mexico April 24, 1946

Name Charles P. Miller

Position Agent

Representing R. Olsen Oil Company

Address Oklahoma City, Okla.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	36	36	Surface
36	216	180	Sand
216	340	124	Sand and gypsum
340	495	155	Red beds
495	700	205	Red beds and shells
700	800	100	Anhydrite & broken shells
800	900	100	Anhydrite and sand
900	990	90	Broken anhydrite
990	1083	93	Anhydrite and shells
1083	1148	65	Red beds & broken anhydrite shells
1148	1256	108	Anhydrite. (Top anhy. 1150' by samples)
1256	1298	42	Anhydrite and gypsum
1298	2393	1095	Salt and anhydrite
2393	2420	27	Anhydrite
2420	2476	56	Salt
2476	2581	105	Salt and anhydrite
2581	2700	119	Anhydrite
2700	2788	88	Anhydrite and lime
2788	2888	100	Lime
2888	2906	18	Anhydrite and lime
2906	2927	21	Lime
2927	2940	13	Anhydrite and lime
2940	2955	15	Lime-anhydrite-sand
2955	2997	42	Anhydrite
2997	3078	81	Anhydrite and lime
3078	3522	444	Lime
3522	3530	8	Lime and anhydrite
3530	3586	56	Lime
3586	3600	14	Sandy lime
3600	3668	68	Lime
3668	3708	40	Sandy lime
3708	3710	2	Lime

Total Depth 3710'