


MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

Notice of Intention to Drill

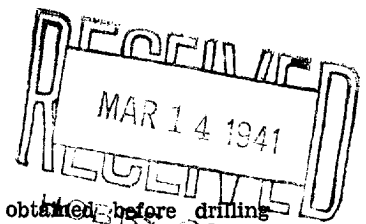

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

March 12, 1941

OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico.
Gentlemen:

Place

Date

You are hereby notified that it is our intention to commence the drilling of a well to be known as

SKELLY OIL COMPANY

J. C. Johnson

Well No.

1

in CSW NW

Company or Operator

Lease

of Sec. 20, T. 23S, R. 37E, N. M. P. M., Skelly Field, Lea County

N.

The well is 1980 feet (N) (S) of the North line and 660 feet

(E) of the West line of Section 20 -

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. , Assignment No.

If patented land the owner is J. C. Johnson

Address Eunice, New Mexico

If government land the permittee is

Address

The lessee is SKELLY OIL COMPANY

Address Tulsa, Oklahoma

AREA 640 ACRES
LOCATE WELL CORRECTLY

We propose to drill well with drilling equipment as follows: Cable tools from top to total depth (Spudder). Contractor to be - R. G. Patillo, Monahans, Tex.

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows:

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing OD	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
18"	16"	70#	S.H.	115'	Cemented	100
14 1/2"	13"	50#	S.H.	400'	Landed	
12 1/2"	10-3/4"	40#	S.H.	720'	Landed	
10"	8-5/8"	32#	S.H.	1100'	Cemented	150
8 1/2"	7"	20#	New	3575'	Cemented	250

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3450 feet.

Additional information: In cementing the 16" OD csg. the cement shall be circulated back to bottom of cellar. Halliburton Process shall be used in cementing all strings, and sufficient time shall be allowed for cement to thoroughly set before drilling plug.

Approved _____, 19____
except as follows: MAR 14 1941

Sincerely yours,

SKELLY OIL COMPANY

Company or Operator

By

Position

District Supt.

Send communication regarding well to

Name

Skelly Oil Co. - Drawer D

Address

Hobbs, New Mexico

OIL CONSERVATION COMMISSION,

By

Title

OIL & GAS INSPECTOR

