


Santa Fe, New Mexico

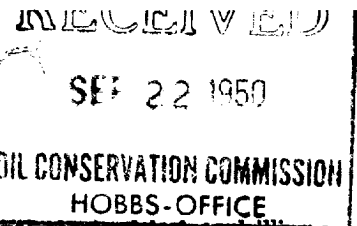


NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico
Place9-21-50
DateOIL CONSERVATION COMMISSION,
Santa Fe, New Mexico,

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as _____

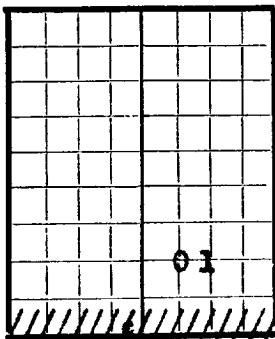Gulf Oil Corp., Fort Worth Division
Company or OperatorE. Hunt well No. 1 in SW SE
Leaseof Sec. 26, T. 23S, R. 37E, N. M., P. M., Langlie-Mattwood, Lea County.
N

AREA 640 ACRES

LOCATE WELL CORRECTLY

The well is 660 feet (N.) ~~SW~~ of the Southline and 1980 feet
~~SW~~ (W.) of the East line of Section 26

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. _____ Assignment No. _____

If patented land the owner is E. C. HillAddress Bunice, New Mexico

If government land the permittee is _____

Address _____

The lessee is Gulf Oil CorporationAddress Fort Worth, Texas

We propose to drill well with drilling equipment as follows: _____

Cable Tools - Donnelly Drilling Co.

The status of a bond for this well in conformance with Rule 35 of the General Rules and Regulations of the Commission is as follows: _____

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
15"	13 3/8"	48#	New	300	Cemented	300
12 1/4"	10 3/4"		Used	850	Landed	
10"	8 5/8"		Used	1250	Landed	
8"	7"		New	3400	Cemented	750

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3300 feet.

Additional information: 10 3/4" and 8 5/8" casing will be pulled. A 7" OD Halliburton DV multiple stage cementing tool will be set in the Rustler anhydrite at approximately 1150'. Approximately 500 sacks cement will be used on first stage and 250 sacks cement on second stage.

Approved _____, 19____

except as follows: SEP 22 1950

Sincerely yours,

Gulf Oil Corporation
Company or OperatorBy Chas TaylorPosition Area Production Superintendent
Send communications regarding well to:Name C. F. TaylorAddress Box 1667, Hobbs, New Mexico

OIL CONSERVATION COMMISSION,

By Ray GarknaughTitle Oil & Gas Inspector

