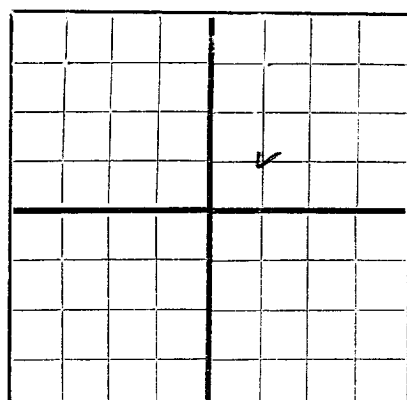


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

R. G. Clay Box 296 Hobbs, New Mexico
Company or Operator
Cowden C Well No. **5** in **SW NE 1/4** of Sec. **31**, T. **23S**
Lease
R. **37E**, N. M. P. M., **Langlie-Mattix** Field, **Lea** County.
Well is **1980** feet south of the North line and **1980** feet west of the East line of **Sec 31**
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is **J. P. Combest (Surface only)** Address **Jal, New Mexico**
If Government land the permittee is Address
The Lessee is **R. G. Clay** Address
Drilling commenced **2/20** 19**50** Drilling was completed **3/10/** 19**50**
Name of drilling contractor **Clay & Gackle** Address **Hobbs, New Mexico**
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from **3543** to **3652** No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
7 5/8	26	8	Natl.	1205	Guide				
5 1/2	14	8	"	3480	Guide & Float				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
4"	Time Bomb	S.O.W.E. # 1	280 Qts.	3/	3543-3652	3652

Results of shooting or chemical treatment **Well flowed 51 Bbls. in 24 hrs. before shot and 103 Bbls. in 24 hrs. after shot.**

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **3652** feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing **3/23** 19**50**
The production of the first 24 hours was **103** barrels of fluid of which **100** % was oil; %
emulsion; % water; and % sediment. Gravity, Be **36**
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

J. P. Buchanan Driller **Ed Seabourn** Driller
C. L. Edwards Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **2** day of **March**, 19**50**
H. G. Hinkle
Notary Public

My Commission expires **1-2-1953**

Hobbs, New Mexico **3/23/50**
Place Date
Name **H. G. Hinkle**
Position **Partner**
Representing **R. G. Clay**
Company or Operator
Address **Box 296 Hobbs, New Mexico**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Surface & caliche
20	220	200	Sand & gravel
220	1165	945	Red bed
1165	1260	90	Anhydrite
1260	2760	1500	Salt
2760	2900	140	Brown lime
2900	3020	120	Lime & anhyr.
3020	3280	260	Yates sand
3280	3545	260	Lime
3543	3652	109	Queens sand