


Form 9-33a
(March 1942)

(SUBMIT IN TRIPLICATE)

Land Office Las Cruces

DUPLICATE

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

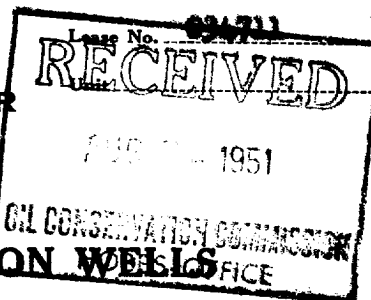

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

DATE NO. 2

May 22nd, 1951

Well No. 2 is located 1980 ft. from N line and 1979 ft. from W line of sec. 35

NE 1/4 SW 1/4 Sec. 35
(1/4 Sec. and Sec. No.)

23-S
(Twp.)

37-E
(Range)

NMPK
(Meridian)

Langlie-Mattix
(Field)

Lee
(County or Subdivision)

New Mexico
(State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

It is our intention to drill a well with cable tools at the above location to a depth of approximately 3,700 feet, unless commercial production is encountered at a lesser depth. All casing will be cemented in accordance with methods approved by the United States Geological Survey and any other special requirements will be complied with. The following casing pattern will be used:

13-3/8" casing will be set at approximately 300 feet, cemented with 300 sacks.

7" CD casing will be set at approximately 3,400, cemented with 150% of the volume of cement required to bring the cement to 200 feet above the top of the salt.

If the cement behind the 7" casing should circulate, no temperature survey will be run. If the cement does not circulate, a temperature survey will be run and if necessary the 7" casing will be perforated and recemented to bring the top of cement at least 200 feet above the top of salt.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Carter Foundation Production Company

Address P. O. Box 1688

Kermit, Texas

By Ray E. Carter
Title Field Manager

