


N

NEW MEXICO OIL CONSERVATION COMMISSION

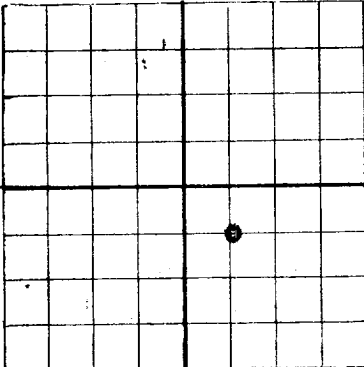

AREA 640 ACRES
LOCATE WELL CORRECTLY

Santa Fe, New Mexico

DUPLICATE

WELL RECORD

RECEIVED
OCT 14 1940
HOBBBS OFFICE

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Kripp-Flaherty Oil Corporation, P.O.Box 1752, Midland, Texas

Company or Operator

Address

Moberley

Well No.

1

in NW 1/4 SE 1/4 of Sec.

21

T. 26 -S

Lease

37 E

N. M. P. M.

JAL

Field,

LEA

County.

Well is 3300 feet south of the North line and 1980 feet west of the East line of Section 21

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is Moberley - 1301819 Address

The Lessee is Address

Drilling commenced July 3rd 1940 Drilling was completed September 26 1940

Name of drilling contractor Clark & Cooper Address McCamey, Texas

Elevation above sea level at top of casing 2976 feet.

The information given is to be kept confidential until No reservation 19

OIL SANDS OR ZONES

No. 1, from 3170' to 3254' No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 520' to 565' feet. 460'
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
15 1/2	NA	NA	.	58					Surface
12 1/2				480					Water-cavings
10				683					Shut off water
8 1/2				1183					Cem. 250 Sks.
7" OD				3070					Oil String " 200 "

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Nitro	280 Qts	9/27/40	3254	Still cleaning

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 0 feet to 3254 feet, and from feet to feet

PRODUCTION

Put to producing 19
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

L. C. Steele

O. J. Napier

Driller

Driller

Cooper

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this

Place

Date

day of 19

Name

Position

Notary Public

Representing

Company or Operator

My Commission expires

Address

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	50	50	Sand & Gyp
50	135	85	Sand - - - 15 1/2" casing set 58", 15 Sks Cem
135	220	85	Sand & Red Shale
220	300	80	Red bed
300	320	20	Red shale
320	340	20	Gray sand (Hard)
340	360	20	Red sand
360	460	100	Gray sand
460	505	45	Green sandy shale - - 470' of 12 1/2" set.
505	555	50	Red shale & sandy, - - Water at 520'
555	565	10	Red sand
565	617	52	Red shale
617	620	3	Gray conglomerate
620	1090	370	Red rock - - 683' of 10" set
1090	1100	10	Anhy & lime
1100	1117	17	Lime
1117	1125	8	Anhy & Red rock
1125	1135	10	Salt
1135	1145	10	Slate
1145	1215	70	Anhy & Gray lime - - - 1183'5" of 8 1/2" set
1215	1355	140	Salt & Anhy
1355	1370	15	Red shale
1370	1410	40	Anhy-Salt & Red shale
1410	1605	195	Red rock & Anhy
1605	1635	30	Anhydrite
1635	1770	135	Anhy & salt
1770	2110	340	Potash-Salt & Anhy
2110	2325	115	Salt & Anhy
2325	2375	50	Anhydrite
2375	2395	20	Anhy & Salt
2395	2700	305	Salt and Anhydrite
2700	2740	40	Anhydrite (Base of Salt 2740')
2740	2950	210	Gray lime
2950	2992	42	Black shale
2992	3015	23	Yates sand
3015	3035	20	Broken lime-Blue shale, (50,000' gas 3020'-3025')
3035	3055	20	Broken lime & shale
3055	3135	80	Lime, (Gas at 3062',)
3135	3144	9	Lime (Hard & fine) (1,000,000' gas 3130'-3134')
3144	3166	22	Lime
3166	3170	4	Brown Lime (Top pay 3170')
3170	3187	17	Sand-Brown lime (Show oil, 3170'-3187')
3187	3190	3	Gas & Oil, (In 18 Hrs. filled up & made head
3190	3200	10	Sand
3200	3210	10	Sand (soft)
3210	3215	5	Sand (Hard)
3215	3225	10	Oil sand
3225	3236	11	Lime hard
3236	3240	4	Gray sandy lime (Small show gas 3238'-3240')
3240	3254	14	Lime (Gray) T.D.