
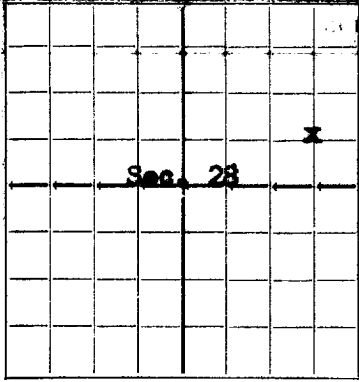


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

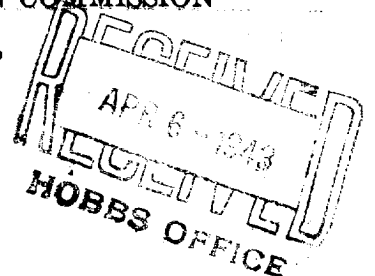

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Anderson-Prichard Oil Corporation Box 1697, Hobbs, New Mexico
Company or Operator Address

State 28 Well No. 1 in SE/4 NE/4 of Sec. 28, T. 26S
Lease

R. 37E, N. M. P. M., Rhodes Field, Lea County.

Well is 1980 feet south of the North line and 660 feet west of the East line of Section 28

If State land the oil and gas lease is No. B-7606 Assignment No. _____

If patented land the owner is _____, Address _____

If Government land the permittee is _____, Address _____

The Lessee is The Ohio Oil Company, Address Box 3128, Houston, Texas.

Drilling commenced 3-4 19 43. Drilling was completed 3-30 19 43

Name of drilling contractor Uscan Drilling Co., Address Oklahoma City, Oklahoma.

Elevation above sea level at top of casing 2981 feet.

The information given is to be kept confidential until _____ 19 _____

OIL SANDS OR ZONES

No. 1, from 3278' to 3303' No. 4, from _____ to _____

No. 2, from _____ to _____ No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to _____ feet.

No. 2, from _____ to _____ feet.

No. 3, from _____ to _____ feet.

No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
8-5/8"	28#	8 R Thd	SS	574	Larkin			Surface Pipe
5 1/2"	15#	8 R Thd	ss	3139	Larkin			Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WEIGHT SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8"	574	175	Halliburton		
7-7/8"	5 1/2"	3139	650	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____

Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
3	4 x 20	L.N.G.	60	3-31-43	3278 to	3303'
1	4 x 10	SN .G.	5	3-31-43	3303'	

Results of shooting or chemical treatment After cleaning out well, produced 5 BOPH for 5 hour test; before shot, well produced 16 BO in 6 hours.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3323 feet, and from _____ feet to _____ feet

Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing 3-30 19 43

The production of the first 5 hours was 25 barrels of fluid of which 100 % was oil; None % emulsion; None % water; and None % sediment. Gravity, Be 36

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Eugene Blount, Driller J. C. Hill, Driller

Hugh West, Driller _____, Driller _____

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 3rd

Hobbs, New Mexico 4-3-43
Place Date

day of April, 19 43

Name Jan P. Jagers

Notary Public

Position District Clerk

My Commission expires 3/3/45

Representing Anderson-Prichard Oil Corporation
Company or Operator

Address Box 1697, Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	1087	1087	Red Bed
1087	1295	208	Anhydrite & Red Rock
1295	1370	75	Red Bed
1370	1460	90	Anhydrite
1460	1638	178	Red Bed - Salt
1638	1817	179	Anhydrite
1817	2790	973	Salt
2790	2898	108	Anhydrite & Gypsum
2898	3185	287	Lime
3185	3278	93	Lime - Sand Breaks
3278	3303	25	Oil Sand
3303	3323	20	Lime