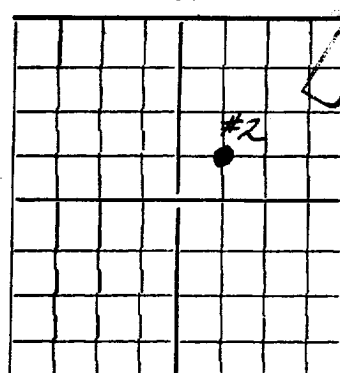


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

WELL RECORD

Anderson-Prichard Oil Corporation

Box 1697, Hobbs, New Mexico.

State 28 "A"

Company or Operator

Well No. 2

in SW/4 of NE/4 of Sec. 28

Address

T. 26S

R. 37E

N. M. P. M.

Rhodes

Field, Lea

County.

Well is 1980 feet south of the North line and 1980 feet west of the East line of Section 28

If State land the oil and gas lease is No. B-7606

Assignment No.

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is Ohio Oil Company,

Address

Box 3128, Houston, Texas.

Drilling commenced 7-17-

19 43

Drilling was completed 8-11

19 43

Name of drilling contractor Rhodes Drilling Co.

Address Box 239, Mims Bldg., Abilene, Texas.

Elevation above sea level at top of casing 3079 feet.

The information given is to be kept confidential until not confidential

19

OIL SANDS OR ZONES

No. 1, from none

to

No. 4, from

to

No. 2, from

to

No. 5, from

to

No. 3, from

to

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from none

to

feet.

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

CASING RECORD

| SIZE | WEIGHT PER FOOT | THREADS PER INCH | MAKE | AMOUNT | KIND OF SHOE | CUT & FILLED FROM | PERFORATED FROM TO | PURPOSE |
|--------|-----------------|------------------|--------|--------|--------------|-------------------|--------------------|--------------|
| 8-5/8" | 28# | 8 Rd thd | M-40SS | 587' | None | | | Surface Pipe |
| 5 1/2" | 15# | 8 Rd thd | M-40SS | 3170' | Larkin | | | Oil String |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

MUDDING AND CEMENTING RECORD

| SIZE OF HOLE | SIZE OF CASING | WHERE SET | NO. SACKS OF CEMENT | METHOD USED | MUD GRAVITY | AMOUNT OF MUD USED |
|--------------|----------------|-----------|---------------------|-------------|-------------|--------------------|
| 11" | 8-5/8" | 587 | 188 | Halliburton | | |
| 7-7/8" | 5 1/2" | 3157 | 650 | Halliburton | | |
| | | | | | | |
| | | | | | | |

PLUGS AND ADAPTERS

Heaving plug—Material

Length

Depth Set

Adapters—Material

Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

| SIZE | SHELL USED | EXPLOSIVE OR CHEMICAL USED | QUANTITY | DATE | DEPTH SHOT OR TREATED | DEPTH CLEANED OUT |
|------|------------|----------------------------|----------|--------|-----------------------|-------------------|
| 4" | 4"x10' | L.N.G. | 70 | 8-8-43 | 3247 - 3284' | 3284' |
| | | | | | | |
| | | | | | | |

No results

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3350 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing Dry Hole, 19

The production of the first 24 hours was None barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours None Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Dan Tucker

Driller

S. L. White

Driller

J. D. Harrell

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Hobbs, New Mexico August 23, 1943.

Subscribed and sworn to before me this

day of 19

Name

District Clerk

Position

Anderson-Prichard Oil Corporation

Representing

Box 1697, Hobbs, New Mexico.

My Commission expires 3/3/45

Address

FORMATION RECORD

| FROM | TO | THICKNESS IN FEET | FORMATION |
|------|------|----------------------|----------------------|
| 0 | 538 | 538 | Red Beds |
| 538 | 552 | 14 | Sand |
| 552 | 1160 | 608 | Red Beds |
| 1160 | 1293 | 133 | Anhydrite & Red Rock |
| 1293 | 2834 | 1541 | Salt & anhydrite |
| 2834 | 2982 | 148 | Lime |
| 2982 | 3010 | 28 | Sand and sandy Lime |
| 3010 | 3080 | 70 | Lime |
| 3080 | 3106 | 26 | Sand |
| 3106 | 3179 | 73 | Lime |
| 3179 | 3183 | 4 | Dolomite |
| 3183 | 3193 | 10 | Red Rocks |
| 3193 | 3205 | 12 | Lime |
| 3205 | 3214 | 9 | Shale |
| 3214 | 3248 | 34 | Lime |
| 3248 | 3272 | 24 | Sand & Lime |
| 3272 | 3319 | 47 | Lime |
| 3319 | 3350 | 31 | Sand & Shale T. D. |