

Submit 3 Copies
to Appropriate
District Office

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-103
Revised 1-1-89

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO. 30 - 025 - 12367
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. B - 9312
7. Lease Name or Unit Agreement Name MEXICO L
8. Well No. 3
9. Pool name or Wildcat DOLLARHIDE FUSSELMAN

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"
(FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: OIL WELL ☒ GAS WELL ☐ OTHER ☐	2. Name of Operator Texaco Exploration and Production Inc.
3. Address of Operator P. O. Box 730 Hobbs, NM 88240	4. Well Location Unit Letter B : 660 Feet From The NORTH Line and 1980 Feet From The EAST Line Section 5 Township 25-S Range 38-E NMPM LEA
10. Elevation (Show whether DF, RKB, RT, GR, etc.) 3168' DF	

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data	
NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK ☐	REMEDIAL WORK ☐
TEMPORARILY ABANDON ☐	ALTERING CASING ☐
PULL OR ALTER CASING ☐	COMMENCE DRILLING OPNS. ☐
OTHER: ☐	PLUG AND ABANDONMENT ☐
	CASING TEST AND CEMENT JOB ☐
	OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

- 1) Inform NMOCD 24 hours prior to commencement of plugging.
- 2) MIRU. Install BOP and rig up work string.
- 3) GIH and tag retainer at 3601'. Fill casing with salt gel mud; 10# brine-25# gel/ Bbl. Pump 15 sx plug, class 'C' cement, from 3100'-3200' across intermediate casing shoe, or set CIBP at 3150' with 35' cement.
- 4) Pump 15 sx from 2550'-2450 across base of salt section. WOC. Tag plug. Pump 15 sx from 1216'-1116'. WOC. Tag plug. Pump 15 sx from 310'-210'. pump 10 sx from 100' to surface.
- 5) POH. Fill casing annulus from surface with 1" tubing if necessary.
- 6) Cut off wellhead and install marker. Clean location and restore surface.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Robert McNaughton TITLE PRODUCTION ENGINEER DATE 5-28-92
TYPE OR PRINT NAME ROBERT McNAUGHTON TELEPHONE NO. 397-0428

(This space for State Use)

Orig. Signed by
Paul Kautz
Geologist

APPROVED BY _____ TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY:


THE COMPLETION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE CUM TO BE APPROVED

JUN 01 '92

PRODUCING WELL DATA SHEET

PO-113
(3/92)

OPERATOR: Texaco Exploration & Production Inc WELL: Mexico L #3
FOOTAGE LOCATION: 1980 FEL, 660 FNL Sec./Twn/Rng: Unit B, Sec 5, T-25-S, R-38-E
Annulus, holes in casing squeezed with 750 sx, 1-79. Lea County, New Mexico

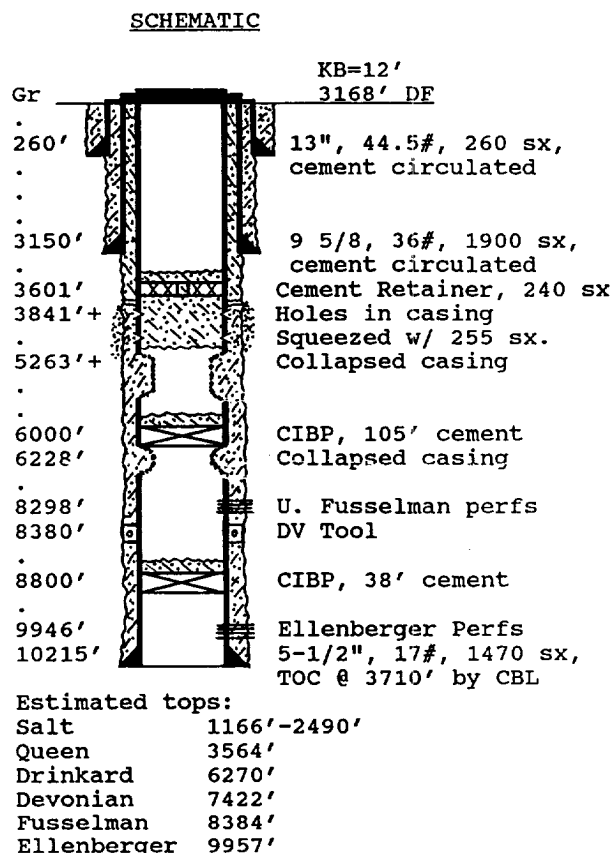


TABULAR DATA

<u>Surface Casing:</u>	Set at: <u>260'</u>
Size <u>13", 44.5#</u>	Cemented with <u>260</u> sx.
TOC <u>surface</u>	' determined by <u>circulated</u>
Hole Size <u>18"</u>	Comp. Date <u>4-19-52</u>
<u>Intermediate casing:</u>	Set at: <u>3150'</u>
Size <u>9-5/8", 36#</u>	Cemented with <u>1900</u> sx.
TOC <u>surface</u>	' determined by <u>circulated</u>
Hole Size <u>12-1/4"</u>	
<u>Production Casing:</u>	Set at: <u>10,215'</u>
Size <u>5 1/2, 17#</u>	Cemented with <u>1470</u> sx.
TOC <u>3710/surf.*</u>	determined by <u>CBL/Squeeze</u>
Hole Size <u>7 7/8,</u>	DV tool set at <u>8380'</u>
<u>Completion Intervals:</u>	
<u>8298' to 8309'</u>	Upper Fusselman Perfs
<u>9946' to 10,070'</u>	Ellenberger Perfs
<u> ' to '</u>	
<u> ' to '</u>	

Recommended Plug and Abandon Procedure

PO-113
(3/92)

OPERATOR: Texaco Exploration & Production Inc WELL: Mexico L #3
FOOTAGE LOCATION: 1980 FEL, 660 FNL Sec./Twn/Rng: Unit B, Sec 5, T-25-S, R-38-E
Lea County, New Mexico

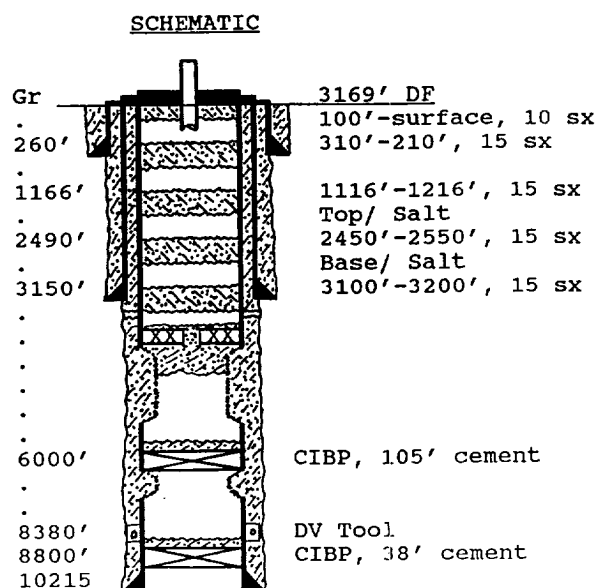

TABULAR DATA

<u>Surface Plugs:</u>	
Size <u>100'-surface</u>	Cemented with <u>10</u> sx.
<u>310'-210'</u>	<u>15</u> sx.
Class 'C' Cement, 1.32 ft ³ / sx	
<u>Intermediate Plugs:</u>	
Size <u>1116'-1216'</u>	Cemented with <u>15</u> sx.
<u>2450'-2550'</u>	<u>15</u> sx
<u>3100'-3200'</u>	<u>15</u> sx
Class 'C' Cement, 1.32 ft ³ / sx	
<u>Producing Zone Plugs:</u>	
Size <u>none</u>	Cemented with <u> </u> sx.

MAY 20 1992