

OIL CONSERVATION DIVISION

P.O. Box 1990, Hobbs, NM 88240

DISTRICT II

P.O. Box Drawer DD, Artesia, NM 88210

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

WELL API NO.	3002512387
5. Indicate Type of Lease	STATE ☒ FEE ☐
6. State Oil / Gas Lease	B-9312-5

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well: OIL WELL ☒ GAS WELL ☐ DRY ☐ OTHER ☐	7. Lease Name or Unit Agreement Name WEST DOLLARHIDE DRINKARD UNIT
b. Type of Completion: NEW WELL ☐ WORKOVER ☒ DEEPEN ☐ PLUG BACK ☐ DIFF RES. ☐ OTHER HORIZONTAL ☐	8. Well No. 88
2. Name of Operator TEXACO EXPLORATION & PRODUCTION INC.	9. Pool Name or Wildcat DOLLARHIDE TUBB DRINKARD
3. Address of Operator 15 SMITH ROAD, MIDLAND, TX 79705	
4. Well Location BHL: SEC 5, 25S 38E, 478 + NL, 2562 + DL	

Unit Letter A	667	Feet From The NORTH	Line and 500	Feet From The EAST	Line
Section 5	Township 25S	Range 38E	NMPM	LEA	COUNTY

10. Date Spudded 2/27/2002	11. Date T.D. Reached 3/20/2002	12. Date Compl. (Ready to Prod.) 4/1/2002	13. Elevations (DF & RKB, RT, GR, etc.) 3148' KB	14. Elev. Csghead
15. Total Depth 8970'	16. Plug Back T.D.	17. If Mult. Compl. How Many Zones?	18. Intervals Drilled By Rotary Tools Cable Tools	
19. Producing Interval(s), of this completion - Top, Bottom, Name 6279-6285' TUBB DRINKARD				20. Was Directional Survey Made YES
21. Type Electric and Other Logs Run N/A				22. Was Well Cored No

CASING RECORD (Report all Strings set in well)

CASING SIZE	WEIGHT LB./FT.	DEPTH SET	HOLE SIZE	CEMENT RECORD	AMOUNT PULLED
			NO CHANGE		

LINER RECORD

TUBING RECORD

SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	SIZE	DEPTH SET	PACKER SET
					2 7/8"	6401'	

26. Perforation record (interval, size, and number) 6279-6285'	27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC. DEPTH INTERVAL 6279-6285' AMOUNT AND KIND MATERIAL USED 71,000 GALS 20% HCL 10,500 GALS SCALE INHIB 26,000 GALS WF 130 SLICK
---	--


PRODUCTION

Date First Production 4/10/2002	Production Method (Flowing, gas lift, pumping - size and type pump) PUMPING (SIZE - N/A)	Well Status (Prod. or Shut-in) PROD					
Date of Test 4-10-02	Hours tested 24 HRS	Choke Size	Prod'n For Test Period	Oil - Bbl. 110	Gas - MCF 55	Water - Bbl. 325	Gas - Oil Ratio
Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate	Oil - Bbl.	Gas - MCF	Water - Bbl.	Oil Gravity - API -(Corr.)	

29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD	Test Witnessed By
--	-------------------

30. List Attachments NOTARIZED DEVIATIONS
--

31. I hereby certify that the information on both sides of this form is true and complete to the best of my knowledge and belief.	
SIGNATURE J. Denise Leake	TITLE Regulatory Specialist
DATE 5/1/2002	Telephone No. 915-687-7375

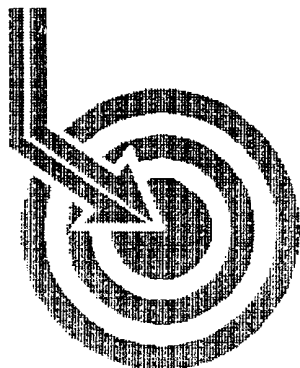

Scientific Drilling



TEXACO E & P INC.


Field: West Dollarhide Drinkard
Site: Lea County, NM
Well: WDDU #88H
Wellpath: DH - Job #32D0302086
Survey: 3/11/02-3/19/02

This survey is correct to the best of my knowledge
and is supported by actual field data.

Deborah S. Bynum.....Company Representative

Notorized this date 17th of April, 2002.

Deborah S. Bynum
Notary Signature
County of Midland
State of Texas



Scientific Drilling International

Survey Report

Company: TEXACO E & P INC.
Field: West Dolarhide Drinkard
Site: Lea County, NM
Well: WDDU #88H
Wellpath: VH - Job #32K0302085

Date: 4/17/2002 **Time:** 11:12:27 **Page:** 1
Co-ordinate(NE) Reference: Site: Lea County, NM, True North
Vertical (TVD) Reference: SITE 0.0 above Mean Sea Level
Section (VS) Reference: Well (0.0E,0.0N,274.7Azi)
Survey Calculation Method: Minimum Curvature

Survey: 3/11/02
 KSRG 0'-6259'

Start Date: 4/17/2002

Company: Scientific Drilling Internatio
Tool: Keeper

Engineer: Jeff Cossey

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	ClsD ft	ClsA deg	DLS deg/100ft
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.0	0.00	0.00
100.0	0.13	75.62	100.0	-0.1	0.0	0.1	0.1	75.62	0.13
200.0	0.26	70.00	200.0	-0.4	0.1	0.4	0.5	72.81	0.13
300.0	0.30	54.83	300.0	-0.8	0.4	0.9	0.9	67.16	0.08
400.0	0.15	49.66	400.0	-1.1	0.6	1.2	1.3	63.01	0.15
500.0	0.18	83.01	500.0	-1.4	0.7	1.4	1.6	63.86	0.10
600.0	0.22	65.36	600.0	-1.7	0.8	1.8	1.9	65.53	0.07
700.0	0.26	43.70	700.0	-2.0	1.0	2.1	2.3	63.45	0.10
800.0	0.28	43.79	800.0	-2.3	1.4	2.4	2.8	60.18	0.02
900.0	0.32	42.35	900.0	-2.6	1.8	2.8	3.3	57.49	0.04
1000.0	0.38	47.39	1000.0	-3.0	2.2	3.2	3.9	55.56	0.07
1100.0	0.39	42.07	1100.0	-3.4	2.7	3.7	4.5	53.96	0.04
1200.0	0.46	49.72	1200.0	-3.9	3.2	4.2	5.3	52.88	0.09
1300.0	0.91	64.06	1300.0	-4.9	3.8	5.2	6.5	54.05	0.48
1400.0	1.24	63.90	1400.0	-6.5	4.6	6.9	8.3	56.28	0.33
1500.0	1.41	65.35	1499.9	-8.5	5.6	9.0	10.6	58.10	0.17
1600.0	1.39	63.39	1599.9	-10.6	6.7	11.2	13.0	59.27	0.05
1700.0	1.26	54.82	1699.9	-12.5	7.8	13.2	15.3	59.28	0.24
1800.0	1.18	56.43	1799.9	-14.2	9.0	15.0	17.5	58.83	0.09
1900.0	1.20	59.17	1899.8	-15.8	10.1	16.7	19.5	58.72	0.06
2000.0	1.29	54.83	1999.8	-17.5	11.3	18.5	21.7	58.54	0.13
2100.0	1.38	54.33	2099.8	-19.3	12.7	20.4	24.0	58.16	0.09
2200.0	1.41	54.66	2199.8	-21.2	14.1	22.4	26.5	57.82	0.03
2300.0	1.49	59.96	2299.7	-23.2	15.5	24.5	29.0	57.78	0.16
2400.0	1.51	57.48	2399.7	-25.3	16.8	26.8	31.6	57.86	0.07
2500.0	1.52	54.27	2499.7	-27.4	18.3	29.0	34.3	57.71	0.09
2600.0	1.38	60.38	2599.6	-29.4	19.7	31.1	36.8	57.67	0.21
2700.0	1.32	56.35	2699.6	-31.3	20.9	33.1	39.1	57.71	0.11
2800.0	1.11	51.84	2799.6	-32.9	22.1	34.8	41.3	57.54	0.23
2900.0	0.78	39.88	2899.6	-34.0	23.3	36.0	42.9	57.13	0.38
3000.0	0.75	32.42	2999.5	-34.7	24.3	36.8	44.1	56.52	0.10
3100.0	0.85	8.25	3099.5	-35.0	25.6	37.3	45.2	55.48	0.35
3200.0	0.87	6.43	3199.5	-35.1	27.1	37.4	46.2	54.09	0.03
3300.0	0.85	1.68	3299.5	-35.1	28.6	37.6	47.2	52.70	0.07
3400.0	0.84	348.44	3399.5	-34.9	30.1	37.4	48.0	51.22	0.20
3500.0	0.91	336.71	3499.5	-34.3	31.5	37.0	48.6	49.55	0.19
3600.0	1.01	332.04	3599.5	-33.4	33.0	36.2	49.0	47.66	0.13
3700.0	0.99	329.70	3699.5	-32.5	34.5	35.4	49.5	45.69	0.05
3800.0	0.75	337.34	3799.5	-31.7	35.9	34.7	49.9	44.03	0.27
3900.0	0.75	336.25	3899.4	-31.1	37.1	34.2	50.4	42.66	0.01
4000.0	0.62	341.28	3999.4	-30.5	38.2	33.7	51.0	41.45	0.14
4100.0	0.48	349.34	4099.4	-30.2	39.1	33.5	51.5	40.56	0.16
4200.0	0.36	0.92	4199.4	-30.1	39.9	33.4	52.0	39.98	0.15
4300.0	0.31	2.78	4299.4	-30.0	40.4	33.4	52.5	39.58	0.05
4400.0	0.36	351.53	4399.4	-30.0	41.0	33.4	52.9	39.16	0.08
4500.0	0.47	4.53	4499.4	-29.9	41.7	33.4	53.5	38.66	0.14
4600.0	0.49	5.40	4599.4	-29.9	42.6	33.5	54.2	38.17	0.02
4700.0	0.37	30.72	4699.4	-30.0	43.3	33.7	54.8	37.88	0.22

Scientific Drilling International

Survey Report

Company: TEXACO E & P INC.
Field: West Dollarhide Drinkard
Site: Lea County, NM
Well: WDDU #88H
Wellpath: DH - Job #32D0302086

Date: 4/17/2002 **Time:** 11:17:53 **Page:** 1
Co-ordinate(NE) Reference: Site: Lea County, NM, True North
Vertical (TVD) Reference: SITE 0.0 above Mean Sea Level
Section (VS) Reference: Well (0.0E,0.0N,274.7Azi)
Survey Calculation Method: Minimum Curvature

Survey: 3/11/02-3/19/02
 MWD 6280'-8970'

Start Date: 4/17/2002

Company: SDI w/MWD
Tool: MWD

Engineer: Lamb/Hendrix

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	ClsD ft	ClsA deg	DLS deg/100ft
6259.0	0.20	192.55	6258.4	-26.8	34.2	29.6	45.3	40.90	0.00
6280.0	0.20	192.55	6279.4	-26.8	34.2	29.6	45.2	40.94	0.00
6327.0	17.40	240.80	6325.6	-20.9	30.6	23.4	38.6	37.42	36.74
6359.0	29.40	246.60	6355.0	-9.9	25.1	12.0	27.9	25.51	38.14
6391.0	40.80	243.70	6381.1	6.0	17.4	-4.6	18.0	345.04	36.00
6422.0	51.60	239.90	6402.5	24.8	6.7	-24.3	25.2	285.53	35.93
6453.0	62.60	236.90	6419.3	45.7	-6.9	-46.4	46.9	261.54	36.40
6485.0	75.30	236.30	6430.8	69.1	-23.3	-71.3	75.0	251.89	39.73
6514.0	87.30	235.30	6435.2	91.4	-39.4	-94.9	102.8	247.46	41.52
6546.0	92.20	239.50	6435.3	116.9	-56.6	-121.9	134.4	245.08	20.17
6577.0	92.80	245.30	6434.0	143.1	-71.0	-149.3	165.3	244.58	18.79
6609.0	93.10	247.10	6432.3	171.2	-83.9	-178.6	197.3	244.84	5.70
6640.0	95.60	248.60	6430.0	198.7	-95.5	-207.2	228.1	245.25	9.40
6672.0	95.20	252.90	6427.0	227.9	-106.0	-237.3	259.9	245.92	13.44
6703.0	95.40	252.80	6424.1	256.5	-115.1	-266.7	290.5	246.66	0.72
6734.0	97.10	256.50	6420.7	285.5	-123.3	-296.5	321.1	247.42	13.07
6765.0	98.10	260.60	6416.6	315.0	-129.4	-326.6	351.3	248.39	13.50
6798.0	98.60	260.90	6411.8	346.7	-134.6	-358.8	383.2	249.43	1.76
6829.0	97.50	263.80	6407.5	376.7	-138.7	-389.2	413.2	250.38	9.92
6861.0	94.90	264.40	6404.0	407.9	-142.0	-420.8	444.2	251.36	8.34
6892.0	95.60	263.50	6401.2	438.3	-145.2	-451.5	474.3	252.17	3.67
6924.0	97.80	262.40	6397.5	469.4	-149.1	-483.1	505.6	252.84	7.68
6955.0	98.00	262.40	6393.2	499.4	-153.2	-513.5	535.9	253.39	0.65
6986.0	94.20	263.30	6389.9	529.5	-157.0	-544.1	566.3	253.90	12.59
7018.0	92.90	263.30	6387.9	560.9	-160.8	-575.8	597.8	254.40	4.06
7049.0	91.30	263.00	6386.8	591.2	-164.5	-606.6	628.5	254.83	5.25
7081.0	92.80	263.50	6385.6	622.6	-168.2	-638.3	660.1	255.24	4.94
7113.0	92.00	263.60	6384.3	653.9	-171.8	-670.1	691.8	255.62	2.52
7144.0	92.00	264.60	6383.2	684.4	-175.0	-700.9	722.4	255.98	3.22
7176.0	91.40	264.50	6382.3	715.9	-178.0	-732.8	754.1	256.34	1.90
7208.0	88.30	264.20	6382.4	747.4	-181.2	-764.6	785.8	256.67	9.73
7239.0	87.70	264.30	6383.4	777.8	-184.3	-795.4	816.5	256.96	1.96
7270.0	87.50	264.60	6384.7	808.3	-187.3	-826.3	847.2	257.23	1.16
7302.0	87.30	264.70	6386.2	839.8	-190.3	-858.1	878.9	257.50	0.70
7334.0	89.40	263.40	6387.1	871.2	-193.6	-889.9	910.7	257.73	7.72
7365.0	88.80	263.90	6387.6	901.7	-197.0	-920.7	941.5	257.92	2.52
7397.0	89.30	263.80	6388.1	933.1	-200.4	-952.5	973.4	258.12	1.59
7428.0	88.60	262.50	6388.7	963.4	-204.1	-983.3	1004.2	258.27	4.76
7460.0	88.80	262.40	6389.4	994.7	-208.3	-1015.0	1036.2	258.40	0.70
7491.0	88.30	262.80	6390.2	1025.0	-212.3	-1045.7	1067.1	258.52	2.07
7523.0	86.20	261.80	6391.7	1056.2	-216.6	-1077.4	1099.0	258.63	7.27
7555.0	86.10	262.30	6393.9	1087.4	-221.0	-1109.0	1130.8	258.73	1.59
7586.0	85.50	262.20	6396.2	1117.6	-225.2	-1139.7	1161.7	258.82	1.96
7618.0	86.70	260.90	6398.3	1148.7	-229.9	-1171.2	1193.6	258.90	5.52
7650.0	87.20	260.80	6400.0	1179.7	-235.0	-1202.8	1225.5	258.95	1.59
7681.0	88.50	264.20	6401.2	1210.0	-239.0	-1233.5	1256.4	259.03	11.73
7713.0	89.10	266.00	6401.9	1241.5	-241.7	-1265.4	1288.2	259.18	5.93
7745.0	91.00	269.20	6401.8	1273.3	-243.1	-1297.3	1319.9	259.39	11.63

Scientific Drilling International

Survey Report

Company: TEXACO E & P INC.
Field: West Dollarhide Drinkard
Site: Lea County, NM
Well: WDDU #88H
Wellpath: DH - Job #32D0302086

Date: 4/17/2002 **Time:** 11:17:53 **Page:** 2
Co-ordinate(NE) Reference: Site: Lea County, NM, True North
Vertical (TVD) Reference: SITE 0.0 above Mean Sea Level
Section (VS) Reference: Well (0.0E,0.0N,274.7Azi)
Survey Calculation Method: Minimum Curvature

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	ClsD ft	ClsA deg	DLS deg/100ft
7775.0	92.60	271.80	6400.9	1303.2	-242.8	-1327.3	1349.3	259.63	10.17
7807.0	94.30	279.90	6399.0	1335.1	-239.6	-1359.1	1380.0	260.00	25.82
7838.0	96.80	288.20	6396.0	1365.5	-232.1	-1389.0	1408.2	260.51	27.84
7871.0	94.60	296.90	6392.7	1396.7	-219.5	-1419.3	1436.1	261.21	27.07
7903.0	92.90	298.20	6390.6	1426.1	-204.7	-1447.6	1462.0	261.95	6.68
7934.0	93.50	298.00	6388.9	1454.5	-190.2	-1474.9	1487.1	262.65	2.04
7966.0	100.50	298.00	6385.0	1483.7	-175.3	-1502.9	1513.1	263.35	21.87
7998.0	103.00	297.50	6378.5	1512.5	-160.7	-1530.6	1539.0	264.01	7.96
8029.0	98.60	299.90	6372.6	1540.3	-146.0	-1557.3	1564.2	264.64	16.10
8061.0	98.50	299.00	6367.9	1569.0	-130.5	-1584.9	1590.2	265.29	2.80
8092.0	95.20	304.80	6364.2	1596.4	-114.2	-1611.0	1615.0	265.94	21.41
8123.0	90.90	309.80	6362.5	1622.4	-95.5	-1635.6	1638.4	266.66	21.25
8155.0	91.40	309.00	6361.9	1648.7	-75.2	-1660.3	1662.0	267.41	2.95
8187.0	91.80	303.10	6361.0	1676.0	-56.4	-1686.2	1687.1	268.09	18.47
8218.0	91.70	302.00	6360.1	1703.4	-39.7	-1712.3	1712.7	268.67	3.56
8249.0	91.70	301.70	6359.1	1731.0	-23.3	-1738.6	1738.8	269.23	0.97
8281.0	90.40	303.50	6358.5	1759.2	-6.1	-1765.6	1765.6	269.80	6.94
8313.0	91.40	303.80	6358.0	1787.2	11.6	-1792.2	1792.2	270.37	3.26
8343.0	89.50	305.50	6357.8	1813.2	28.7	-1816.9	1817.1	270.90	8.50
8375.0	87.90	303.60	6358.5	1840.9	46.8	-1843.2	1843.8	271.46	7.76
8407.0	89.10	298.30	6359.4	1869.6	63.3	-1870.6	1871.7	271.94	16.98
8438.0	90.90	291.10	6359.4	1898.7	76.2	-1898.8	1900.3	272.30	23.94
8470.0	90.80	282.90	6358.9	1929.9	85.6	-1929.4	1931.3	272.54	25.62
8501.0	91.20	281.80	6358.4	1960.6	92.2	-1959.6	1961.8	272.69	3.78
8533.0	90.90	282.00	6357.8	1992.4	98.8	-1990.9	1993.4	272.84	1.13
8564.0	90.00	282.80	6357.5	2023.1	105.5	-2021.2	2024.0	272.99	3.88
8596.0	92.00	284.50	6357.0	2054.7	113.0	-2052.3	2055.4	273.15	8.20
8627.0	92.00	281.50	6355.9	2085.4	120.0	-2082.5	2085.9	273.30	9.67
8659.0	92.50	282.30	6354.6	2117.1	126.6	-2113.8	2117.6	273.43	2.95
8690.0	91.50	282.60	6353.5	2147.8	133.2	-2144.0	2148.2	273.56	3.37
8722.0	88.40	278.80	6353.6	2179.6	139.2	-2175.5	2179.9	273.66	15.32
8753.0	88.50	279.40	6354.4	2210.5	144.1	-2206.1	2210.8	273.74	1.96
8784.0	91.40	281.40	6354.4	2241.3	149.7	-2236.5	2241.6	273.83	11.36
8816.0	93.10	282.80	6353.2	2273.0	156.4	-2267.8	2273.2	273.94	6.88
8848.0	92.10	282.00	6351.7	2304.7	163.2	-2299.0	2304.8	274.06	4.00
8879.0	92.30	281.50	6350.5	2335.4	169.6	-2329.4	2335.5	274.16	1.74
8911.0	92.40	281.90	6349.2	2367.2	176.0	-2360.7	2367.2	274.26	1.29
8970.0	92.40	281.90	6346.8	2425.6	188.2	-2418.4	2425.7	274.45	0.00



Scientific
Drilling


FIELD: West Donahide Drinkard
Site: Lea County, NM
Well: WDDU #88H
Wellpath: DH - Job #32D0302086
Survey: 3/11/02-3/19/02



All Angles Relative
To True North

True North: 0.00
Magnetic North: 0.00

South(-)/North(+) [500ft/in]

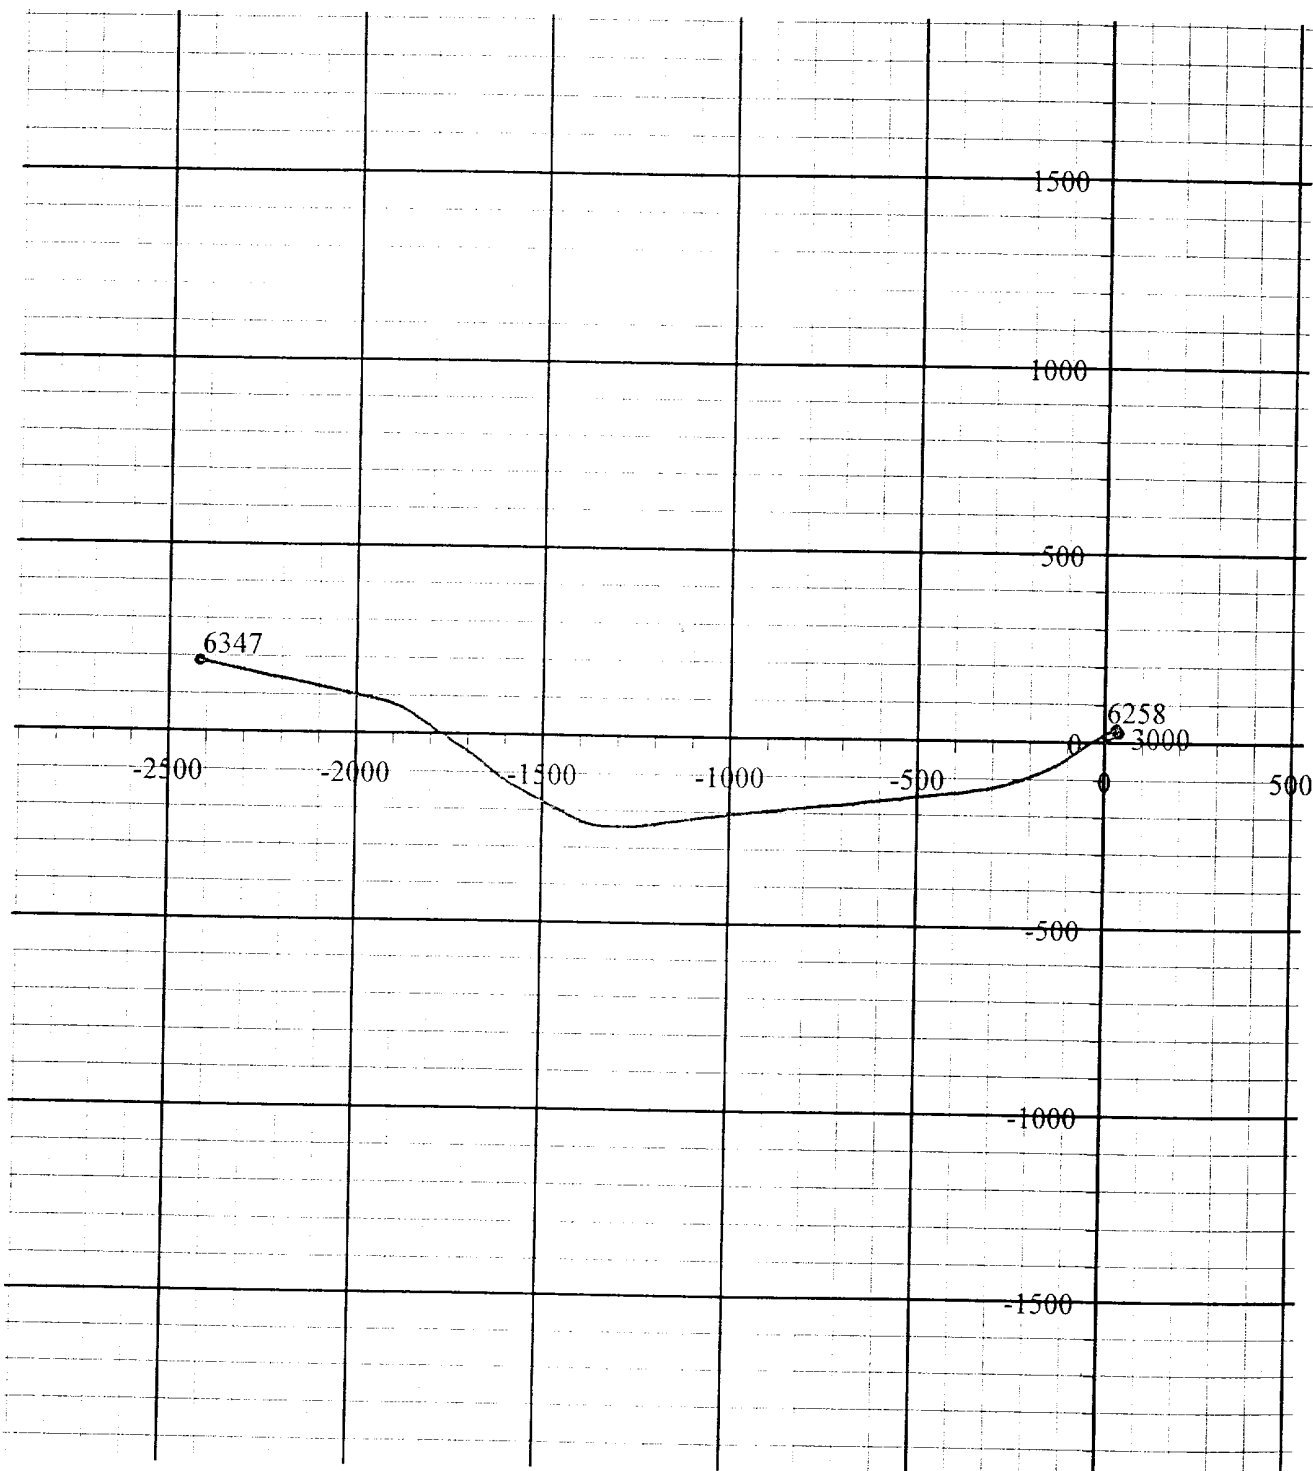

West(-)/East(+) [500ft/in]



April 18, 2002

Chevron-Texaco Corporation
P.O. Box 1150
Midland, TX 79702

Attention: Regulatory Compliance Dept.

Re: Chevron-Texaco Corporation
W.D.D.U. #88-H
Lea County, New Mexico
Key Energy 117

Dear Sir or Madam:

Please find attached (2) copies of MWD Survey Report for well referenced above for your records.

Regards,

A handwritten signature in black ink, appearing to read 'Clyde Cormier', with a stylized flourish at the end.

Clyde Cormier
VP-Engineering

Enclosure



MWD SERVICES, INC.

FIELD SURVEY CALCULATIONS

DATE PRINTED: 03/19/02
 COMPANY: CHEVRON-TEXACO CORP.
 LOCATION: LEA COUNTY, NM
 FILE NAME: 02025.SRV
 CALCULATION MODEL: MINIMUM CURVATURE METHOD
 GRID CONVERGENCE: N/A MAGN. DEC.: 8.52E
 COMMENTS: SURVEY #0 = TIE IN SURVEY
 SURVEY #84 = STRAIGHT LINE PROJECTED SURVEY TO BIT DEPTH
 SURVEYS CORRECTED TO TRUE NORTH REFERENCE

MWD. REP.: G. HENDRIX
 WELL NAME: W.D.D.U. #88-H
 RIG: KEY ENERGY 117
 VERT. SEC. DIR.: N 85.34 W
 DEPTH DATUM: RKB
 MAGN. TO MAP CORR.: 8.52 E

===== MWD SURVEY PROGRAM

Ver: 3.10 PC (4-Jun-87)

Date: 3/19/2002 Time: 17:27: 4
 Filename: "02025.SRV" Description: "W.D.D.U. #88-H"
 Target Coordinates: 207.0 N 2540.0 W Target TVD: 6350.000
 Using Minimum Curvature Method.

S #	MEASURED DEPTH (feet)	DRIFT ANGLE (deg)	DRIFT DIRECTION (deg)	COURSE LENGTH (feet)	TRUE VERTICAL DEPTH (feet)	VERTICAL SECTION (feet)	RECTANGULAR COORDINATES (feet)	DOGLEG SEVERITY DG/100FT
0	6280.0	0.20	192.550	0.0	6279.4	-26.8	34.2 N 29.6 E	0.00
1	6327.0	17.40	240.800	47.0	6325.7	-20.8	30.7 N 23.4 E	36.74
2	6359.0	29.40	246.600	32.0	6355.0	-9.9	25.2 N 12.0 E	38.14
3	6391.0	40.80	243.700	32.0	6381.1	6.1	17.4 N 4.7 W	36.00
4	6422.0	51.60	239.900	31.0	6402.6	24.8	6.8 N 24.3 W	35.93
5	6453.0	62.60	236.900	31.0	6419.4	45.7	6.0 S 46.4 W	36.40
6	6485.0	75.30	236.300	32.0	6430.8	69.2	23.9 S 71.3 W	39.73
7	6514.0	87.30	235.300	29.0	6435.2	91.5	39.0 S 95.0 W	41.52
8	6546.0	92.20	239.500	32.0	6435.4	116.9	56.6 S 121.9 W	20.17
9	6577.0	92.80	245.300	31.0	6434.0	143.1	70.9 S 149.3 W	18.79
10	6609.0	93.10	247.100	32.0	6432.4	171.2	83.8 S 178.6 W	5.70
11	6640.0	95.60	248.600	31.0	6430.0	198.8	95.5 S 207.0 W	9.40
12	6672.0	95.20	252.900	32.0	6427.0	227.9	106.0 S 237.0 W	13.44
13	6703.0	95.40	252.800	31.0	6424.1	256.5	115.1 S 266.0 W	0.72
14	6734.0	97.10	256.500	31.0	6420.8	285.5	123.2 S 296.5 W	13.07
15	6765.0	98.10	260.600	31.0	6416.7	315.0	129.3 S 326.6 W	13.50
16	6798.0	98.60	260.900	33.0	6411.9	346.7	134.6 S 358.8 W	1.76
17	6829.0	97.50	263.800	31.0	6407.5	376.7	138.7 S 389.2 W	9.92
18	6861.0	94.90	264.400	32.0	6404.1	408.0	141.9 S 420.9 W	8.34
19	6892.0	95.60	263.500	31.0	6401.2	438.3	145.2 S 451.6 W	3.67
20	6924.0	97.80	262.400	32.0	6397.5	469.4	149.1 S 483.1 W	7.68
21	6955.0	98.00	262.400	31.0	6393.2	499.4	153.1 S 513.5 W	0.65
22	6986.0	94.20	263.300	31.0	6389.9	529.6	157.0 S 544.1 W	12.59
23	7018.0	92.90	263.300	32.0	6388.0	560.9	160.7 S 575.8 W	4.06
24	7049.0	91.30	263.000	31.0	6386.8	591.2	164.4 S 606.6 W	5.25
25	7081.0	92.80	263.500	32.0	6385.7	622.6	168.2 S 638.4 W	4.94
26	7113.0	92.00	263.600	32.0	6384.3	654.0	171.8 S 670.1 W	2.52
27	7144.0	92.00	264.600	31.0	6383.3	684.4	174.9 S 700.9 W	3.22
28	7176.0	91.40	264.500	32.0	6382.3	715.9	178.0 S 732.8 W	1.90
29	7208.0	88.30	264.200	32.0	6382.4	747.4	181.1 S 764.6 W	9.73
30	7239.0	87.70	264.300	31.0	6383.5	777.9	184.2 S 795.5 W	1.96
31	7270.0	87.50	264.600	31.0	6384.8	808.3	187.2 S 826.3 W	1.16
32	7302.0	87.30	264.700	32.0	6386.2	839.8	190.2 S 858.1 W	0.70
33	7334.0	89.40	263.400	32.0	6387.1	871.3	193.5 S 889.9 W	7.72
34	7365.0	88.80	263.900	31.0	6387.6	901.7	197.0 S 920.7 W	2.52
35	7397.0	89.30	263.800	32.0	6388.2	933.1	200.4 S 952.5 W	1.59

S #	MEASURED DEPTH (feet)	DRIFT ANGLE (deg)	DRIFT DIRECTION (deg)	COURSE LENGTH (feet)	TRUE VERTICAL DEPTH (feet)	VERTICAL SECTION (feet)	--- RECTANGULAR COORDINATES (feet)	DOGLEG SEVERITY DG/100FT
36	7428.0	88.60	262.500	31.0	6388.7	963.5	204.1 S 983.3 W	4.76
37	7460.0	88.80	262.400	32.0	6389.5	994.8	208.3 S 1015.0 W	0.70
38	7491.0	88.30	262.800	31.0	6390.2	1025.1	212.3 S 1045.8 W	2.07
39	7523.0	86.20	261.800	32.0	6391.9	1056.3	216.6 S 1077.4 W	7.27
40	7555.0	86.10	262.300	32.0	6393.9	1087.4	221.0 S 1109.1 W	1.59
41	7586.0	85.50	262.200	31.0	6396.2	1117.6	225.1 S 1139.7 W	1.96
42	7618.0	86.70	260.900	32.0	6398.4	1148.7	229.8 S 1171.3 W	5.52
43	7650.0	87.20	260.800	32.0	6400.1	1179.8	234.9 S 1202.8 W	1.59
44	7681.0	88.50	264.200	31.0	6401.2	1210.0	239.0 S 1233.5 W	11.73
45	7713.0	89.10	266.000	32.0	6401.9	1241.6	241.7 S 1265.4 W	5.93
46	7745.0	91.00	269.200	32.0	6401.9	1273.3	243.0 S 1297.4 W	11.63
47	7775.0	92.60	271.800	30.0	6400.9	1303.2	242.8 S 1327.3 W	10.17
48	7807.0	94.30	279.900	32.0	6399.0	1335.1	239.5 S 1359.1 W	25.82
49	7838.0	96.80	288.200	31.0	6396.0	1365.6	232.0 S 1389.0 W	27.84
50	7871.0	94.60	296.900	33.0	6392.7	1396.8	219.5 S 1419.3 W	27.07
51	7903.0	92.90	298.200	32.0	6390.6	1426.2	204.7 S 1447.6 W	6.68
52	7934.0	93.50	298.000	31.0	6388.9	1454.6	190.1 S 1474.9 W	2.04
53	7966.0	100.50	298.000	32.0	6385.0	1483.7	175.2 S 1502.9 W	21.87
54	7998.0	103.00	297.500	32.0	6378.5	1512.5	160.6 S 1530.6 W	7.96
55	8029.0	98.60	299.900	31.0	6372.7	1540.3	146.0 S 1557.3 W	16.10
56	8061.0	98.50	299.000	32.0	6367.9	1569.1	130.4 S 1584.9 W	2.80
57	8092.0	95.20	304.800	31.0	6364.2	1596.4	114.2 S 1611.0 W	21.41
58	8123.0	90.90	309.800	31.0	6362.6	1622.5	95.4 S 1635.6 W	21.25
59	8155.0	91.40	309.000	32.0	6361.9	1648.8	75.1 S 1660.3 W	2.95
60	8187.0	91.80	303.100	32.0	6361.0	1676.1	56.3 S 1686.2 W	18.47
61	8218.0	91.70	302.000	31.0	6360.1	1703.4	39.6 S 1712.3 W	3.56
62	8249.0	91.70	301.700	31.0	6356.2	1731.0	23.3 S 1738.6 W	0.97
63	8281.0	90.40	303.500	32.0	6358.6	1759.3	6.0 S 1765.6 W	6.94
64	8313.0	91.40	303.800	32.0	6358.1	1787.2	11.7 N 1792.2 W	3.26
65	8343.0	89.50	305.500	30.0	6357.8	1813.2	28.7 N 1816.9 W	8.50
66	8375.0	87.90	303.600	32.0	6358.6	1841.0	46.9 N 1843.2 W	7.76
67	8407.0	89.10	298.300	32.0	6359.4	1869.6	63.3 N 1870.7 W	16.98
68	8438.0	90.90	291.100	31.0	6359.4	1898.7	76.3 N 1898.8 W	23.94
69	8470.0	90.80	282.900	32.0	6358.9	1930.0	85.6 N 1929.4 W	25.62
70	8501.0	91.20	281.800	31.0	6358.4	1960.7	92.3 N 1959.7 W	3.78
71	8533.0	90.90	282.000	32.0	6357.8	1992.4	98.8 N 1991.0 W	1.13
72	8564.0	90.00	282.800	31.0	6357.6	2023.1	105.5 N 2021.2 W	3.88
73	8596.0	92.00	284.500	32.0	6357.0	2054.7	113.1 N 2052.3 W	8.20
74	8627.0	92.00	281.500	31.0	6355.9	2085.4	120.0 N 2082.5 W	9.67
75	8659.0	92.50	282.300	32.0	6354.7	2117.1	126.6 N 2113.8 W	2.95
76	8690.0	91.50	282.600	31.0	6353.6	2147.8	133.3 N 2144.1 W	3.37

S #	MEASURED DEPTH (feet)	DRIPT ANGLE (deg)	DRIPT DIRECTION (deg)	COURSE LENGTH (feet)	TRUE VERTICAL DEPTH (feet)	VERTICAL SECTION (feet)	--- RECTANGULAR COORDINATES (feet)	DOGLEG SEVERITY DG/100FT
77	8722.0	88.40	278.800	32.0	6353.6	2179.6	139.2 N 2175.5 W	15.32
78	8753.0	88.50	279.400	31.0	6354.5	2210.5	144.1 N 2206.1 W	1.96
79	8784.0	91.40	281.400	31.0	6354.5	2241.3	149.7 N 2236.6 W	11.36
80	8816.0	93.10	282.800	32.0	6353.2	2273.1	156.4 N 2267.8 W	6.88
81	8848.0	92.10	282.000	32.0	6351.8	2304.7	163.3 N 2299.1 W	4.00
82	8879.0	92.30	281.500	31.0	6350.6	2335.5	169.6 N 2329.4 W	1.74
83	8911.0	92.40	281.900	32.0	6349.3	2367.2	176.1 N 2360.7 W	1.29
84	8970.0	92.40	281.900	59.0	6346.8	2425.7	188.2 N 2418.4 W	0.00
--- Final Closure Direction:				274.451				
--- Final Closure Distance:				2425.692 feet				

DISTRICT II

P.O. Box Drawer DD, Artesia, NM 88211-0719

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV

P.O. Box 2088, Santa Fe, NM 87504-2088

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

Revised February 10, 199

Instructions on back
Submit to Appropriate District Office

State Lease - 4 Copie

Fee Lease - 3 Copie

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 3002512387	² Pool Code 18830	³ Pool Name DOLLARHIDE TUBB DRINKARD
⁴ Property Code 010926	⁵ Property Name WEST DOLLARHIDE DRINKARD UNIT	⁶ Well No. 88
⁷ OGRID Number 022351	⁸ Operator Name TEXACO EXPLORATION & PRODUCTION INC.	⁹ Elevation 3148' KB


¹⁰ Surface Location

Ul or lot no	Section	Township	Range	Lot.Idn	Feet From The	North/South Line	Feet From The	East/West Line	County
A	5	25S	38E		667	NORTH	500	EAST	LEA

¹¹ Bottom Hole Location If Different From Surface

Ul or lot no	Section	Township	Range	Lot.Idn	Feet From The	North/South Line	Feet From The	East/West Line	County
C	5	25S	38E		479 498	NORTH	2918 2362	WEST E	LEA
¹² Dedicated Acre 120	¹³ Joint or Infill No	¹⁴ Consolidation Code	¹⁵ Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

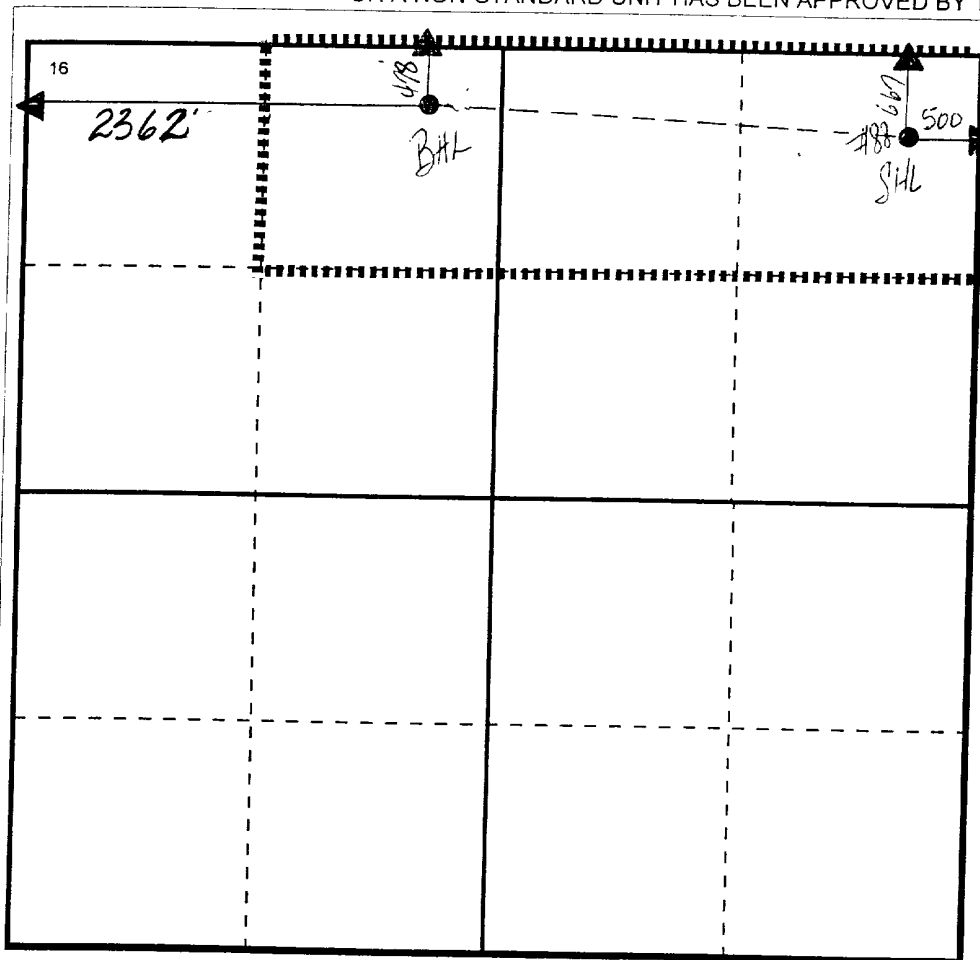

0 330 660 990 132 165 1980 2310 2640 2000 1500 1000 500 0

17 OPERATOR CERTIFICATION

I hereby certify that the information
contained herein is true and complete to the
best of my knowledge and belief

Signature

J. Denise Leake

Printed Name

J. Denise Leake

Positio

Regulatory Specialist

Date

3/18/02

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown
on this plat was plotted from field notes of
actual surveys made by me or under my
supervision, and that the same is true and
correct to the best of my knowledge and
belief.

Date Surveyed

Signature & Seal of
Professional Surveyor

Certificate No.