

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103

Revised March 25, 1999

WELL API NO. 30-025-22128
5. Indicate Type of Lease STATE ☐ FEE X ☒
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name: Clift Property No. 008976
8. Well No. 6
9. Pool name or Wildcat Langlie Mattix 7 Rrvs Qn Grbrg 37240

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: Oil Well X ☒ Gas Well ☐ Other ☐	
2. Name of Operator Permian Resources, Inc. OGRID No. 25797	
3. Address of Operator P.O. Box 590 Midland, Texas 79701	
4. Well Location Unit Letter <u>M</u> : <u>660</u> feet from the <u>South</u> line and <u>660</u> feet from the <u>West</u> line Section <u>8</u> Township <u>23S</u> Range <u>37E</u> NMPM Lea County	
10. Elevation (Show whether DR, RKB, RT, GR, etc.) 3328' GL	

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒ XX

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
☐ PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Permian Resources, Inc. respectfully submits the attached P&A procedure on the Clift well No. 6 for your approval.
We will notify the OCD 48 hours prior to plugging.

THE COMMISSION MUST BE NOTIFIED 24
HOURS PRIOR TO THE BEGINNING OF
PLUGGING OPERATIONS FOR THE C-103
TO BE APPROVED.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Barbara Watson TITLE Regulatory Compliance DATE 5-28-02

Type or print name Barbara Watson

Telephone No. 915/685-0113

(This space for State use)

APPROVED BY GARY W. WINK DATE JUN 05 2002
Conditions of approval, if any: OG FIELD REPRESENTATIVE (JUN 05 2002)

Permian Resources, Inc.

Clift Well No. 6

Langlie Mattix 7 Rivers , Queen, Grayburg

NM OCD Property No. 008976

API No. 30-025-22128

Page 1

Surface Location

660' FSL & 660' FWL

GL 3328'

Unit M, Sec. 8, T23S, R37E

Lea County, NM

Spud Date: June 23, 1967

Originally permitted and drilled by Texas Pacific Oil Company

Existing Wellbore Conditions

TD 3750'

PBTD 3702'

12 1/4" Hole @431'

8 5/8", 24 & 28#/ft, J-55 @336' Cmt'd w/300 sx Cl H
2%CaCl Circ cement

7 7/8" Hole @5397'

5 1/2", 14#/ft, J-55 @3749" Cmt'd w/600 sx
TOC @2295' by TS

Original Completion

Perf'd Grayburg

3544,52,58,69,81,90,95,3607,10,24,29,34,45,49,54,58,76,81,
94,98 20 Holes

Acidized 3544-3698' w/2500 gals 15%NeFe

Grybg Fraced 3544-3698' w/40,000 gals Brine + 43,000
lbs 20/40 sand

POP

7/5/67 ITP 62 BOPD, 83 BWPD

Permian Resources, Inc.

Clift Well No. 6

Langlie Mattix 7 Rivers , Queen, Grayburg

NM OCD Property No. 008976

API No. 30-025-22128

Page 2

Current Equipment

106 jts. 2 3/8", 6.5#. J-55 tbg.
1 - 2" SN (Set @3670')
1 - 2" X 1 1/4" X 10' X 12' RWBC
1 - 3/4" x 4" Perf. Sub
116 - 5/8" Rods
27 - 3/4" Rods
1 - 1 1/2" x 16' PRL
1 - 1 1/4" x 16' PR

1 1/4" x 16' PR w/6' liner
3/4" sub, 3-6', 1-4'

Proposed Procedure to P&A

*******Notify Hobbs New Mexico OCD prior to MIRU 505/393-6161*******

1. POOH & laydown 27 - 3/4" steel rods, 116 - 5/8" steel rods, 1 - 3/4" X 4' Sub, 2" x 1 1/4" x 10' x 12' RWBC pump.
2. POOH w/106 jts 2 3/8" tbg & SN.
3. PU 4 3/4" bit + 5 1/2" x 14#/ft casing scraper & RIH on 2 3/8" tbg to $\pm$ 3540' (Perfs 3544-3698').
4. POOH w/tbg, scraper and bit.
5. PU 5 1/2" CIBP & RIH on 2 3/8" tbg. Set CIBP @3520'.
6. RU cementer & circulate hole with 9.5 ppg mud.
7. Mix & spot 5 sx Cement (47') on top of CIBP.
8. PUH to 2690' Yates top @2640'.
9. Mix and spot 20 sx plug from 2690' to 2497' (193').
10. PUH to 1210' (50' below T/Anhydrite @1160')
11. Mix & spot 20 sx plug from 1210' to 1017' (193').
12. PUH & WOC 4 Hrs. tag plug. Must tag @1110' or higher. If tag below 1110' Mix & repot plug.
13. POOH w/tag.
14. RU Wire line & spot 4 sqz holes @336' (Surface casing shoe).
15. RIH w/tag to 400'. Mix & spot 40 sx cmt from 400' to near surface.
16. POOH w/tag, open 8 5/8" x 5 1/2" annulus valve. RU on 5 1/2" casing w/swedge and displace cut w/5 bbls mud.

Permian Resources, Inc.

Clift Well No. 6

Langlie Mattix 7 Rivers , Queen, Grayburg

NM OCD Property No. 008976


API No. 30-025-22128

Page 3

17. WOC 4 hrs & tag plug @no lower than 286'. If tag below 286', mix & repot plug.
18. PUH w/tag and spot 10 six surface plug.
19. Cut off WH & weld on P & A marker. Clean and restore location.

PERMAIN RESOURCES, INC. WELLBORE DIAGRAM

WELL NAME:	Clift No. 6			FIELD:	Langlie Mattix (7R, QN, GRBG)		
LOCATION:	660' FSL & 660' FWL, Sec 8, T-23-S, R-37-E			COUNTY:	Lea	STATE:	New Mexioc
ELEVATION:	GL = 3328' (10.5' KB Corr)			SPUD DATE:	6/23/67	COMP DATE:	7/5/67
API#	30-025-22128-00-00			PREPARED BY:	M. Stewart		
	DEPTH	HOLE SIZE	SIZE	WEIGHT	GRADE	THREAD	TOC
CASING:	336	11"	8-5/8"	24 & 28 #	H-40	ST&C	Surface
CASING:	3749'	7-7/8"	5-1/2"	14 #	J-55	ST&C	2295' TS
CASING:							
TUBING:							
TUBING:							

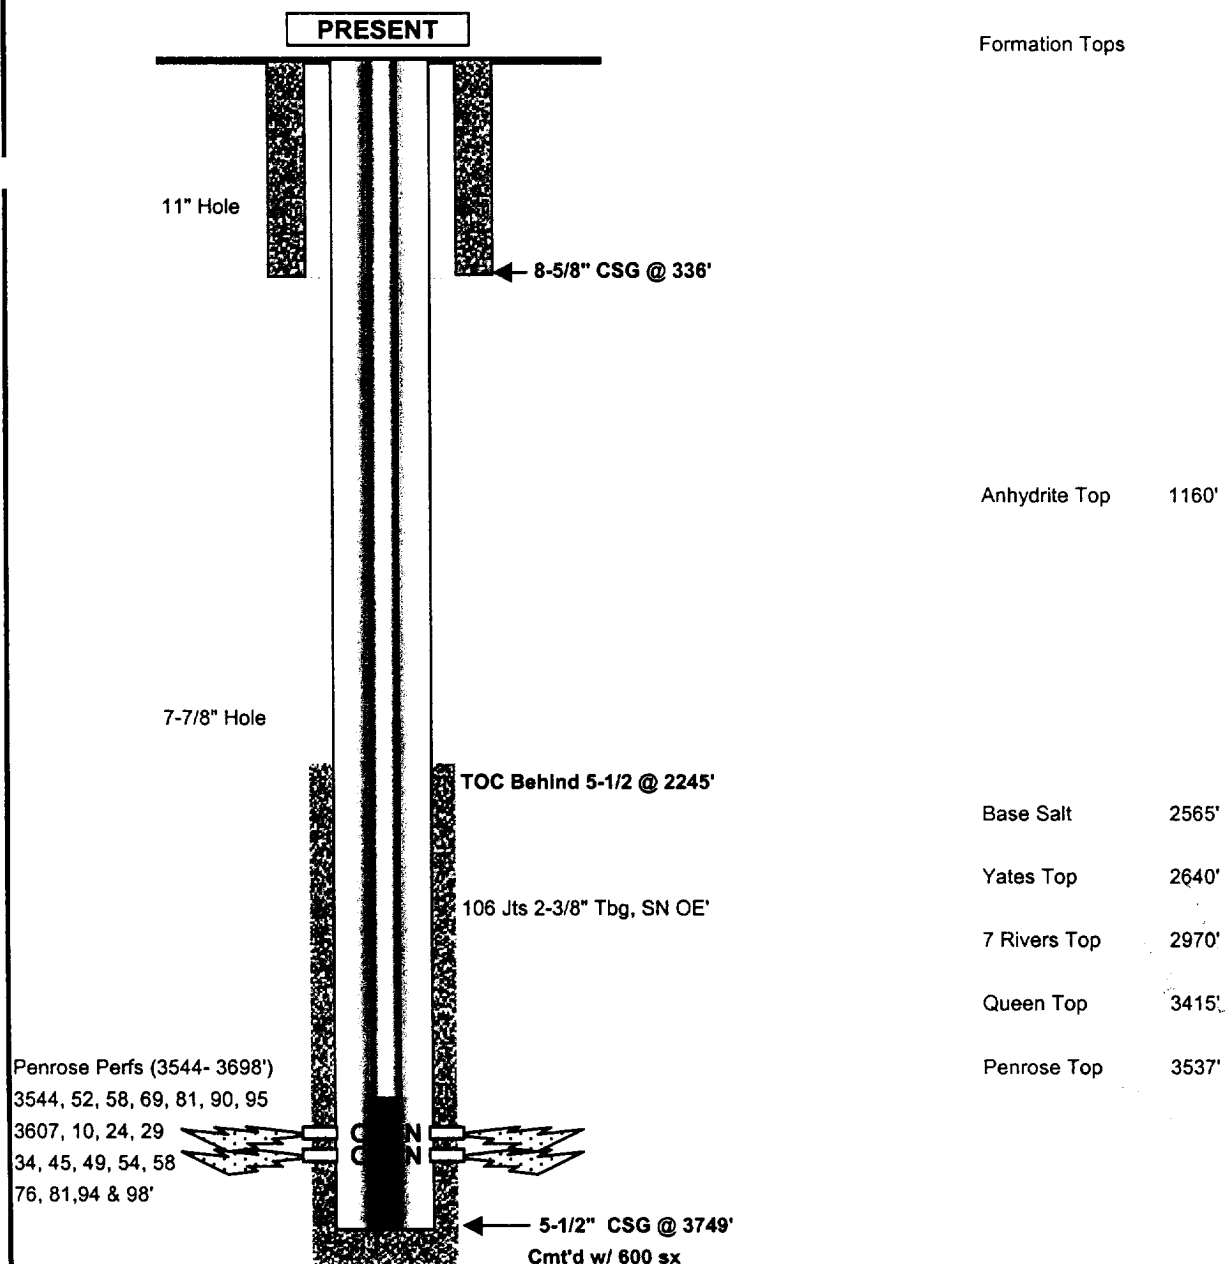

PERMAIN RESOURCES, INC. WELLBORE DIAGRAM

WELL NAME:	Clift No. 6			FIELD:	Langlie Mattix (7R, QN, GRBG)		
LOCATION:	660' FSL & 660' FWL, Sec 8, T-23-S, R-37-E			COUNTY:	Lea	STATE:	New Mexico
ELEVATION:	GL = 3328' (10.5' KB Corr)			SPUD DATE:	6/23/67	COMP DATE:	7/5/67
API#	30-025-22128-00-00			PREPARED BY:	M. Stewart		
	DEPTH	HOLE SIZE	SIZE	WEIGHT	GRADE	THREAD	TOC
CASING:	336	11"	8-5/8"	24 & 28 #	H-40	ST&C	Surface
CASING:	3749'	7-7/8"	5-1/2"	14 #	J-55	ST&C	2295' TS
CASING:							
TUBING:							
TUBING:							

