

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE
(Other instructions on
reverse side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

LC 030176-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1.

OIL
WELL ☐GAS
WELL ☐

OTHER

Gas Storage

2. NAME OF OPERATOR

El Paso Natural Gas Company

3. ADDRESS OF OPERATOR

1800 Wilco Building, Midland, Texas 79701

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)

At surface

1980 FSL & 1980 FEL

7. UNIT AGREEMENT NAME

Rhodes Storage

8. FARM OR LEASE NAME

Rhodes GU

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Rhodes

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 9, T-26-S, R-37-F

12. COUNTY OR PARISH

Lea

New Mexico

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

2951.1 Gr

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETION

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

csg, tbg, & acidize

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any
proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent
to this work.)*Ran: 8 5/8" ST&C set @ 621'. Cmt'd w/200 sxs 50-50 Pozmix, followed w/150 sxs C1 "C".
Circ cement.Ran: 4 1/2" 10.5# K-55 csg set @ 3046'. Cmt'd w/200 sxs 50-50 Pozmix followed w/200
sxs C1 "C". Top of cement @ 1980'.

Ran: Seating nipple & 94 jts. 2 3/8" tbg set @ 2956'.

Perf: 2714 to 2989, 2995 to 3012'.

Acidized w/5000 gals MS acid & displaced w/48 bbls KCL water.

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE Production Clerk


DATE 9-17-73

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

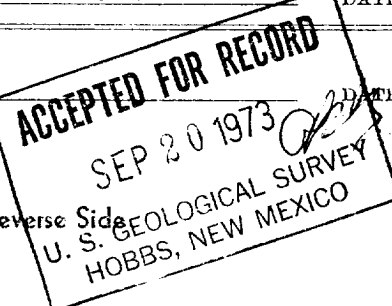

*See Instructions on Reverse Side