

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

New Mexico Oil Conservation District I

1625 N. Franklin

Albuquerque, NM 87102

FORM APPROVED

Budget Bureau No. 1004-0135

Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

Oil Gas
☒ Well ☐ Well ☐ Other

2. Name of Operator

Primal Energy Corporation

3. Address and Telephone No.

211 Highland Cross #227, Houston, TX 77073 (281)821-5600

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Unit H, 1980' FNL & 660' FEL, Sec. 12, T24S, R32E

5. Lease Designation and Serial No.

NM02889

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Wimberly #3

9. API Well No.

30-025-24468

10. Field and Pool, or Exploratory Area

Triple X Delaware

11. County or Parish, State

Lea, NM

12. **CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

NOTE Prior to step 2, the casing will be tested. If OK, we will ask for Temporary Abandonment.

1. POOH with all production equipment.
2. Set 200' cement plug with 30 sxs. from 4750' to 4950'.
3. Perforate at 350' and cement annulus to surface (below retainer) using 70 sxs.
4. Set 50' surface plug. Erect dry hole marker. Clean and restore location.

SEE INSTRUCTIONS ON REVERSE SIDE
COMPLETION OF APPROVAL

14. I hereby certify that the foregoing is true and correct

Signed

Title Manager, Operations & Engineering

Date November 8, 1999

(This space for Federal or State office use)

Approved

(ORIG. SGD.) GARY GOURLEY

Title

Date

DEC 10 1999

Conditions of Approval, if any:

Title 18 U.S.C. Section 101, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

See Instructions On Reverse Side

52 GWW

✓

BLM
ROSWELL, N.M.


NOV 15 99

REIVED

R

11/15/99
11/15/99
11/15/99

Wimberly # 3
 1980/N 66°E
 12-H-24-32

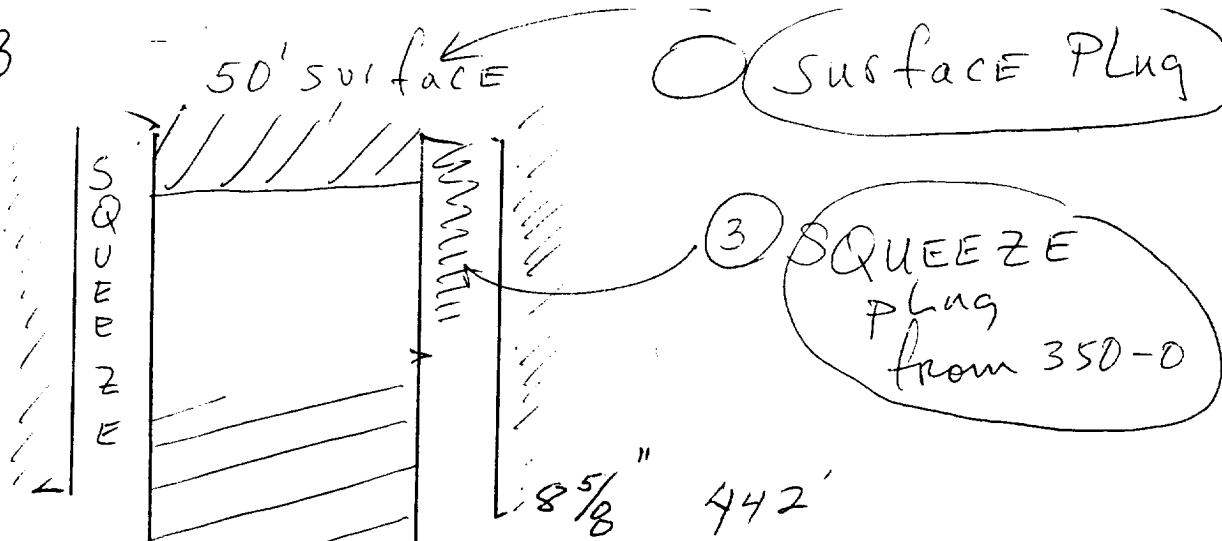

1332
 - 442

 890'
 66SX (2)
 100' across salt
 50' across shoe
 Plug 2
 66-75SX

+ +
 + +
 + +
 +

+ + + 1332 TOP/SALT
 +
 + +
 +

TOC 3380'

+ +
 + +
 + + 4650 - BASE OF SALT

PLUG 1

4650
 - 5034

 384 FT
 28SX
 to cover
 from bottom
 across Perfs
 and across BASE/SALT

PERFS 4,983'
 5,001'
 5029'
 5 1/2" 5034' PB
 5070'

Gary Gourlay
 BLM