


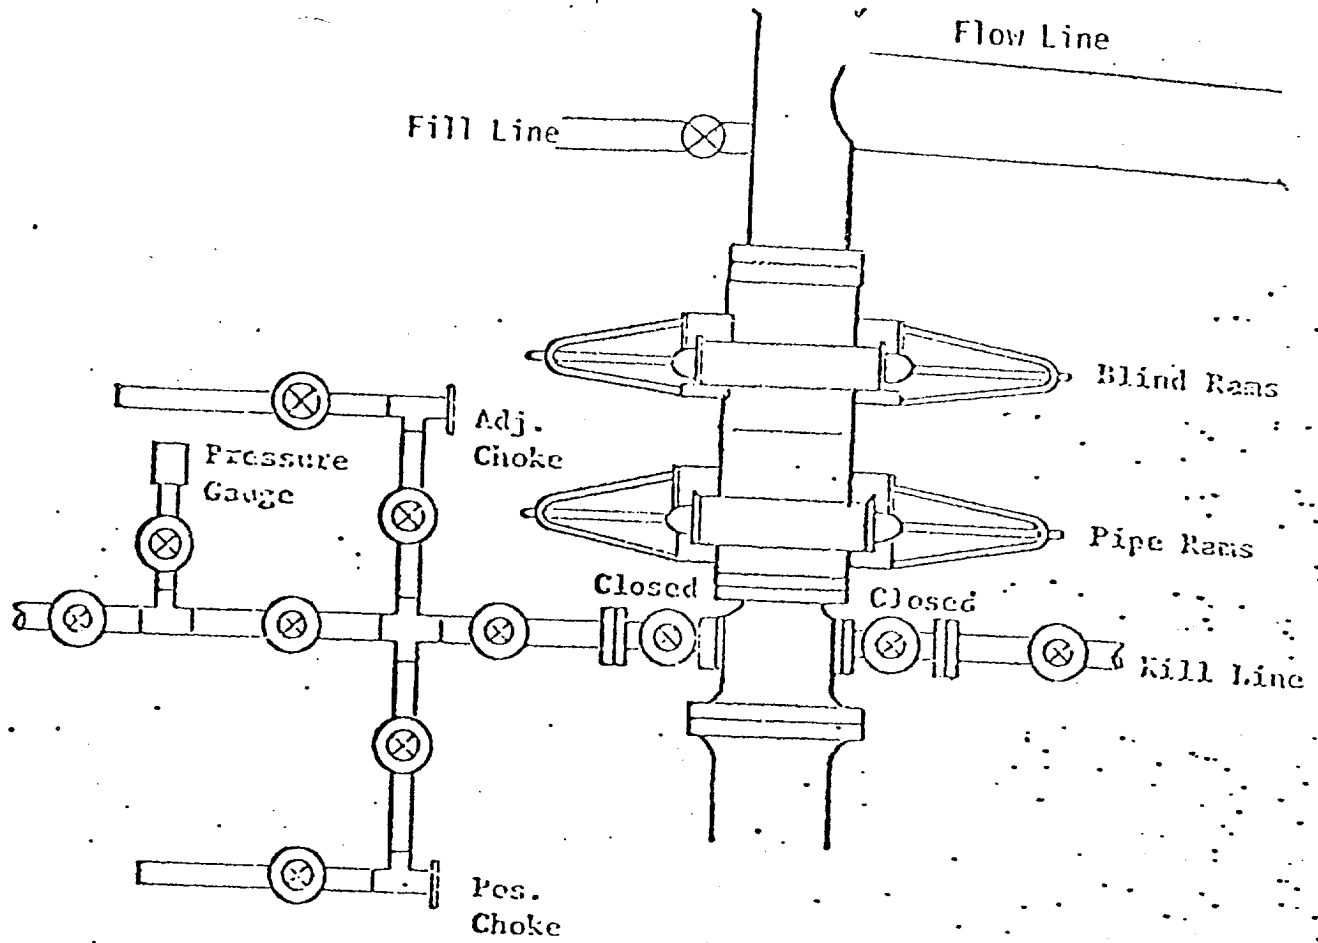

All valves 2"

All BOP's, flanges, spools, valves & lines must be series 900 or 3000 psi working press.

Choke manifold must be at ground level and extended out from under substructure.

TENNECO OIL COMPANY

REQUIRED MINIMUM BLOWOFF PREVENTOR

HOOVER

Denver, Colorado

RECEIVED

JAN 20 1977
OIL CONSERVATION COMM.
HOBBS, N. M.