

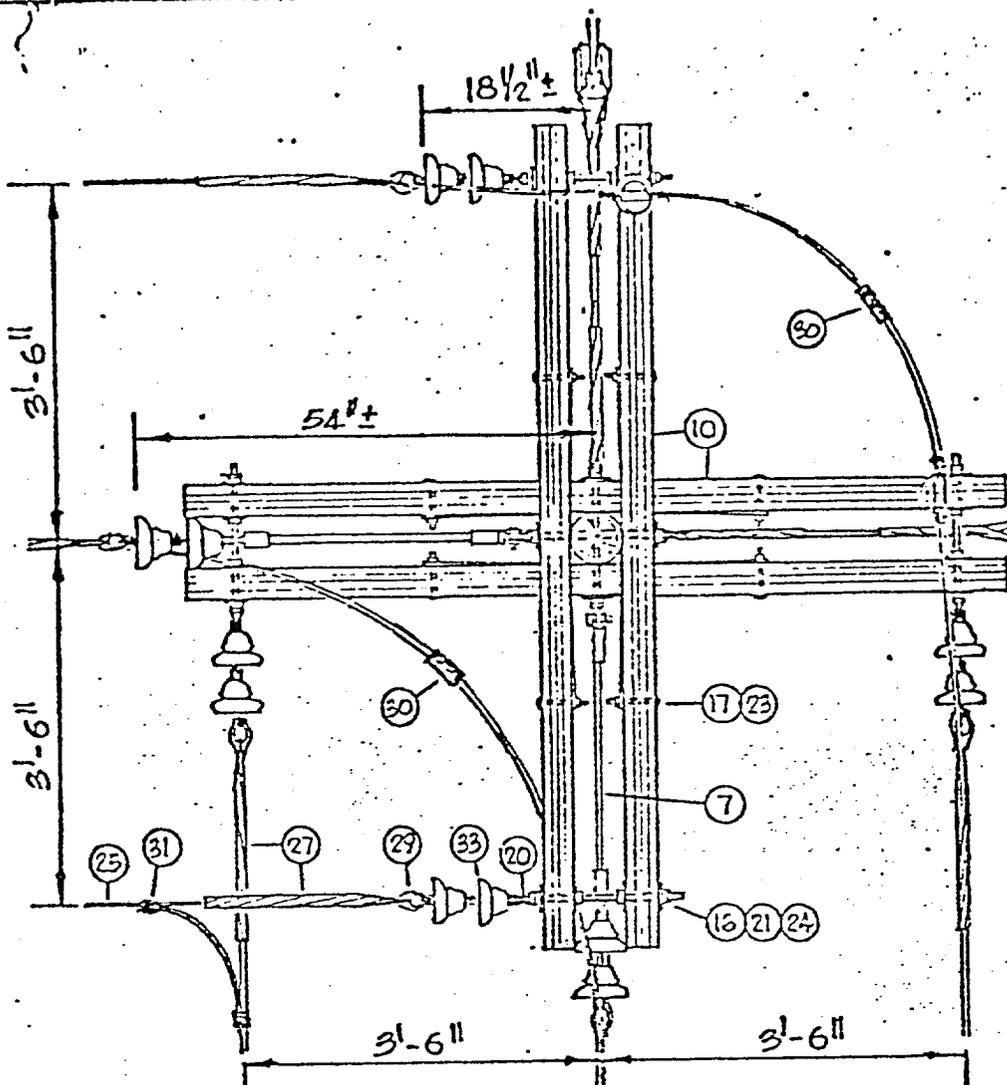


Normal Phasing



For Material see Dwg. 403013-A

Guy leads will be 1:1 on angles of 80°-90° and 4:3 on angles of 60°-79°.

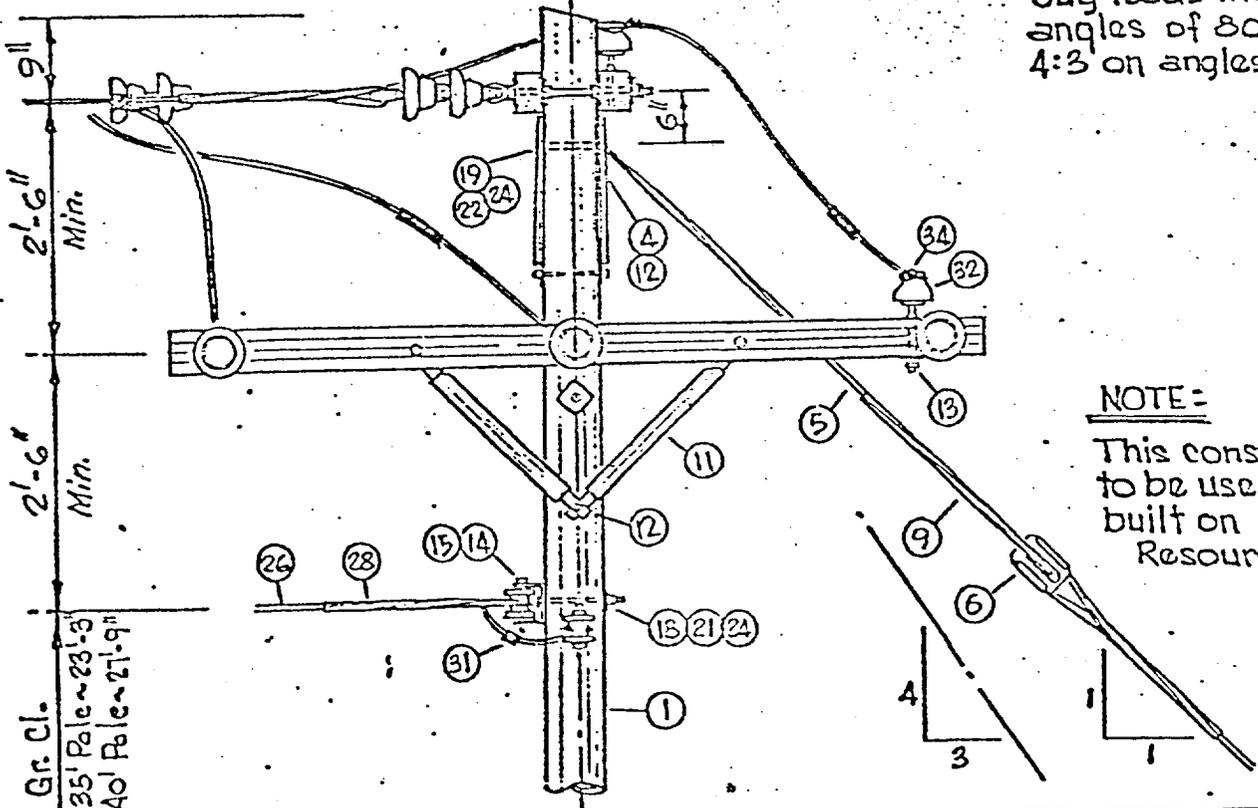

NOTE: This construction std. to be used on all lines built on National Resource Lands.

REVISIONS

DESCRIPTION DATE BY

DATE: 4-22-77

TITLE: PRIMARY ANGLE STRUCTURE

RECEIVED
FEBRUARY 1977

OIL CONSERVATION COMM.
HOBBS, N. M.