

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

RECEIVED
JUL 18 1978
U. S. GEOLOGICAL SURVEY
HOBBS NEW MEXICO

1. oil well ☒ gas well ☐ other ☐
2. NAME OF OPERATOR
GIFFORD, MITCHELL & WISENBAKER
3. ADDRESS OF OPERATOR
1280 MNB Tower Midland, Texas 79701
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 660' FNL & 660' FWL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) Setting Casing	

5. LEASE
N.M. 6726
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
N/A
7. UNIT AGREEMENT NAME
Undesignated NA
8. FARM OR LEASE NAME
Standing Bear Federal
9. WELL NO.
1
10. FIELD OR WILDCAT NAME
Wildcat
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 5, T-26-S, R-36-E
12. COUNTY OR PARISH
Lea
13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
GR = 3001'

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

8 5/8" casing was run to 1342'. Halliburton cemented with 350 sacks Lite Wate with 2% CACL mixed at 11.9 ppg followed by 400 sacks Class C Neat. Bumped plug at 8:30 p.m. 7/3/78. Circ 160 SX

Drilling ahead on 7/4/78.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.


18. I hereby certify that the foregoing is true and correct

SIGNED Teranna Seidelberg TITLE Production Clerk DATE 7/13/78

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

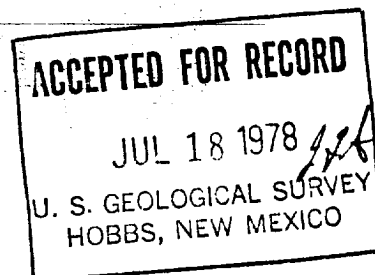

RECEIVED

JUL 14 1978

INFORMATION COMM.
LOS AN. M.

RECEIVED

JUL 26 1978

INFORMATION COMM.
LOS AN. M.