
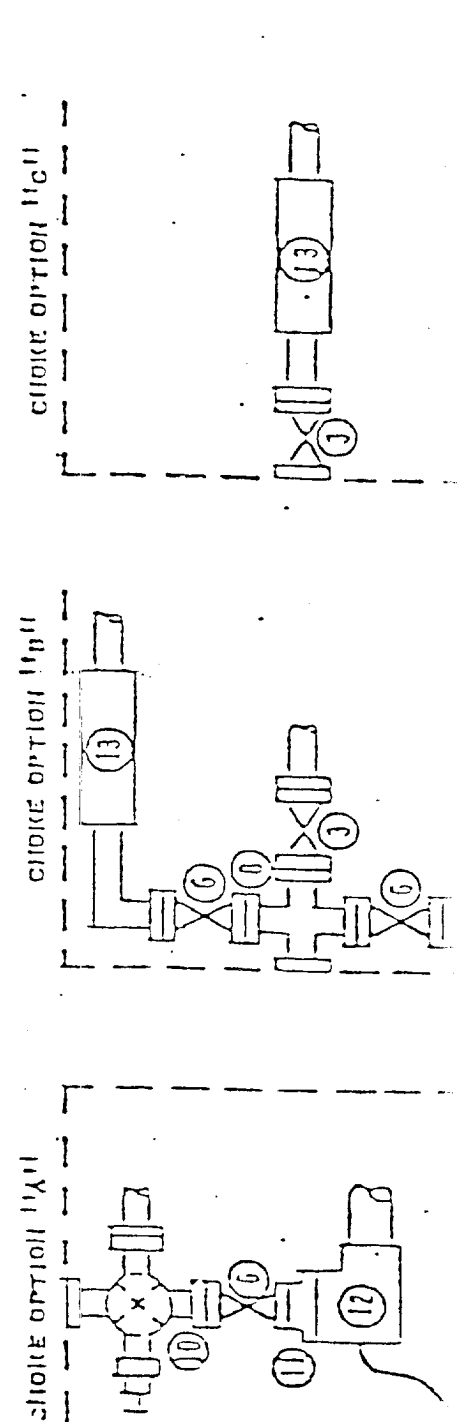
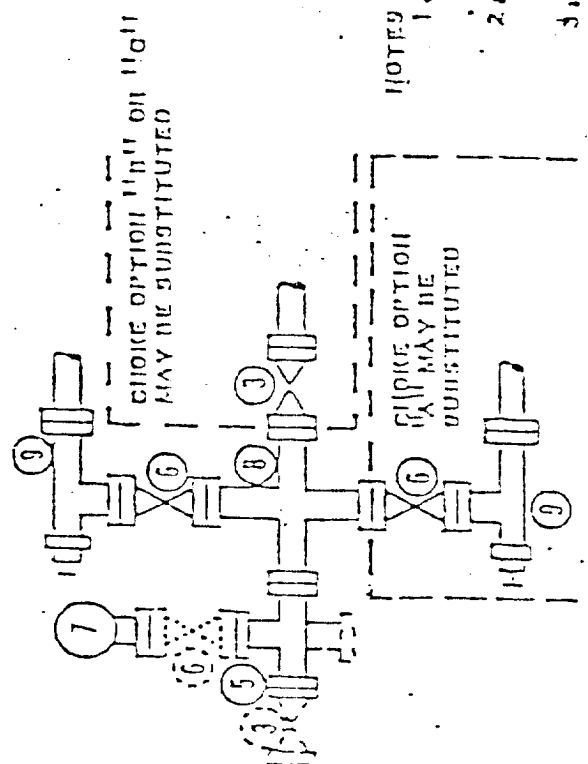


----- OPTIONAL EQUIPMENT

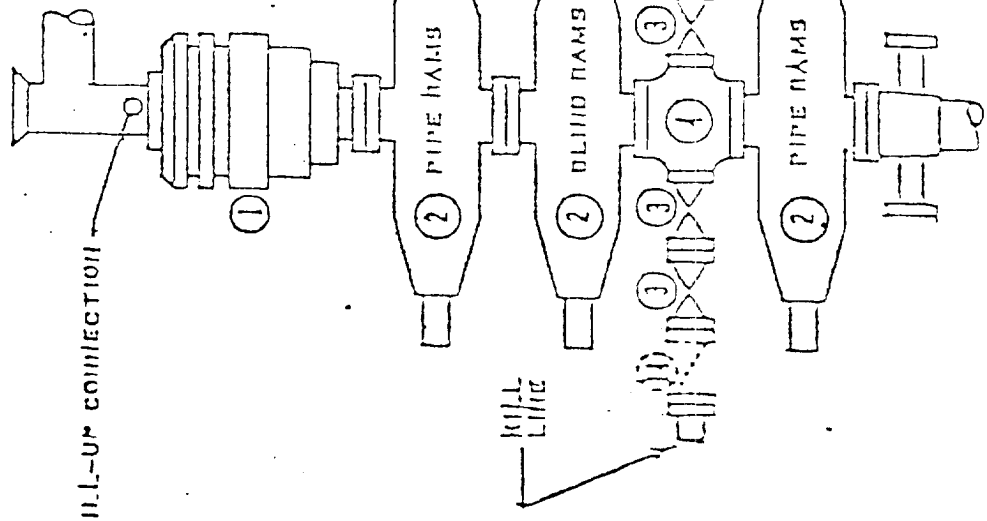

NOTES

- 1. 5000 PSI WP OR BETTER CLAMP HAMS MAY BE SUBSTITUTED FOR FLANGES
- 2. ONE ADJUSTABLE CHOKE MAY BE REPLACED WITH A POSITIVE CHOKE
- 3. VALVES MAY BE EITHER HAND OR POW OPERATED BUT, IF POWER OPERATED, THE VALVES FLANGED TO THE TOP MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY ON CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

- 1 2" GEN. 1500 HYDRAUL. GIK
- 2 2" GEN. 1500 HAND-TYPE HOP (8)
- 3 3" GEN. 1500 VALVE
- 4 2" GEN. 1500 DRILLING SPOOL
- 5 3" GEN. 1500 X 2" GEN. 1500 STEEL TEE
- 6 2" GEN. 1500 VALVE
- 7 2" MUD PRESSURE GAUGE
- 8 3" GEN. 1500 X 2" GEN. 1500 STEEL CROSS
- 9 2" GEN. 1500 ADJ. CHOKE
- 10 2" GEN. 1500 ADJ. CHOKE OR 2" GEN. 1500 HISEN VALVE ON SIDE OUTLET OF 2" GEN. 1500 STEEL TEE
- 11 ADAPTER, 2" GEN. 1500 X 10,000 LI FLANGE MATING 13 INLET
- 12 10,000 LB WP REMOTE CHOKE
- 13 HYDRAULIC CHOKE, 2000 LB WP OR BETTER
- 14 3" GEN. 1500 CHECK VALVE

5000 PSI WORKING PRESSURE
BLOWOUT PREVENTER HOOK-UP
(SERIES 1500 FLANGES OR BETTER)