

N. M. OIL CONS. COMMISSION
P. O. BOX 1980
HOBBS, NEW MEXICO 88240

Form 9-331
Dec. 1973

Form Approved.
Budget Bureau No. 42-R1424

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐
well well

2. NAME OF OPERATOR
Amoco Production Company

3. ADDRESS OF OPERATOR
P. O. Box 68, Hobbs, NM 88240

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1980' FSL X 1980' FEL, Sec. 6
AT TOP PROD. INTERVAL: (Unit J, NW/4, SE/4)
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

Status Report

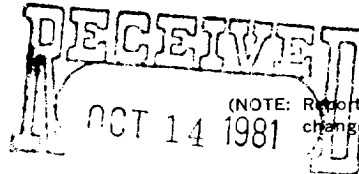

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Well blew out 8-10-81. TD was 15935'. Well was shut-in by closing blind rams. Bleed off pressure and killed well with total of 941 bbls. of mud. Snubbed in 28 jts 2-7/8" drill pipe. Snubbed in 38 jts 2-7/8" drill pipe. Released pressure dart valve and would not hold. Pulled up and snub in 77 joints 2-7/8" drill pipe. Pulled up and snubbed in 118 jts 2-7/8" drill pipe for total of 9608' of drillpipe. Pumped 184 bbl. mud down annulus. Snubbed in 113 jts 2-7/8" drill pipe. Snubbed in 76 joints 2-7/8" drill pipe. Tagged up at 15600' and bit at 15585'. Circulated and no gas. Riggged down snubbing unit. Circulated and no flare. Repaired derrick.

0+4-USGS, R 1-Hou 1-Susp 1-W. Stafford, Hou 1-MDR 1-Superior

Subsurface Safety Valve: Manu. and Type

Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE

Adm. Analyst DATE 10-9-81

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

OCT 16 1981
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO