

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other

2. NAME OF OPERATOR

THE SUPERIOR OIL COMPANY

3. ADDRESS OF OPERATOR

P.O. Box 3901, Midland, Texas 79702

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 1980' FNL & 1968' FWL of Sec. 19

AT TOP PROD. INTERVAL:

AT TOTAL DEPTH: straight hole

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

CHANGE ZONES ☐

ABANDON\* ☐

(other) Drilling operations

5. LEASE

NM - 17241

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Smith Federal

9. WELL NO.

1

10. FIELD OR WILDCAT NAME

Wildcat

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 19, T24S-R34E

12. COUNTY OR PARISH

Lea


13. STATE

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

3555 GR

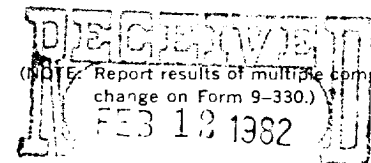

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

OIL & GAS  
U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

01-23-82: Circ & cond hole, prep to log.

01-24-82: Ram logs. Cond mud and circ.

01-25-82: RU csg crew, prep PV 5 1/2" liner.

01-26-82: Ram & cmtd 5 1/2" liner from 12,101' - 15,120' and cmtd w/ 1150 sx Class H, 3#/sx KCl, .6% Halad - 22A, .4% CFR-2. Slurry wt 15.7#. Bumped plug w/ 1800 PSI - O.K. WOC 24 hrs.

01-27-82: WOC, svc rig, wash to bottom, POH to run RTTS tool.

01-28-82: Test liner to 2500# - O.K. prep LD DP.

01-29-82: LD DP & DC's, ND BOP.

01-30-82: ND BOP, put blind flange on tubing hanger, cleaned pits. Rig released 1:00 p.m. 1-29-82.

Subsurface Safety Valve: Manu. and Type

Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED FOR RECORD  
ROGER A. CATMAN

TITLE Prod. Supt.

DATE February 10, 1982

(This space for Federal or State office use)

APPROVED BY DATE FEB 10 1982  
CONDITIONS OF APPROVAL, IF ANY:

TITLE DATE

U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO