

UNITED STATES DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY
N. M. OIL & GAS DIVISION
P. O. BOX 1980
HOBBS, NEW MEXICO 88240

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM-31220

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Farnsworth Federal

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Scarborough

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Section 18, T-26-S,
R-37-E, NMPM

12. COUNTY OR PARISH

Lea

13. STATE

New Mexico

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR

Doyle Hartman

3. ADDRESS OF OPERATOR

P. O. Box 10426 Midland, Texas 79702

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.)

At surface

660 FSL and 660 FEL Section 18

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

2963.0 GL

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

REPAIRING WELL

FRACTURE TREATMENT

ALTERING CASING

SHOOTING OR ACIDIZING


ABANDONMENT*

(Other) spud & set casing

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded well at 7:00 p. m. CDT 6-24-82. Drilled 12 1/4" hole to a total depth of 425'. Ran 12 joints (426.73') of 9 5/8" OD, 36 lb/ft, Grade B, ST&C casing and landed at 425' RKB. Cemented casing with 225 sx of API Class C cement containing 2% CaCl₂. Plugged down at 10:00 a.m. CDT 6-25-82. Circulated 25 sx of excess cement to pit. WOC 18.5 hours. Pressure tested casing to 700 psi. Pressure held okay.

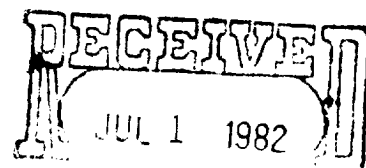

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED *Michelle Nembree*

TITLE Administrative Assistant

DATE 6-28-82

(This space for Federal or State office use)

APPROVED BY *J. R. G.*
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

OCT 4 1982

U.S. GEOLOGICAL SURVEY See Instructions on Reverse Side
ROSWELL, NEW MEXICO