



**DRILLING CONTROL  
CONDITION II-B 3000 WP  
FOR AIR DRILLING OR  
WHERE NITROGEN OR AIR BLOWS ARE EXPECTED**

H<sub>2</sub>S TRIM REQUIRED  
YES ☒ NO ☐

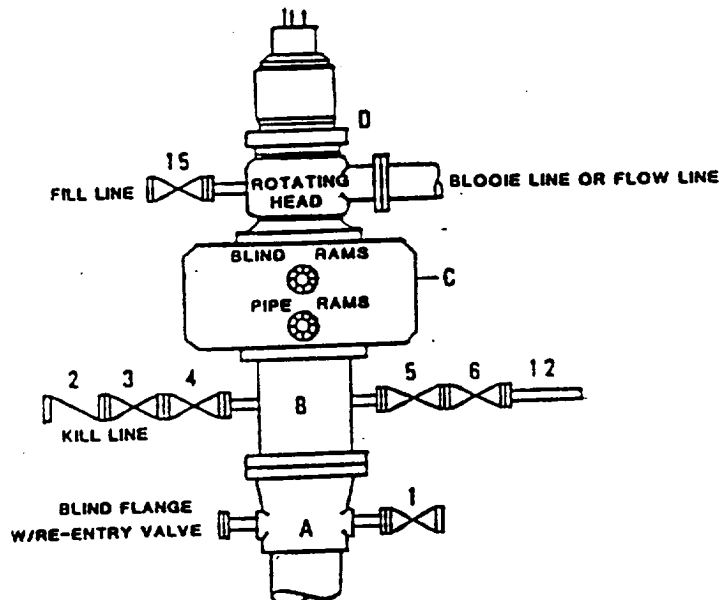

**DRILLING CONTROL**

**MATERIAL LIST - CONDITION II - B**

- |                |                                                                                                                                                                                                     |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A              | Texaco Wellhead                                                                                                                                                                                     |
| B              | 3000# W.P. drilling spool with a 2" minimum flanged outlet for kill line and 3" minimum flanged outlet for choke line.                                                                              |
| C              | 3000# W.P. Dual ram type preventer, hydraulic operated with 1" steel, 3000# W.P. control lines (where sub-structure height is adequate, 2 - 3000# W.P. single ram type preventers may be utilized). |
| D              | Rotating Head with fill up outlet and extended Blooe Line.                                                                                                                                          |
| 1,3,4,<br>7,8, | 2" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve.                                                                                                     |
| 2              | 2" minimum 3000# W.P. back pressure valve.                                                                                                                                                          |
| 5,6,9          | 3" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve.                                                                                                     |
| 12             | 3" minimum schedule 80, Grade "B", seamless line pipe.                                                                                                                                              |
| 13             | 2" minimum x 3" minimum 3000# W.P. flanged cross.                                                                                                                                                   |
| 10,11          | 2" minimum 3000# W.P. adjustable choke bodies.                                                                                                                                                      |
| 14             | Cameron Mud Gauge or equivalent ( location optional in choke line).                                                                                                                                 |
| 15             | 2" minimum 3000# W.P. flanged or threaded full opening steel gate valve, or Halliburton Lo Torc Plug valve.                                                                                         |



TEXACO, INC.  
HIGHLAND DIVISION  
HIGHLAND, TEXAS



| SCALE       | DATE | EST. NO. | ORIG. NO. |
|-------------|------|----------|-----------|
| DRAWN BY    |      |          |           |
| CHECKED BY  |      |          |           |
| APPROVED BY |      |          |           |

EXHIBIT C

RECEIVED  
JUL 07 1993  
JUL 07 1993  
JUL 07 1993

RECEIVED

JUL 07 1993

JUL 07 1993  
OFFICE