


3M (3,000 psi) Working Pressure

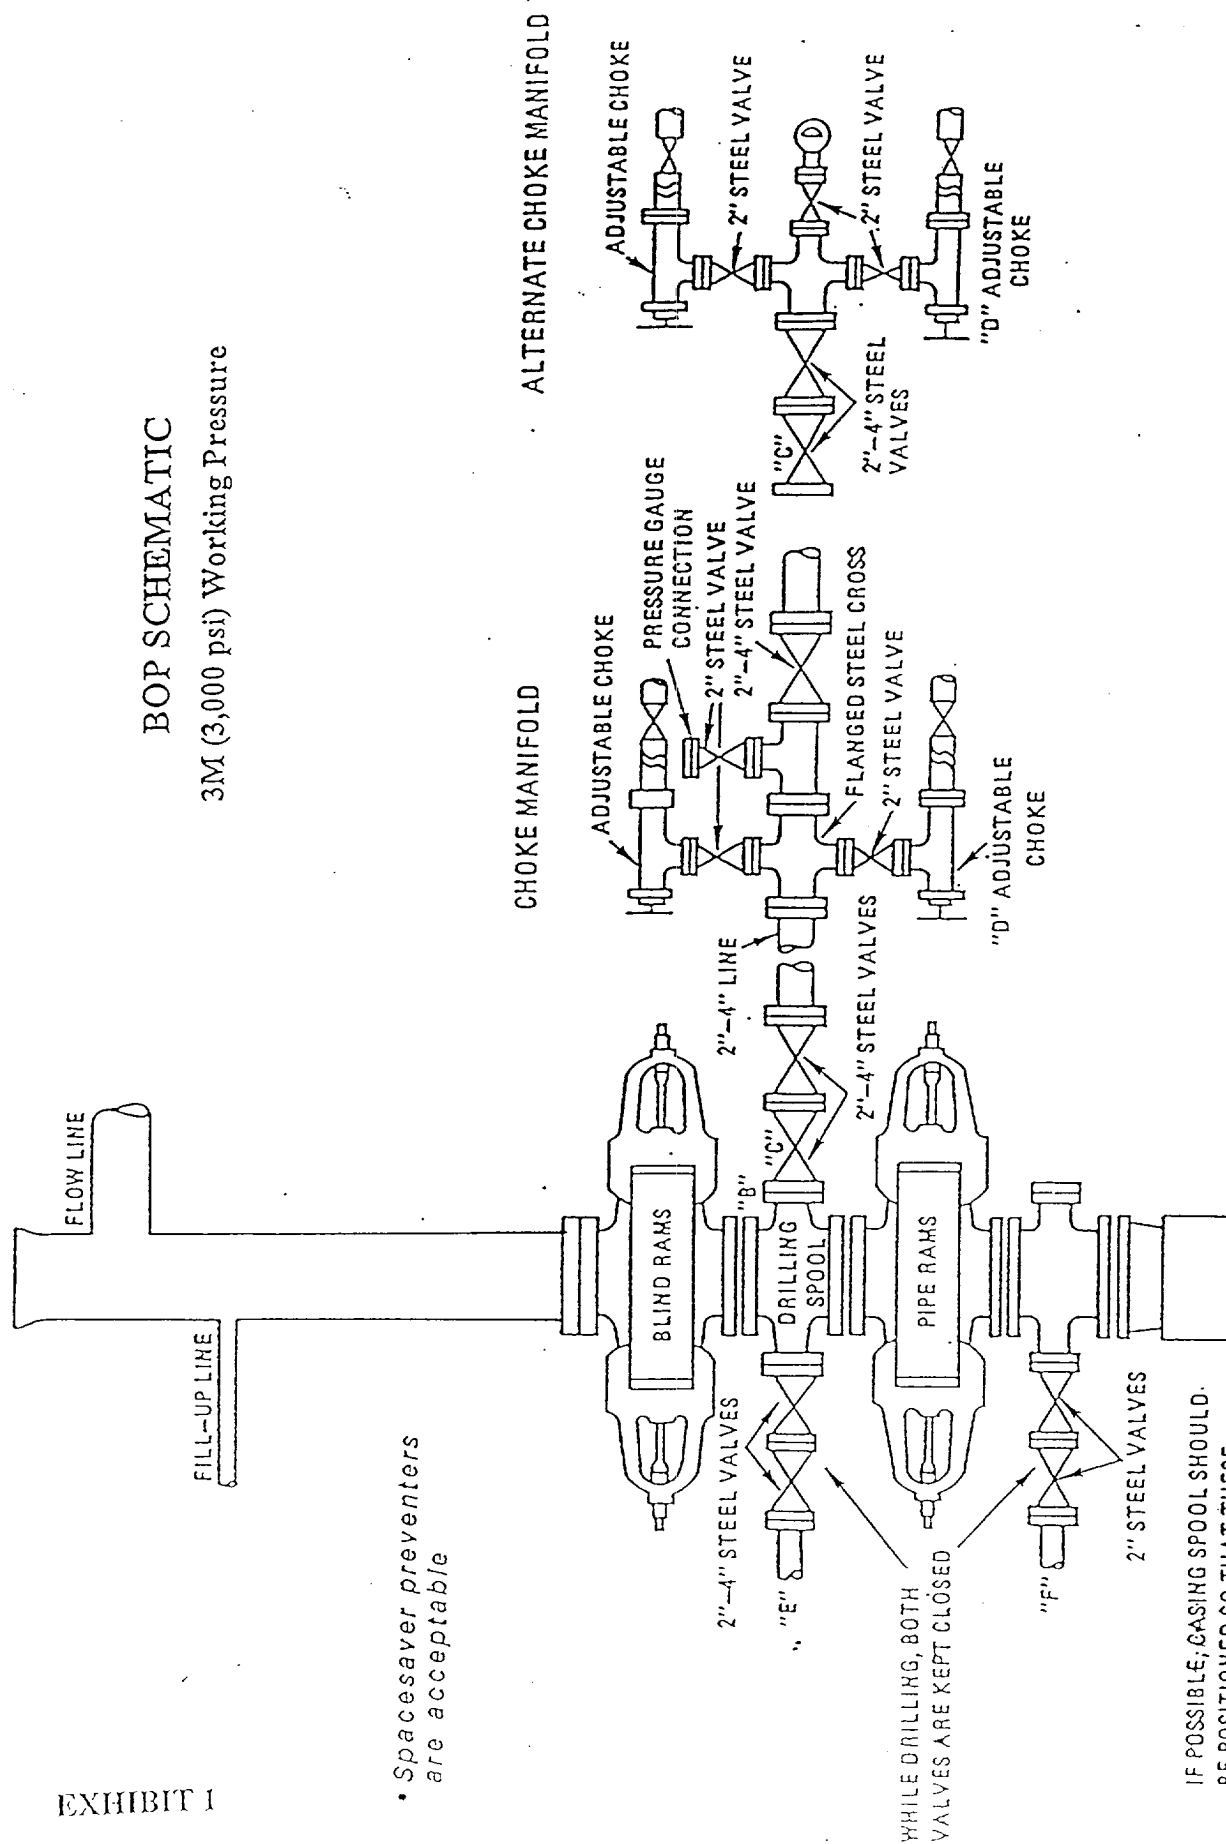

- Spacesaver preventers are acceptable

WHILE DRILLING, BOTH VALVES ARE KEPT CLOSED

IF POSSIBLE, CASING SPOOL SHOULD BE POSITIONED SO THAT THESE VALVES ARE DIRECTLY UNDER THE BARREL OF THE RAM PREVENTER