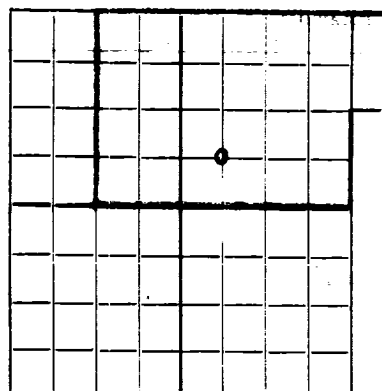


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

DUPLICATE

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gulf Oil Corporation
Company or OperatorJohn A. Stuart
Lease

Well No. 1 in SW NE of Sec. 10, T. 25S
R. 37E, N. M. P. M., Jal Field, Lea County.
Well is 660' feet south of the North line and 660' feet west of the East line of SW NE

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Gulf Oil Corporation Address Tulsa, Oklahoma

Drilling commenced May 9th, 1936. Drilling was completed June 25th, 1936

Name of drilling contractor Milhoan Drlg. Co. Address Tulsa, Oklahoma

Elevation above sea level at top of casing 3120' feet.

The information given is to be kept confidential until ? 19

OIL SANDS OR ZONES

No. 1, from 3375' to 3431' No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from No record - Rotary hole. to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13"	40	8	Lapwld	286'	?			
9-5/8"	36	8	Lapwld	2473'	?			
7" O D	24	10	Lapwld	3264'	?			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15-1/2"	13"	286'	250	Halliburton		
12-1/4"	9-5/8"	2473'	600	Halliburton		
8-5/8"	7"	3264'	200	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3431' feet, and from feet to feet

Cable toops were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing June 27th, 1936

The production of the first 24 hours was 217 barrels of fluid of which % was oil: % emulsion; % water; and % sediment. Gravity, Be.

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 29th,

Tulsa, Oklahoma

August 29th, 1936

day of August, 1936

Name

Position General Superintendent

FORMATION RECORD

Form 100-1

FROM	TO	THICKNESS IN FEET	FORMATION
0	70		surface sand
	120		sand
	265		sand, clay & shells
	305		red rock
	425		red bed & shells
	487		red bed, anhydrite & shells
	537		sand broken
	560		red beds
	1019		red bed & shells
	1035		red beds & anhydrite
	1135		anhydrite
	1265		anhydrite broken
	1330		salt
	1365		anhydrite broken
	1473		salt & shells
	1548		salt
	2026		salt & shells
	2234		salt & anhydrite
	2345		salt
	2400		salt & shells
	2428		anhydrite
	2467		anhydrite & lime
	2475		lime
	2849		lime
	2855		lime - sandy
	2892		lime, show. of gas
	2950		lime - sandy
	3062		lime, sandy grey, broken
	3190		lime
	3204		lime sandy
	3226		lime & anhydrite
	3240		anhydrite, lime & sand
	3270		lime
	3271		sand
	3275		lime
	3280		sand
	3298		sand & lime broken
	3312		lime
	3326		lime broken
	3368		lime broken & sand
	3373		lime
	3377		lime & sand
	3384		lime
	3415		lime broken & sand
	3431		lime
	3431		TOTAL DEPTH